

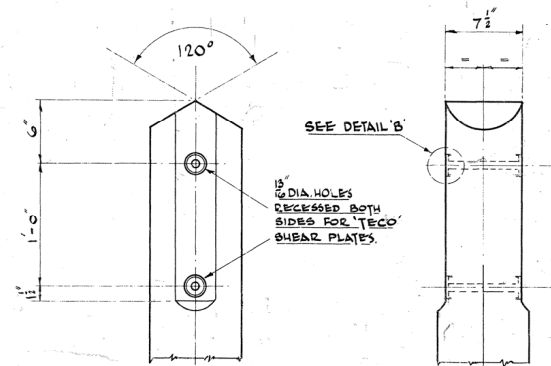


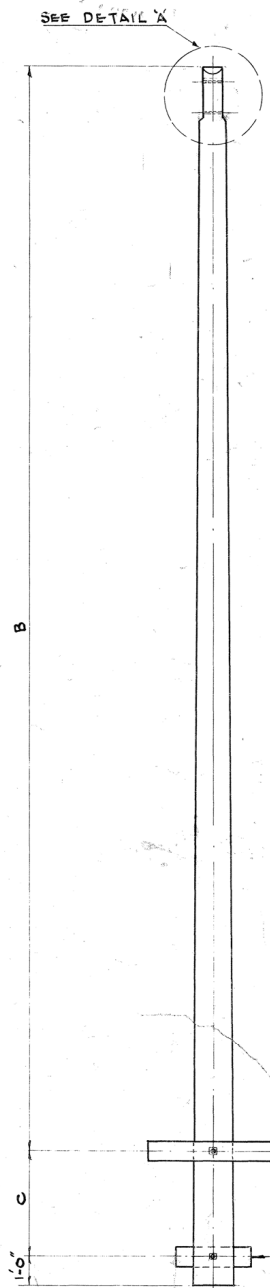

DETAIL A

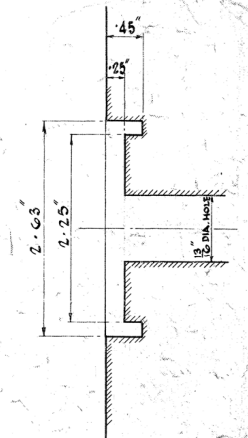

DETAIL B
SECTION THROUGH RECESS

POLE TYPE	ALTERNATIVE 1	ALTERNATIVE 2	BLOCK SIZE			A	B	C
	DOUGLAS FIR POLES	SCANDINAVIAN RED FIR POLES	BLOCK SIZE					
	L x CIRC. AT 0'-0" FROM BUTT	L x DIA. AT 5'-0" FROM BUTT	LENGTH TOP	LENGTH BOTTOM	CROSS SECTION			
SOM 8'-6"	35'-0" x 40"	• 35'-0" x 13"	6'-3"	2'-3"	8" x 4"	33'-6"	30'-6"	3'-6"
SOM 4'-6"	40'-0" x 42"	40'-0" x 13 ³ / ₈ "	6'-3"	2'-3"	10" x 5"	38'-6"	36'-6"	3'-6"
SO	45'-0" x 44"	45'-0" x 14 ¹ / ₂ "	6'-3"	2'-9"	8" x 4"	43'-6"	40'-0"	4'-0"
SOE 4'-6"	50'-0" x 47"	50'-0" x 15 ¹ / ₂ "	6'-3"	2'-9"	8" x 4"	48'-6"	44'-6"	4'-6"
SOE 3'-0"	55'-0" x 50"	55'-0" x 16 ¹ / ₄ "	6'-3"	NIL	8" x 4"	53'-6"	49'-0"	5'-0"

NOTES -

1. ALL HOLES 1 1/2" DIA.
2. POLES TO BE CREOSOTED AFTER FABRICATION.
3. POLES TO BE SUPPLIED WITH TIMBER BLOCKS 1/2" DIA. FIXING BOLTS.
4. ALL NOTCHING TO BE 3/8" DEEP

CENTRAL ELECTRICITY GENERATING BOARD		HEADQUARTERS
CONTRACT:		
132 K.V. WOOD POLE S/C LINES UNEARTHED CONSTRUCTION		
50° TYPE STRUCTURES		
FABRICATION DETAILS		
SCALE: 1/4" = 1'-0" 1/8" = 1'-0" & FULL SIZE		31/2066

DRAWN	H. F. G.	31-10-57
TRACED	H. F. G.	31-10-57
CHECKED	W. J.	11-11-57

B	DOE 4'-0" AND SOE 3'-0" FOUNDATION BLOCK LENGTHS STANDARDISED	D.A.	A	FOUNDATION BLOCK SIZES MODIFIED TO INCREASE F.O.S. FROM 2.5 TO 3.5 ON FOUNDATIONS.	W.F.	6	56
---	---	------	---	--	------	---	----