



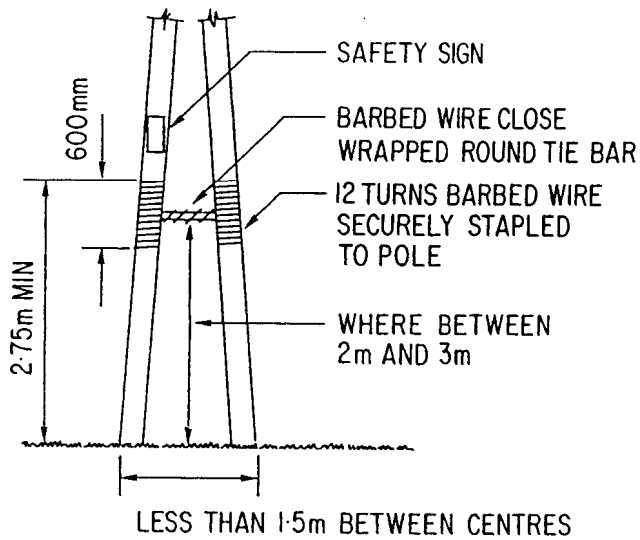

'A' POLE


5

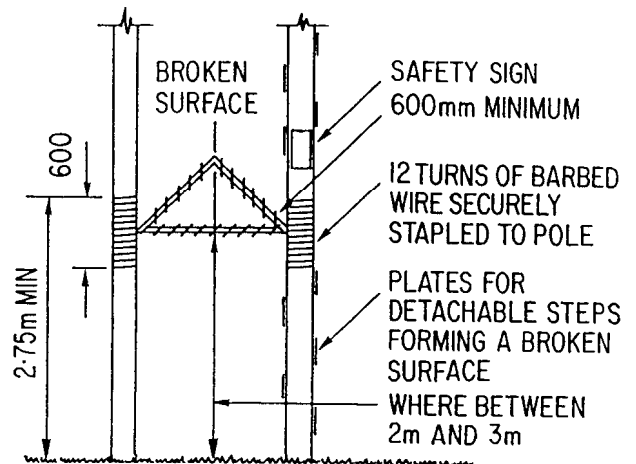

'H' POLE


6

BARBED WIRE TO BE CLOSE WRAPPED ROUND BOTTOM BAR AND ALSO ROUND DIAGONAL BRACING FOR A MINIMUM DISTANCE OF 600mm

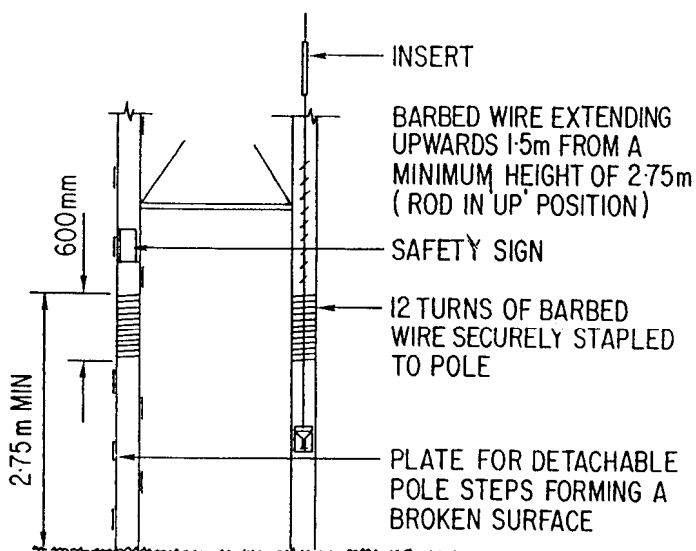

'H' POLE
WITH ROD OPERATED SWITCHGEAR

7

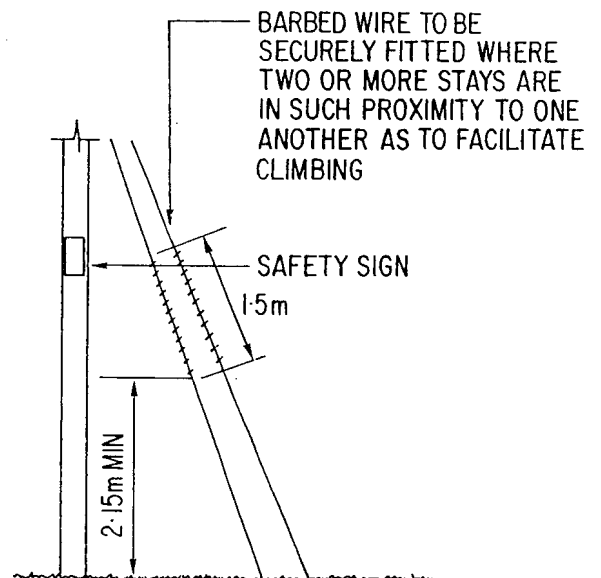

8

NOTE
TWO SAFETY SIGNS SHALL BE FITTED IN ACCORDANCE WITH PARAGRAPH 7.2

Figure 1: Basic Anti-climbing Devices for Poles
EI Drawing 439001 (Part 2)