


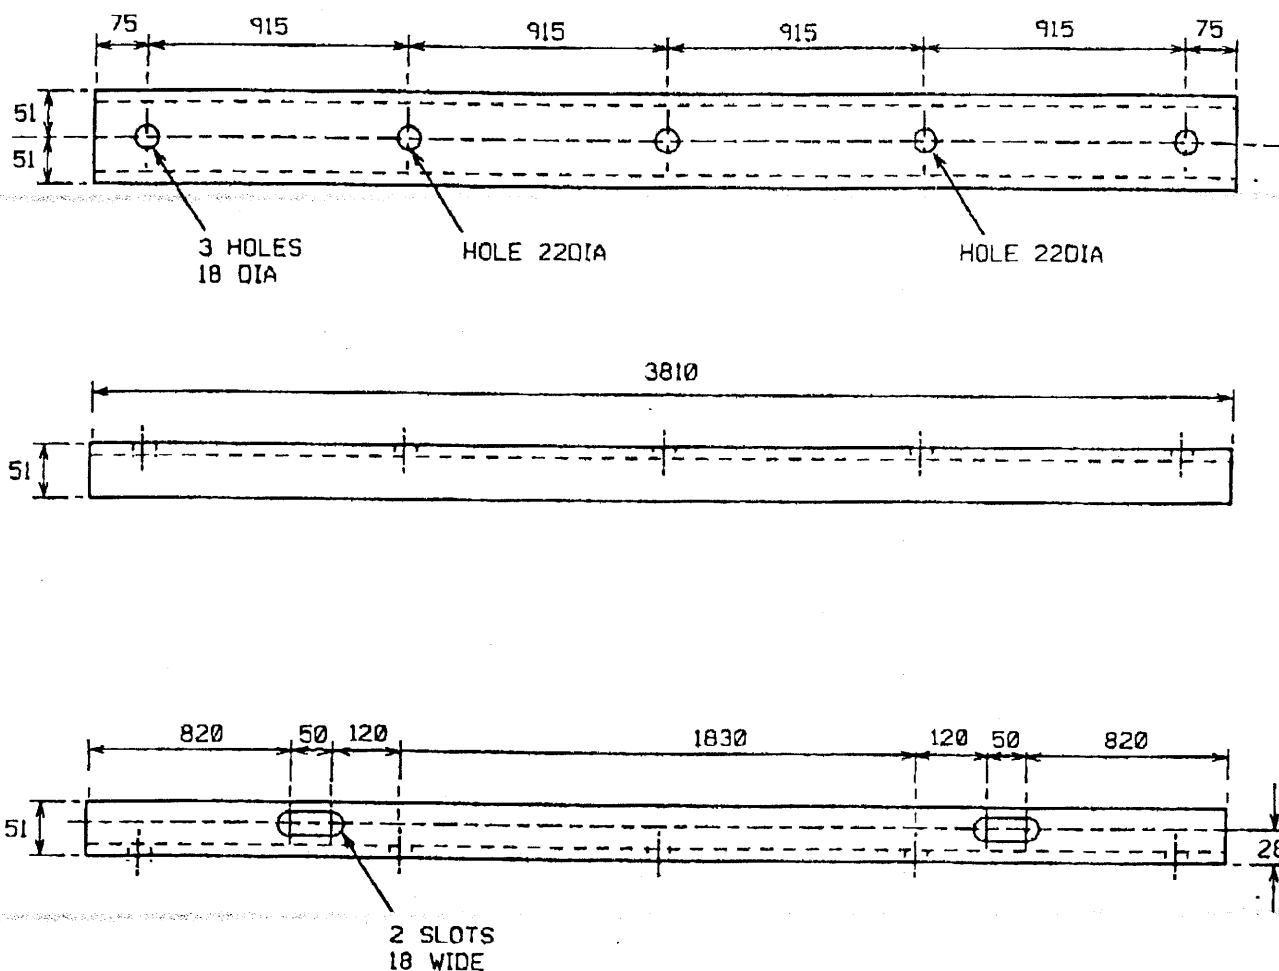

TOLERANCES:- HOLES MEDIUM FIT SERIES OF BSEN 20273 MIN. DIAMETER COLUMN
LENGTHS $< 50\text{mm} \pm 1\text{mm}$
 $> 50\text{mm} \pm 2\text{mm}$

MANUFACTURED TO BS4: PART 1

MATERIAL:- $102 \times 51 \times 10.42 \text{ kg/m}$ CHANNEL GALVANISED TO BS 729

APPLICATION: SCHEDULE A2021

EDCH

DEBURR AND REMOVE ALL SHARP EDGES
COMMODITY CODE 17-912-1

Revisions:-

This drawing is protected by copyright and the information contained therein is confidential. The drawing may not be copied and the information contained therein may not be used or disclosed to a third party wholly or in part except with the written permission of, and in the manner prescribed by SOUTHERN ELECTRIC plc ©1996



**SOUTHERN
ELECTRIC**

**33kV POLYMERIC CABLE AND
SURGE DIVERTER SUPPORT**

Scale:-

Des. by:- HMW

Ted. by:-

Chk. by:-

App. by:- SAC

Dimensions in millimetres

Drawing no.

HQ/38/805

C.A.D. Reference. HQ0805.38

