



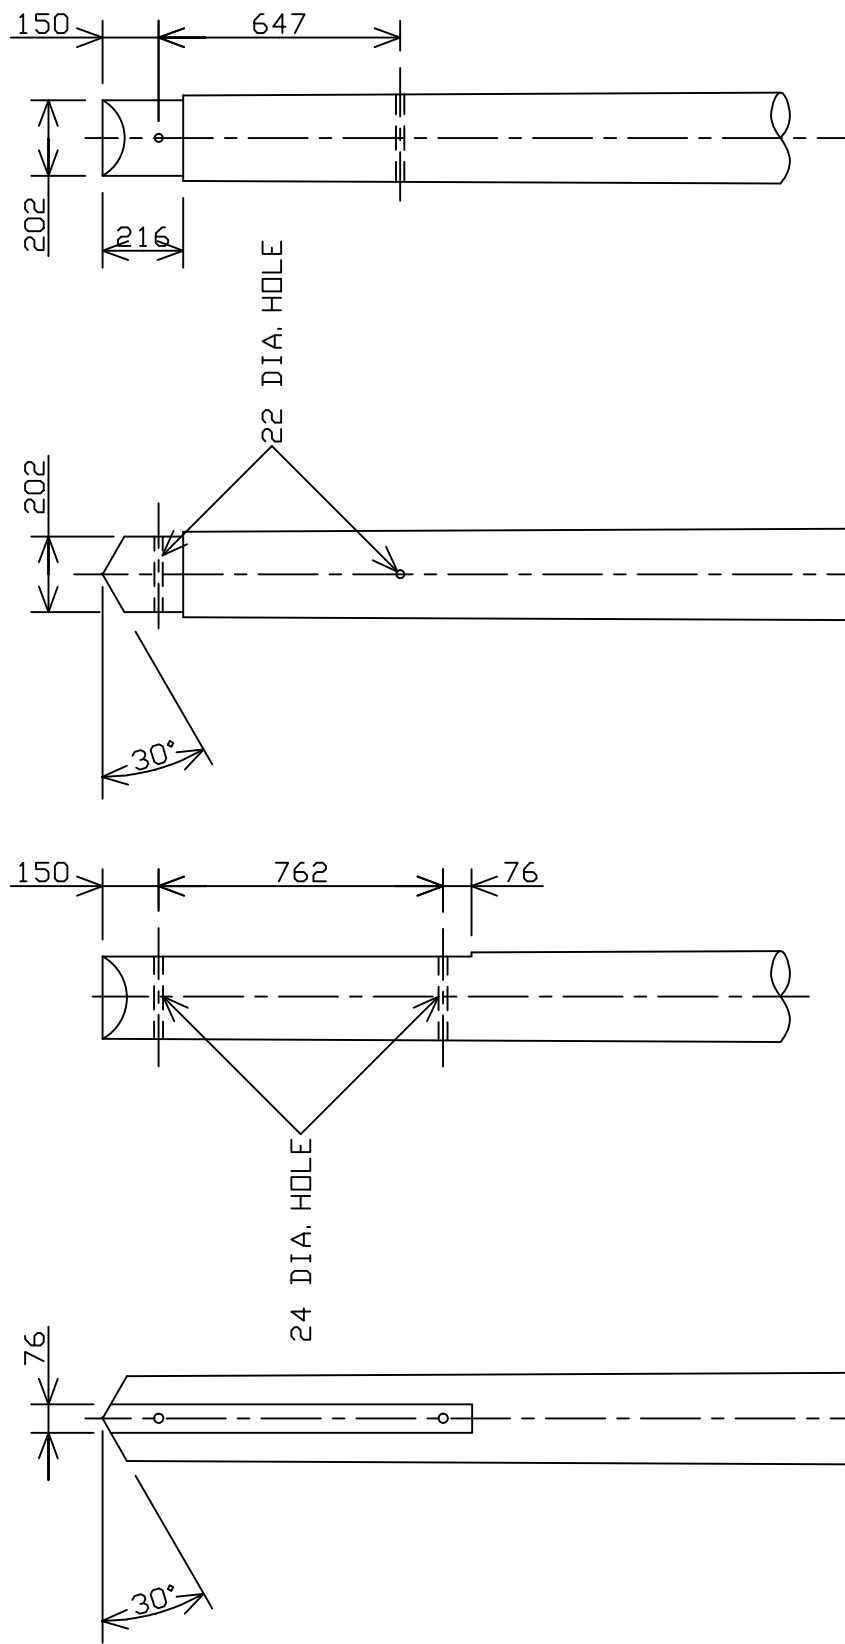

NOTES

1. ANGLE SECTION POLES SHALL HAVE MIN. TOP DIA. OF 222mm.
- * 2. EXCEPT BY SPECIAL INSTRUCTIONS, NO DRILLING OR NOTCHING, FOR BAULKS, IS TO BE CARRIED OUT.
3. ADDITIONAL DRILLING ON ANGLE POLES MAY BE REQUIRED TO DRAWING NO. MNW 12001-067 FOR STAY ATTACHMENT, DETAILS TO BE STATED ON ORDER.

SPECIFIED POLE DIA. (mm) 1.5M FROM BUTT	DIMENSION 'A' *
UP TO 260	1. 1M
265 - 290	1. 2M
300 - 325	1. 4M
330 - 360	1. 5M
365 - 400+	1. 7M

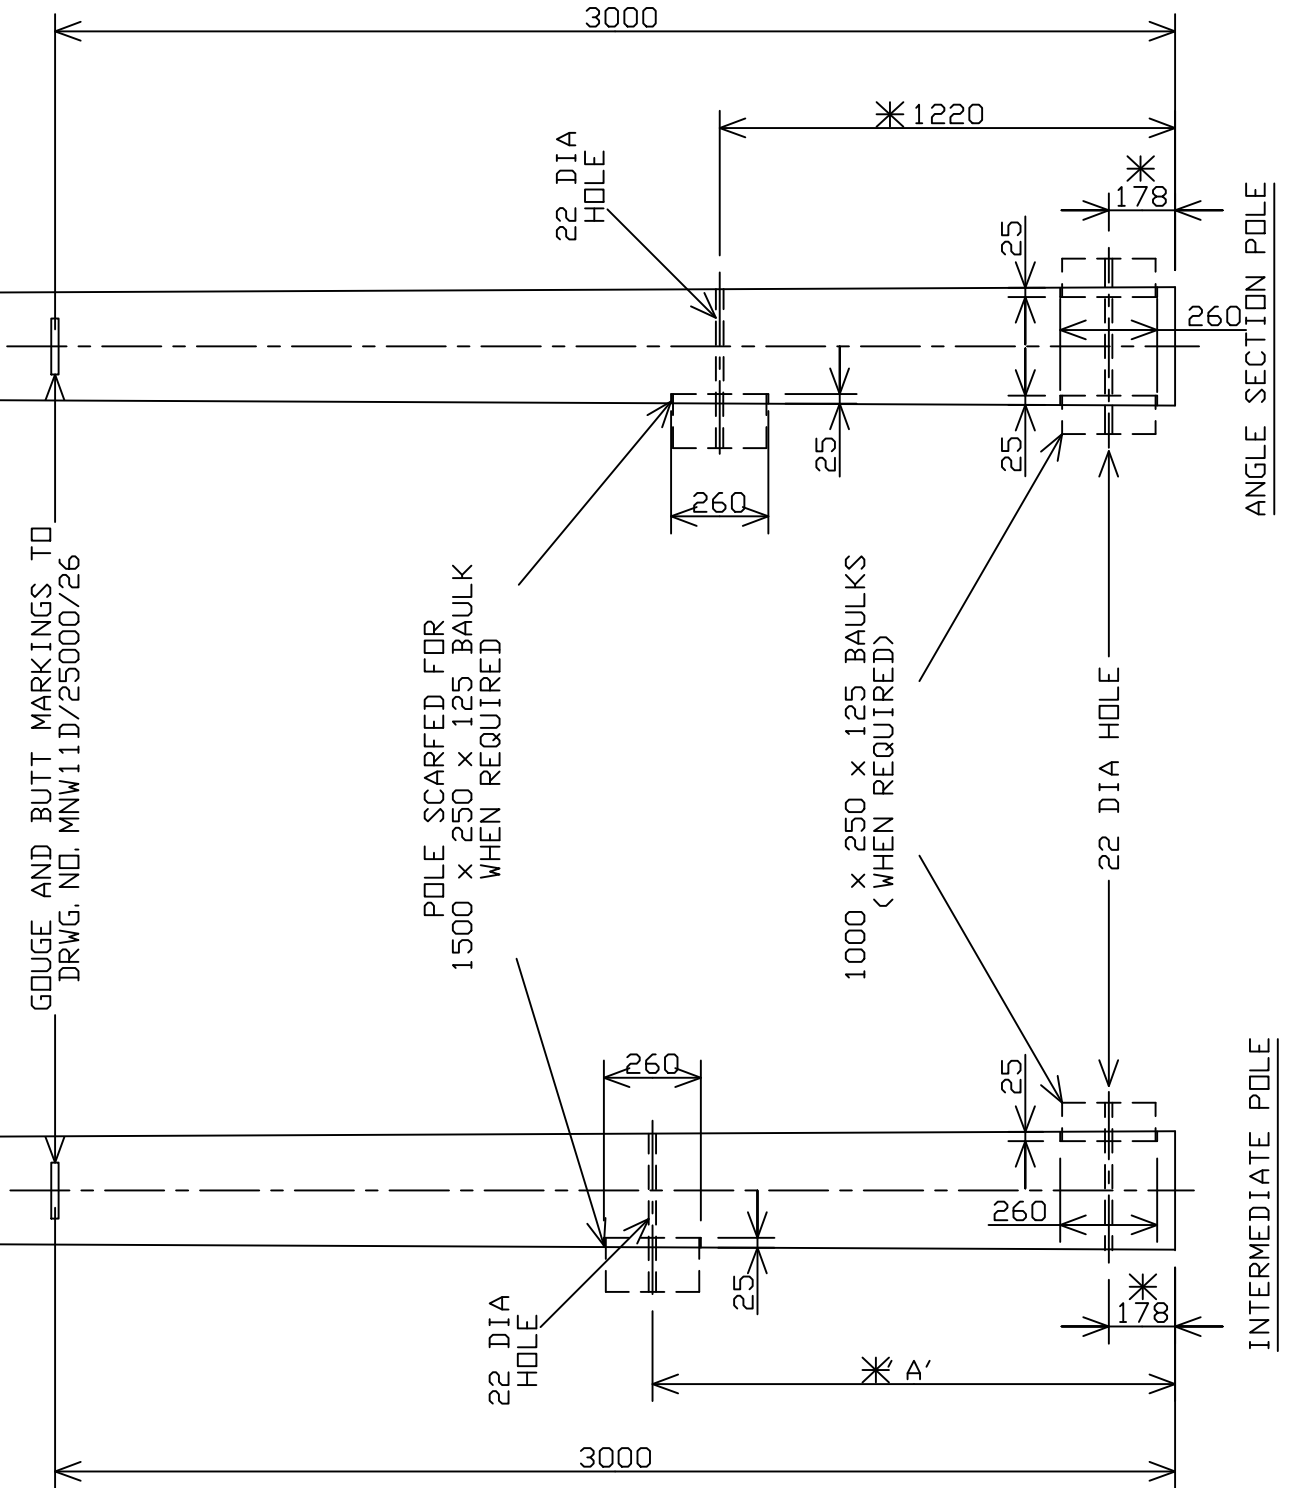

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED

THIS DRAWING SUPERSEDES MNWD/2015/W