



POLE SIZE TO BE IMPRESSED
ON POLE BUTT

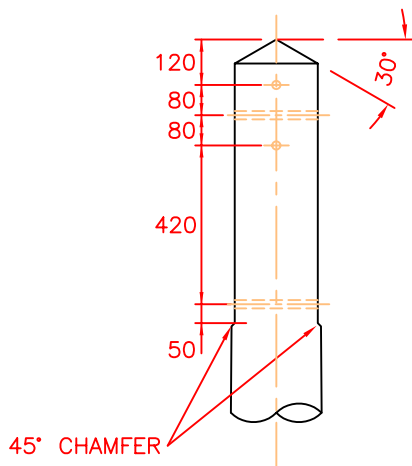

SCARFING TO BE CUT TO GIVE
A 50mm FACE ON BOTH FACES
OF POLE AND THE END
CHAMFERED OFF BEYOND
THE LENGTH SHOWN

POLE SCARFED ON BOTH SIDES
DRILLINGS 22mm DIA

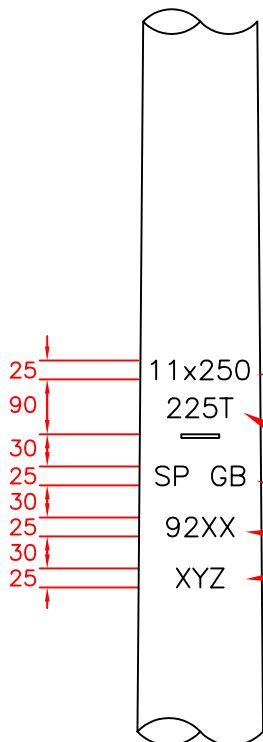

MARKING GENERALLY AS BS1990

1. LENGTH AND DIAMETER OR CLASS AT 1500mm
2. CHARACTERS TO BE GOUGED OR BRANDED
5mm WIDE, 3mm DEEP AND 25mm HIGH
AS A MINIMUM
3. POLE TOP DIAMETER
4. TIMBER SPECIES, COUNTRY OF ORIGIN
5. YEAR OF PRESERVATION AND CHARGE No.
6. INITIALS OF SUPPLIER

NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETRES, UNLESS
OTHERWISE SHOWN.
2. ALL POLE DRILLINGS ABOVE GROUND LEVEL
WHICH ARE NOT USED, MUST BE PLUGGED
WITH APPROVED WOOD POLE PLUGS

POLE LENGTH (m)	DIM 'A' (m)
8.5 - 11.0	1.3
11.5 - 14.0	1.1
15.0 - 17.0	0.7
18.0 - 24.0	0.5



System Design, Drawing Office, 3 Prenton Way, Prenton, CH43 3ET
Telephone 0151 6092491

Drawn TA	Date 11/10/06
Checked DJB	Date 12/10/06
Approved LC	Date 13/10/06

Title

33KV HEAVY CONSTRUCTION
SINGLE POLE MEMBER
DRILLING, SCARFING AND MARKING

Location OHL SPEC

Status

FOR ISSUE

Drg. No.

SP4009850

Rev.

2.0

© Copyright property of SP PowerSystems Ltd.

Scale

Size

A4