





10



POLE TO BE SCAFFED FOR A DISTANCE OF 200mm FROM THE POLE TOP TO GIVE A WIDTH OF 190mm BETWEEN FACES.



LENGTH OF POLE IN METRES	DIMENSION A IN mm	T IN mm	U IN mm	V IN mm	W IN mm	X IN mm	Y IN mm	Z IN mm
10	780	—	—	—	—	—	—	—
10-5	1280	640	—	—	—	—	—	—
11	1780	890	—	—	—	—	—	—
11-5	2280	1520	760	—	—	—	—	—
12	2780	1850	925	—	—	—	—	—
13	3780	2835	1890	945	—	—	—	—
14	4480	3580	2685	1790	895	—	—	—
15	5480	4550	3640	2730	1820	910	—	—
16	6480	5550	4625	3700	2775	1850	925	—
17	7480	6545	5610	4675	3740	2805	1870	935



DRILLINGS AND MARKINGS.


- ALL HOLES TO BE 22mm DIA. UNLESS OTHERWISE STATED.
- 75x6x6mm COUGE MARK 3000mm UP FROM BUTT ON INSIDE OF LEGS.
- BUTT TO BE SAWN OFF SQUARE TO THE AXIS OF THE POLE.
- POLE TO BE MARKED AS PER INSET.
- IT IS ESSENTIAL THAT THE DRILLINGS ARE DRILLED TO TEMPLATE AND ARE ACCURATE AND DEAD CENTRE.
- LEGS OF 'H' POLE TO BE CAREFULLY MATCHED.
- THE FOLLOWING INFORMATION TO BE IMPRESSED ON END GRAIN OF BUTT OF POLE:
 - LENGTH AND DIAMETER OF POLE.
 - POLE NUMBER IN ACCORDANCE WITH SCHEDULE.

NOTE: THE PERSONAL MARK OF THE POLE INSPECTOR WILL BE IMPRESSED ON THE BUTT.

1500mm FOR POLES UP TO AND INCLUDING 13m.

1800mm FOR POLES OVER 13m.

POLE TO BE SCAFFED TO GIVE A 100mm FACE.

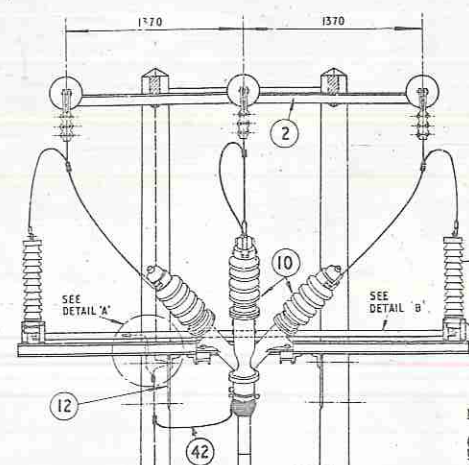


MOUNTING DETAILS FOR BROWN ROVERI TYP. W.G. 37 SURGE DIVERTER.

(TO BE MOUNTED DIAGONALLY AT 210mm C/P RES.) IN ORDER TO POSITION THE LINE AND EARTH TERMINALS. THE COMPLETE DIVERTER CAN BE TURNED BY FIRST LOOSENING THE HORIZONTAL CLAMP BOLTS.

NOTE: WHEN RE-TIGHTENING, CARE SHOULD BE TAKEN THAT THESE BOLTS ARE NOT OVER-TIGHTENED.

THE SAME MOUNTING STEELWORK AND EARTHING ARRANGEMENTS APPLY TO THE ALTERNATIVE SURGE DIVERTER - EMP TYPE DN 37.

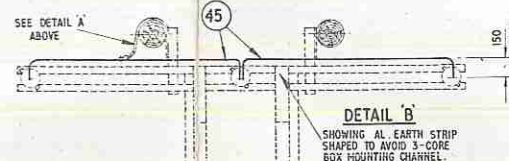

ADDITIONAL CLEAT CROSSARMS IF REQUIRED (SEE TABLE).


ANTI-CLIMBING BRACKET TO BE FITTED IN ACCORDANCE WITH STANDING ORDER ENG. 104 & AS DETAILED BELOW.

EARTHING NOTE: ALL STEELWORK SHALL BE BONDED TOGETHER AND EARTHED BY 0.1in OR 10mm² COPPER CONDUCTOR TO A 1500mm LONG GALVANISED STEEL EARTH ROD DRIVEN VERTICALLY AT THE FOOT OF THE POLE. (FOR CONNECTING THE SURGE DIVERTER ALUMINIUM EARTH STRIP TO THE COPPER EARTH WIRE SEE DETAIL 'A' ABOVE). THE TOP OF THE ROD SHALL BE 600mm BELOW THE SURFACE OF THE GROUND AND THE COPPER CONDUCTOR FROM IT TO A POINT ON THE POLE 3000mm ABOVE GROUND LEVEL SHALL BE PVC COVERED.

BONDING CONNECTIONS FOR THE EARTH WIRE SHALL BE MADE BETWEEN STEEL SURFACES AND NOT BETWEEN STEELWORK AND POLE.

2m. FOR POLES UP TO AND INCLUDING 13m.

2.3m. FOR POLES OVER 13m.

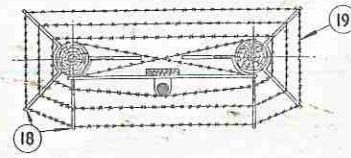

NOTE: THE CONNECTION BETWEEN THE EARTH ROD AND CONDUCTOR SHALL BE BY MEANS OF TWO BULL DOG GRIPS SPACED APPROXIMATELY 100mm APART. THE CONNECTION SHALL BE PROTECTED FROM CORROSION BY THE APPLICATION OF AT LEAST TWO LAYERS OF 'DENSO' TAPE. SEE ITEM (46) IN EQUIPMENT SCHEDULE.

ITEM No.	DESCRIPTION	DRG. No.
1	POLE	TO SPECIFICATION
2	CROSSARM	S.18634-B
3	10" (254mm) DISC INSULATOR	S.19042S
4	DEAD END CLAMP FOR 200sq. mm. A.C.S.R.	S.20207V
5	BALL ENDED HOOK	S.19003V
6	SOCKET TONGUE	S.18040X
8	SUPPORTING STEELWORK FOR SURGE DIVERTER AND 33kV 3-CORE TERMINAL BOX	S.18222J
9	SUPPORTING STEELWORK FOR 33kV 3-CORE TERMINAL BOX	S.18157V
10	33kV 3-CORE TERMINAL BOX	—
11	SURGE DIVERTER	18050F
12	GUSSET PLATE	S.19221C
13	BACKBOARD AND CLEAT CROSSARM	S.18532J
14	SINGLE WAY CABLE CLEAT	S.18419V
15	DANGER NOTICE	S.19221V
16	NUMBER / LETTER PLATE	S.18532J
17	PHASE IDENTIFICATION PLATES	S.19231V-33
18	ANTI-CLIMBING BRACKET	S.18914R
19	BARBED WIRE	S.18977X
20	BRACE BLOCK 2.00x200x100mm	S.18059J
21	CABLE GUARD 3100mm LONG	S.18933F
22	WOOD BACKBOARD 4200x750x50mm	S.180540
23	POLE TOP MAKE OFF	S.18426E
24	LINE SPLICE	S.18432C
25	STAY WIRE	S.18984F
26	GUY GRIP DEAD END	S.18427H
27	22mm DIA. ADJUSTABLE STAY ROD	S.18931K
28	STAY BLOCK	S.18055G
29	CURVED 3/4" DIA. TOP M20 DIA. BOLTS	S.18110R
30	PVC EARTH WIRE CLIP 2400mm LONG	S.18942E
31	BULL DOG GRIP (7 No. RE2 D.)	S.19218Q
32	COUPLING	S.18955Y
33	1500mm LONG EXTENSIBLE EARTH ROD	S.18955Y
34	DRIVING POINT	S.18955Y
35	COPPER CRIMPIT (BICC BURNBY - YC26 025)	S.18207X
36	CABLE CRIMPIT (" " - YPC33R 33)	S.18215N
37	ALUMINIUM LUG (" " - YCA33SR 33)	S.18215N
38	ALUMINIUM LUG (" " - YCA279A)	S.18215N
39	BI-METAL LUG	S.18215N
40	BI-METAL STRAIGHT (BOWTHORPE DN 9/100-1)	S.18215N
41	RECOVERED 0.1in (17/136) H.D. BARE COPPER	S.18215N
42	70mm ² (119/214) S.D. BARE ANNEALED COPPER	S.18215N
43	70mm ² (119/214) P.V.C. COVERED ANNEALED COPPER	S.18215N
44	100mm ² (174/351) BARE ALUMINIUM	S.18215N
45	ALUMINIUM STRIP (40x6mm ALLOY ELEM. TO BS 2836)	S.18215N
46	'DENSO' TAPE 50mm WIDE	S.18215N
47	ADAPTOR PLATE FOR BI-METAL LUG	—

A 31.78 REDRAWN TO METRIC DIMENSIONS - DRG. No. WAS 5/128.

eastern electricity

CHIEF ENGINEER'S DEPARTMENT

33kV. TERMINAL POLE 3-CORE OUTDOOR TERMINAL BOX ARRANGEMENT

Scale 1:20

5/B1008