


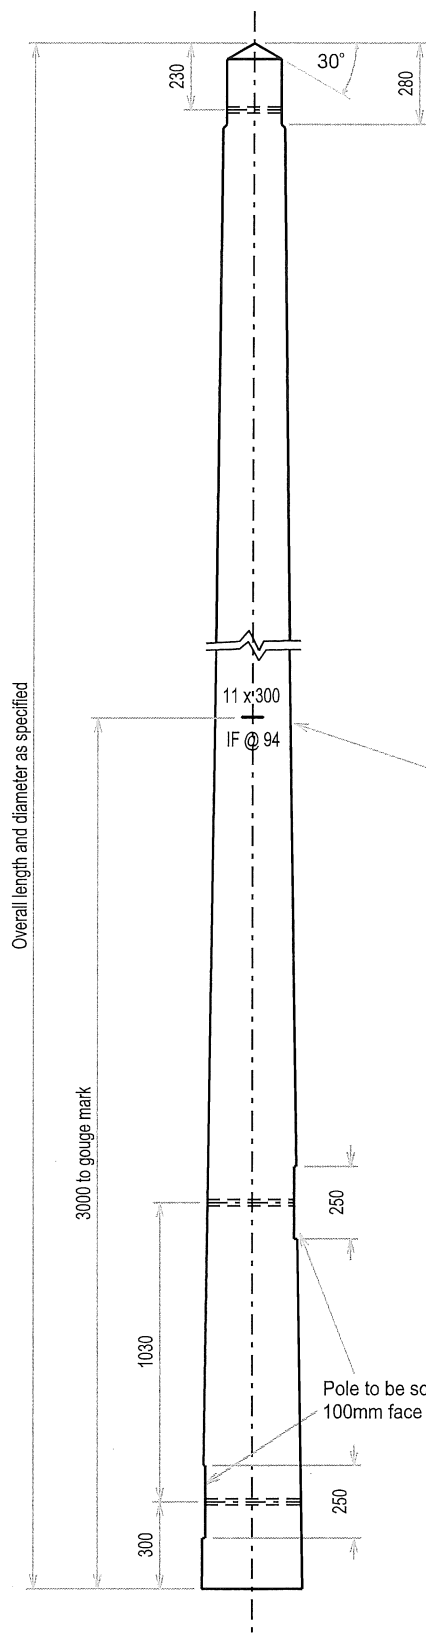

Pole to be scarfed for a distance of 280mm from the pole top to give a width of 190mm between faces

DRILLINGS AND MARKINGS

- I. All holes shall be 22mm dia. unless otherwise stated
- II. 75 x 6 x 6mm gouge mark 3000mm up from butt on inside of legs
- III. Butt to be sawn-off square to the axis of the pole
- IV. Pole to be marked as shown
- V. It is essential that the drillings are drilled to template, are accurate and dead centre
- VI. Legs of 'H' poles to be carefully matched
- VII. The following information to be impressed on the end grain of butt of pole:
 - (a) Length and diameter of pole
 - (b) Pole number in accordance with schedule

NOTE: The personal mark of the pole inspector will be impressed on the butt

TYPICAL MARKINGS FOR WOOD POLES

- 11 Length of pole in metres
 300 Diameter of pole in millimetres at 1500mm from the butt
 IF Species code
 94 Year of impregnation
 @ Name or mark of creosoting firm
 Text to be 25mm high

33kV Single Circuit 'H' Through Pole

Based on EPN drawing 4/B1001

© UK Power Networks 2014

DRN. RDH 17.12.13	SPECIFICATION DRAWING NUMBER	ISSUE
CKD.	EDS 01-9000.104	1
APP.		