


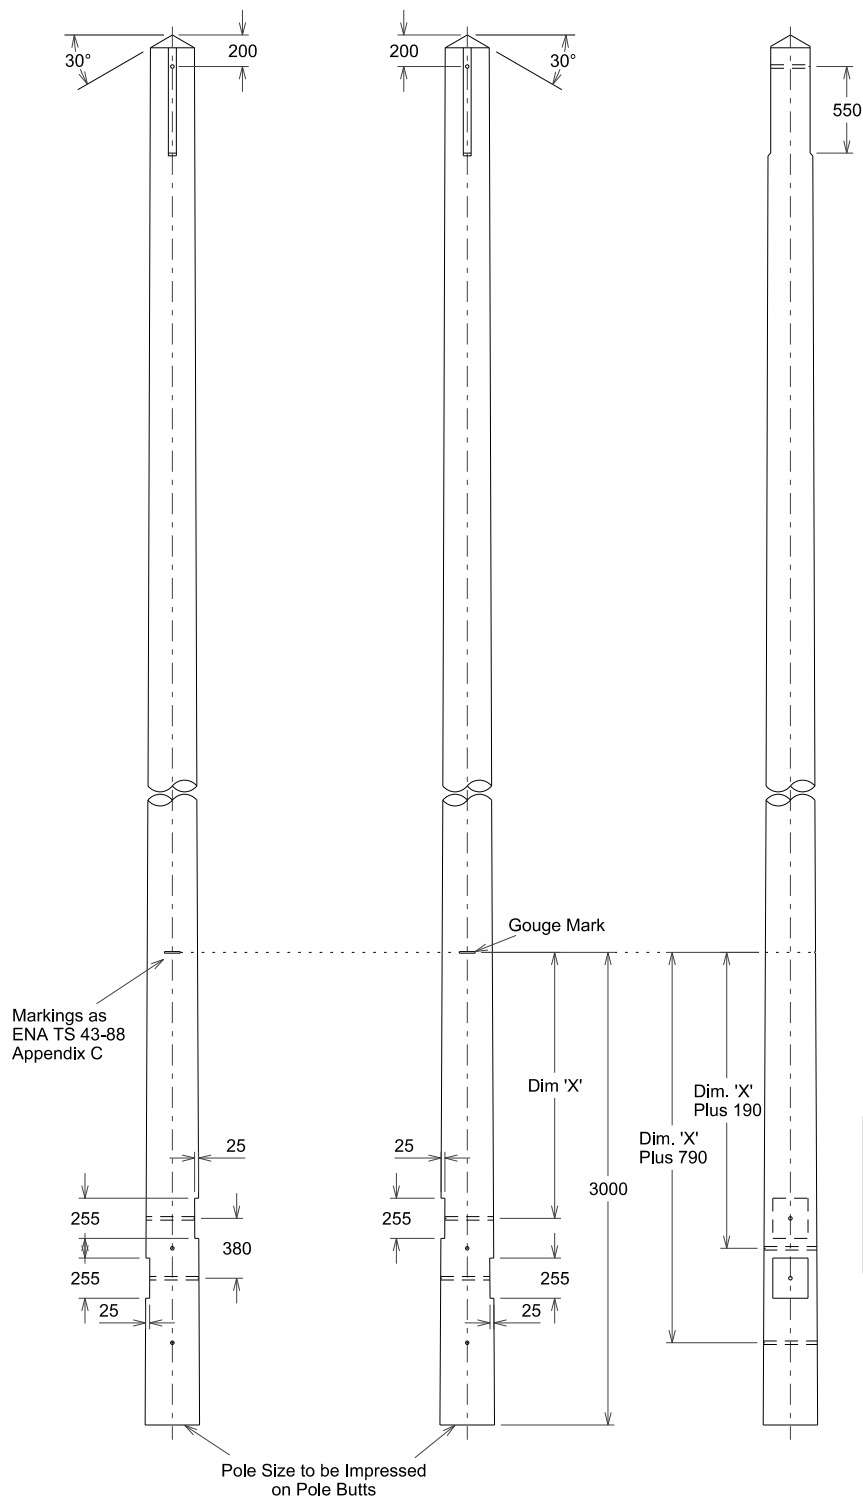

NOTES

1. Class of pole to be 'MEDIUM', 'STOUT' or 'EXTRA STOUT' as specified.
2. 'MEDIUM' class poles to have minimum dia. of 175mm at top.
'STOUT' class poles to have minimum dia. of 210mm at top.
3. Poles to be matched.
4. All holes to be 22mm dia. drilled at right angles to vertical centre line of pole. All drilling and cutting to be done strictly to template prior to preservative treatment.
5. Pole butt to be cut at right angles to axis of pole.
6. Pole to be notched and drilled for duplicate 250 x 125 baulks.

POLE LENGTH (m)	DIM. 'X' (mm)
8.5 - 12 Inclusive	1700
13 - 15 Inclusive	1400
16 - 18 Inclusive	1100
20 -	500

All dimensions in millimetres

'H' Pole Fabrication

(Based on ENA TS 43-40, Drg. 434002)

© UK Power Networks 2020

DRN. March 2010	DRAWING NUMBER	ISSUE
CKD. A. Archer Feb. 2018	ETS 01-0200.102	2
APP. A. Archer Feb. 2018		