


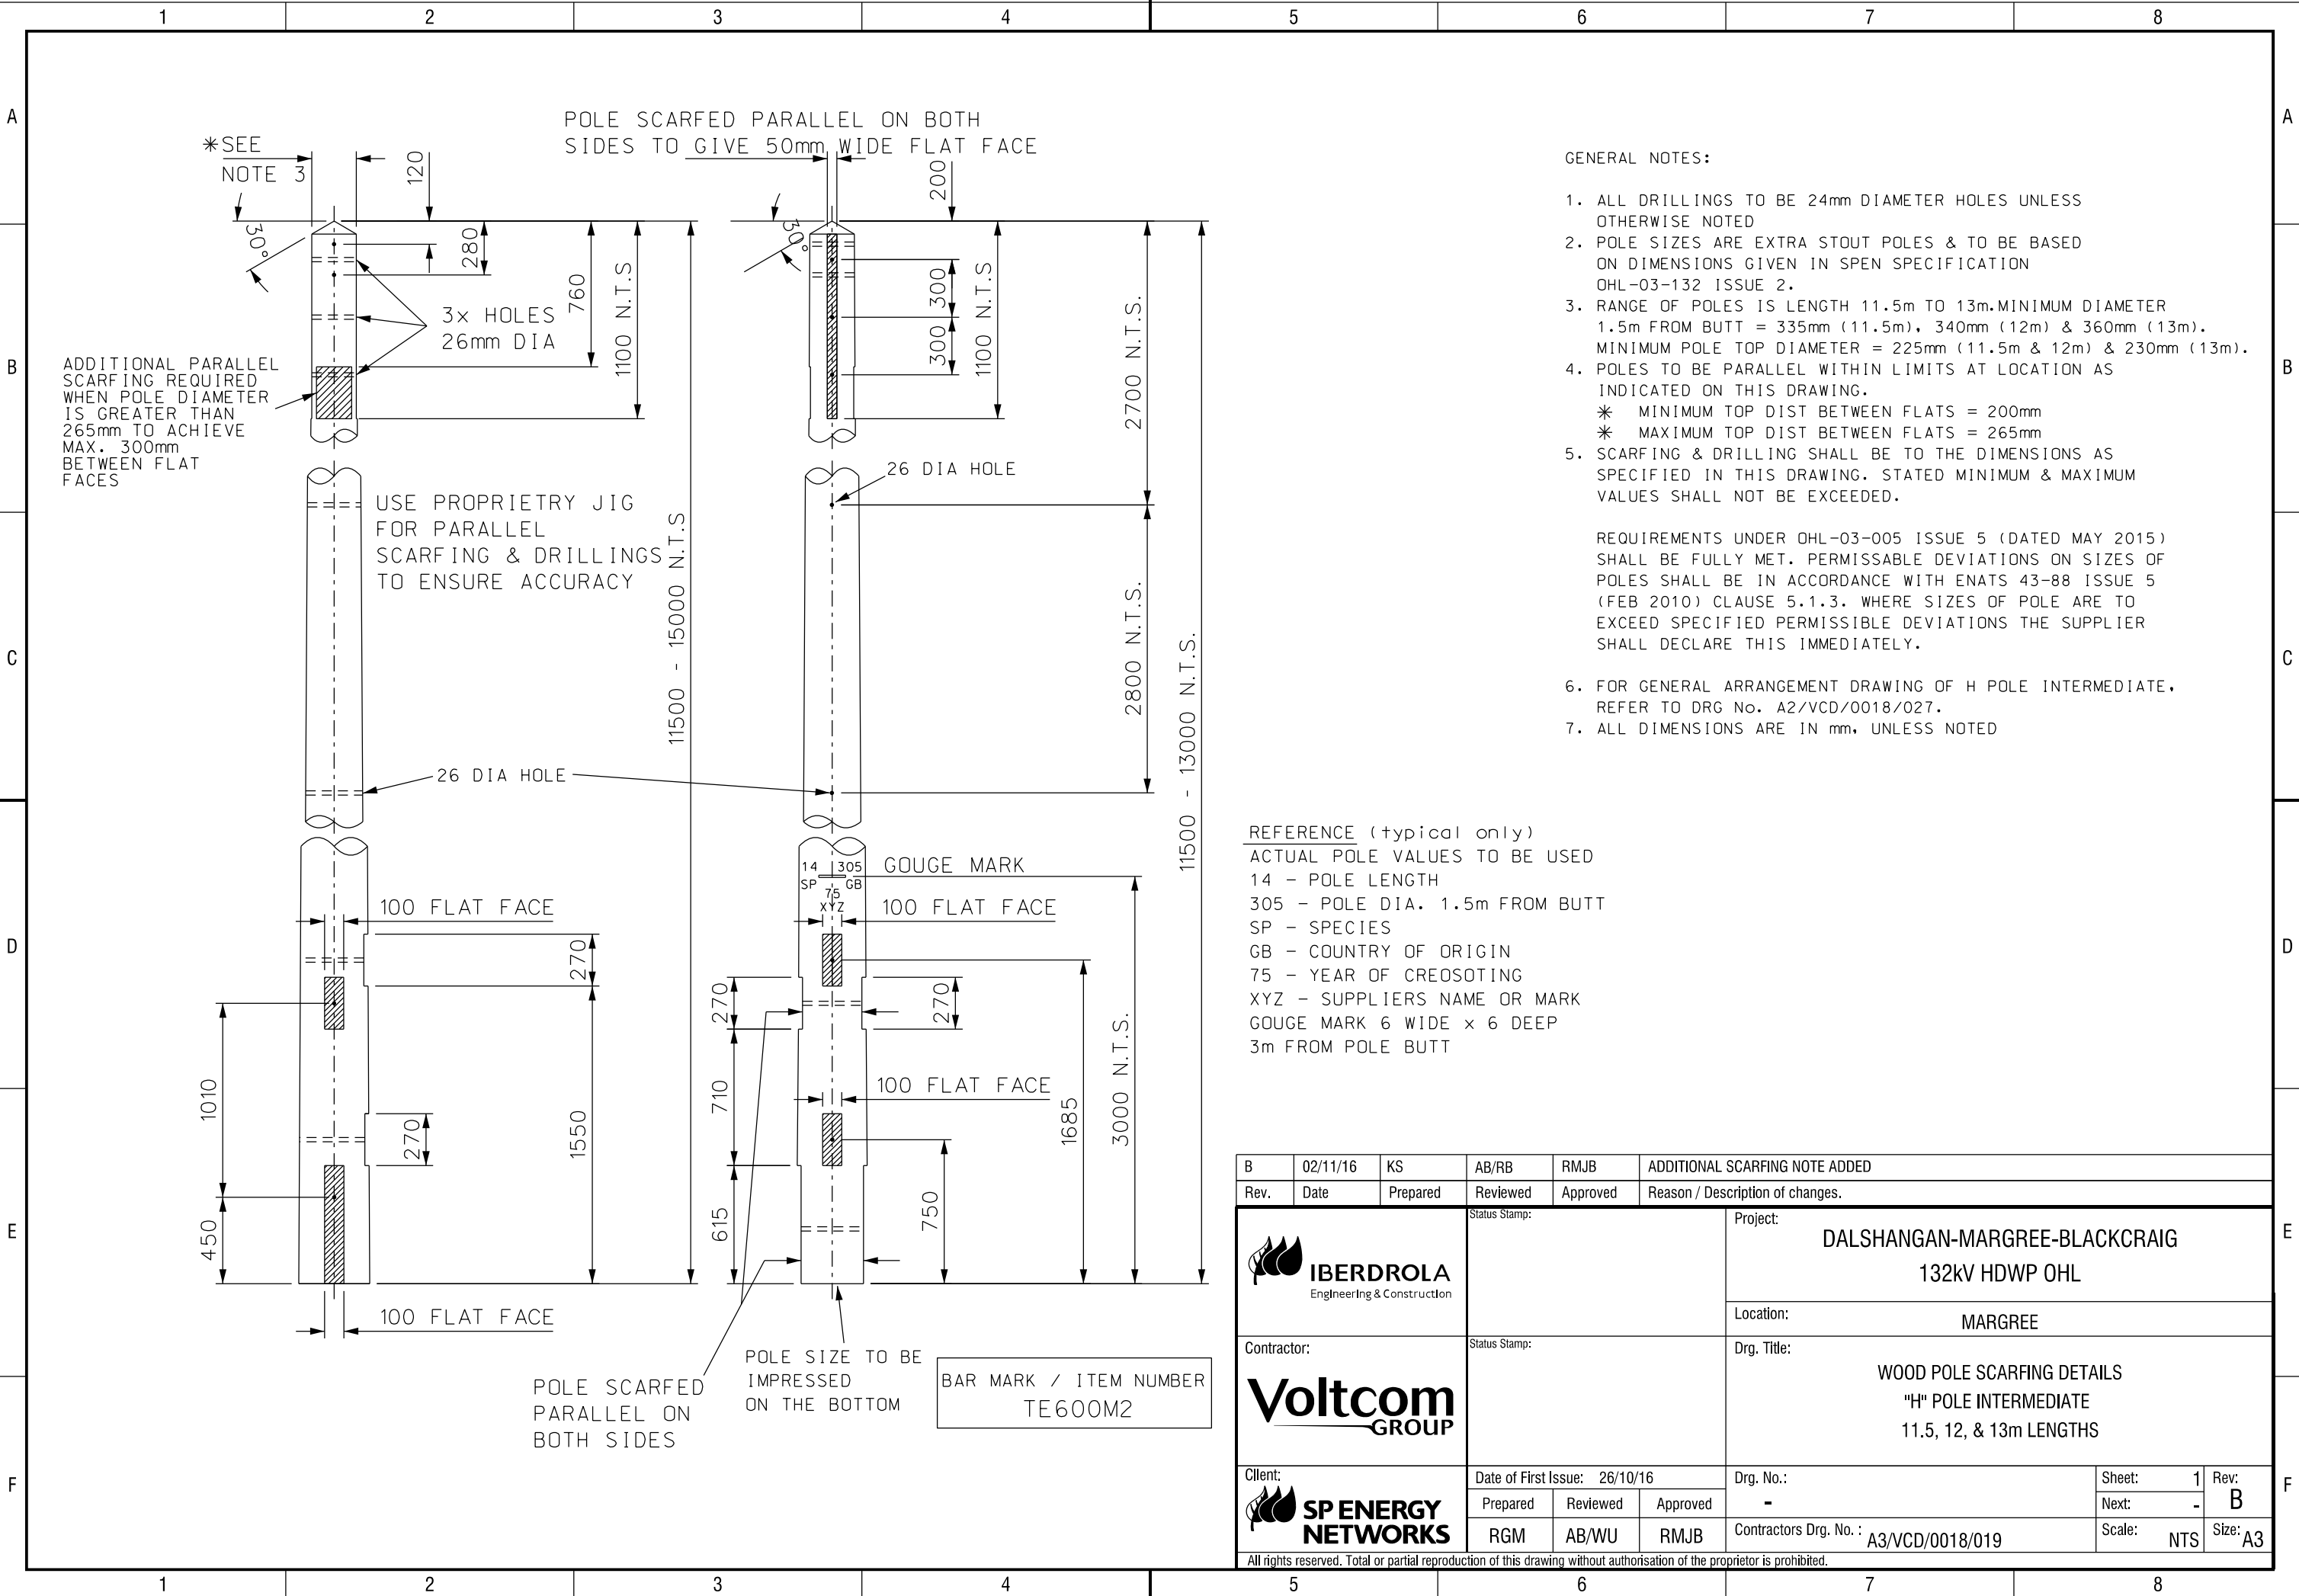

GENERAL NOTES:

1. ALL DRILLINGS TO BE 24mm DIAMETER HOLES UNLESS OTHERWISE NOTED
 2. POLE SIZES ARE EXTRA STOUT POLES & TO BE BASED ON DIMENSIONS GIVEN IN SPEN SPECIFICATION OHL-03-132 ISSUE 2.
 3. RANGE OF POLES IS LENGTH 11.5m TO 13m. MINIMUM DIAMETER 1.5m FROM BUTT = 335mm (11.5m), 340mm (12m) & 360mm (13m). MINIMUM POLE TOP DIAMETER = 225mm (11.5m & 12m) & 230mm (13m).
 4. POLES TO BE PARALLEL WITHIN LIMITS AT LOCATION AS INDICATED ON THIS DRAWING.
 - * MINIMUM TOP DIST BETWEEN FLATS = 200mm
 - * MAXIMUM TOP DIST BETWEEN FLATS = 265mm
 5. SCARFING & DRILLING SHALL BE TO THE DIMENSIONS AS SPECIFIED IN THIS DRAWING. STATED MINIMUM & MAXIMUM VALUES SHALL NOT BE EXCEEDED.
- REQUIREMENTS UNDER OHL-03-005 ISSUE 5 (DATED MAY 2015) SHALL BE FULLY MET. PERMISSABLE DEVIATIONS ON SIZES OF POLES SHALL BE IN ACCORDANCE WITH ENATS 43-88 ISSUE 5 (FEB 2010) CLAUSE 5.1.3. WHERE SIZES OF POLE ARE TO EXCEED SPECIFIED PERMISSIBLE DEVIATIONS THE SUPPLIER SHALL DECLARE THIS IMMEDIATELY.
6. FOR GENERAL ARRANGEMENT DRAWING OF H POLE INTERMEDIATE, REFER TO DRG No. A2/VCD/0018/027.
 7. ALL DIMENSIONS ARE IN mm, UNLESS NOTED

REFERENCE (typical only)
ACTUAL POLE VALUES TO BE USED
14 - POLE LENGTH
305 - POLE DIA. 1.5m FROM BUTT
SP - SPECIES
GB - COUNTRY OF ORIGIN
75 - YEAR OF CREOSOTING
XYZ - SUPPLIERS NAME OR MARK
GOUGE MARK 6 WIDE x 6 DEEP
3m FROM POLE BUTT

B	02/11/16	KS	AB/RB	RMJB	ADDITIONAL SCARFING NOTE ADDED			
Rev.	Date	Prepared	Reviewed	Approved	Reason / Description of changes.			
			Status Stamp:		Project: DALSHANGAN-MARGREE-BLACKCRAIG 132KV HDWP OHL			
					Location: MARGREE			
			Status Stamp:		Drg. Title: WOOD POLE SCARFING DETAILS "H" POLE INTERMEDIATE 11.5, 12, & 13m LENGTHS			
			Date of First Issue: 26/10/16		Drg. No.:		Sheet: 1	Rev: B
			Prepared	Reviewed	Approved	-	Next: -	
			RGM	AB/WU	RMJB	Contractors Drg. No. : A3/VCD/0018/019	Scale: NTS	Size: A3

All rights reserved. Total or partial reproduction of this drawing without authorisation of the proprietor is prohibited.