

Med 155 Min 205 Max
Stout 210 Min 230 Max

SCARF TO EXACT
DIMENSION - PROVIDE
PARALLEL SURFACES.
CHAMFERED OFF AT ENDS

H Poles to be matched
All Holes Drilled 22mm dia.
Scarving to be aligned
centrally and drillings aligned
and within tolerance either
side of the pole.

Reference Details as Per Appendix B


As an alternative to etched marking at the gouge
mark an inset disc / plate, containing the same
information can be used.

The inset must be duplicated at a height of 6m
from the butt with both insets placed in line with
the pole top drilling if a metallic inset disc is used.

The inset must be legible for the life expectancy of
the pole

GOUGE MARK
APPROX 6mm WIDE
AND 6mm DEEP

8.5 S
I.F. 76
x 72

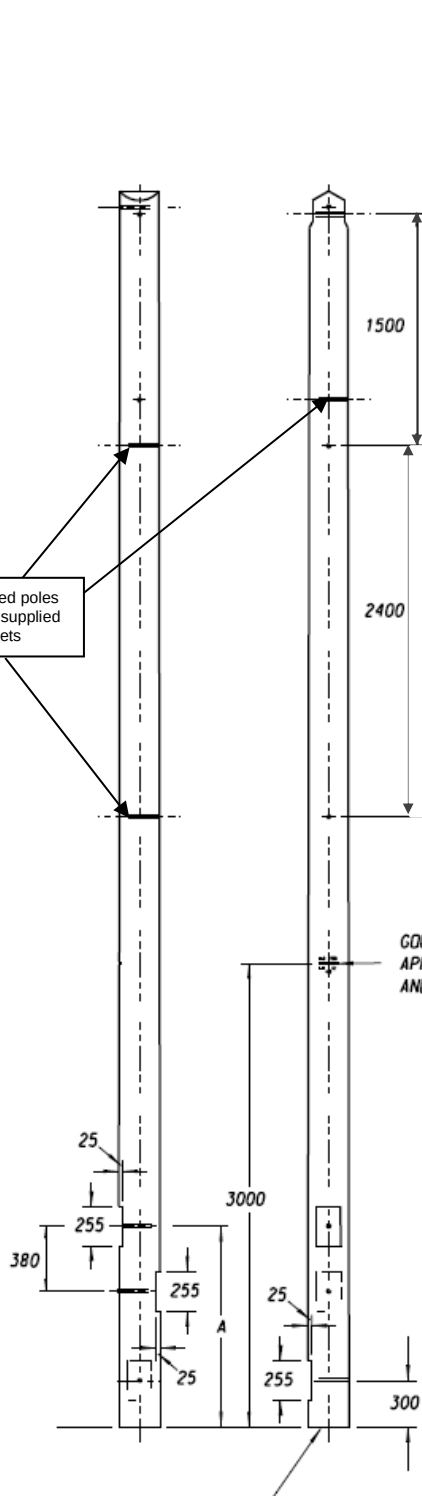

Pole length, grade and NGED Figure
No., item code and mm/yy to be
impressed / marked clearly on pole
butt together with inspector's brand

LENGTH OF POLE	DIMENSION 'A'
8.5m - 14m	1.3m
15m - 20m	1.6m

ALL DIMENSIONS IN MILLIMETRES
UNLESS OTHERWISE SHOWN.

OH4T Fig 2 - H Pole Drilling, scarving & Marking