


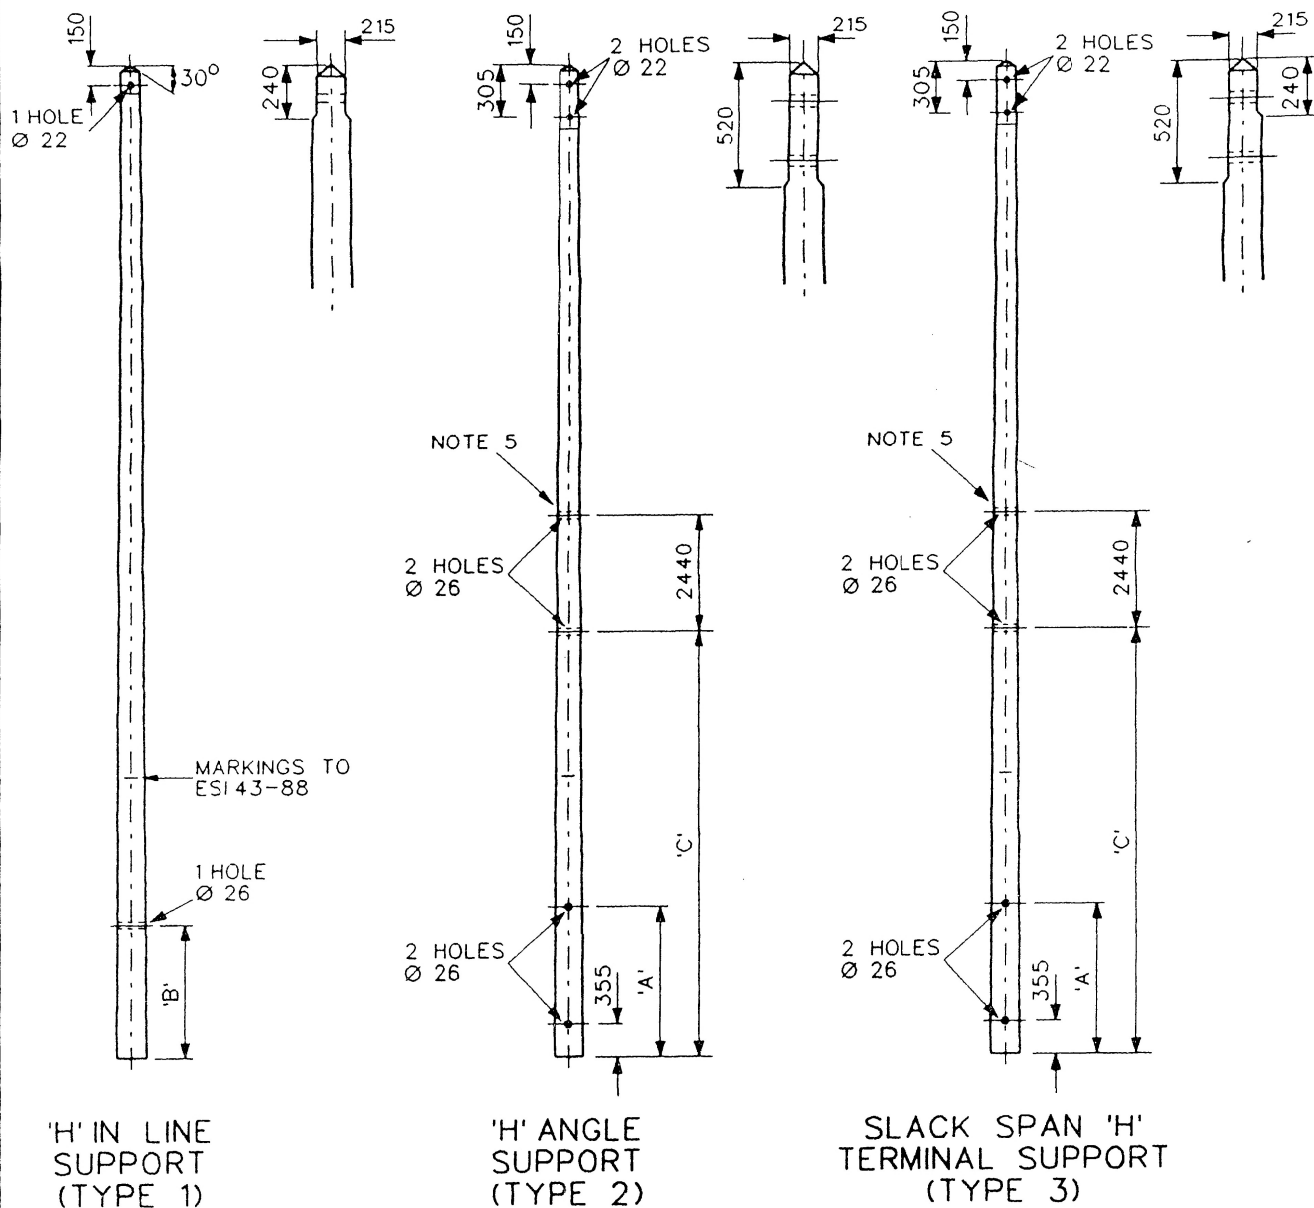

NOTES

- 1 POLES TO BE 'STOUT CLASS' TO BS 1990, CREOSOTED TO BS913 BY RUEPING PROCESS, AFTER FABRICATION
- 2 POLES TO BE MATCHED FOR H STRUCTURES, EACH PAIR OF POLES TO BE MARKED WITH IDENTICAL PAIRING NUMBERS
- 3 MINIMUM POLE TOP DIAMETER 205mm FOR INTERMEDIATES
- 4 ALL HOLES DRILLED AT RIGHT ANGLES TO VERTICAL CENTRE LINE OF POLE
- 5 1 ADDITIONAL HOLE AT 2044 INTERVAL FOR POLES OVER 14m
- 6 ANGLE AND TERMINAL POLES TO HAVE A POLE TOP DIAMETER NOT LESS THAN 20mm ABOVE THE MINIMUM SPECIFIED IN BS 1990 TABLE 3

DIMENSIONS IN MILLIMETRES

POLE LENGTH (m)	DIM 'A' (m)	DIM 'B' (m)	DIM 'C' (m)
UP TO 11.5	1.2	1.4	6.0
12.0 TO 13.0	1.4	1.5	6.0
14.0	1.5	1.7	6.0
15.0	1.5	1.7	6.0
16.0 & 17.0	1.7	1.8	7.0
18.0	1.8	2.0	8.0
20.0	1.8	2.0	10.0
22.0	1.8	2.0	12.0

drawn	BT	POLE FABRICATION INTERMEDIATE, ANGLE AND SLACK SPAN TERMINAL CE/C/37M		
traced	JEC			
checked	JMP			
approved	DVK			
revision	A	date 31-8-90	original scale	Y204L0601

