

A0 ENGINEERING PROTOTYPE / NOT RELEASED FOR FABRICATION

HassleFree FF-1 | Low-speed controls + supply supervisor

01 / HALF PRESS

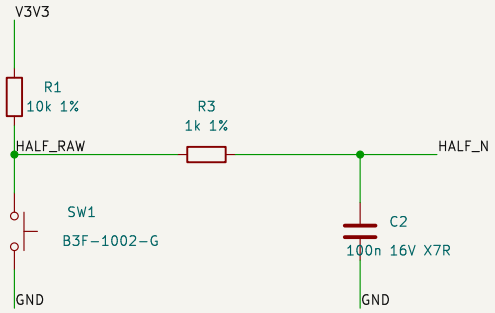


02 / FULL PRESS

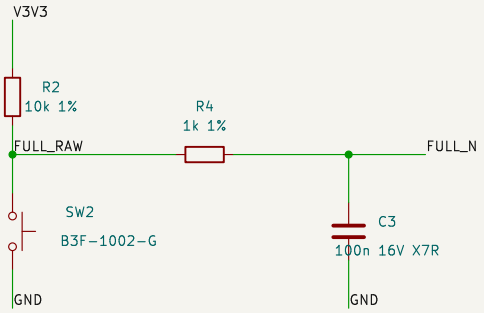


03 / HOST HEADER

External regulated 3.3 V only. No 5 V.

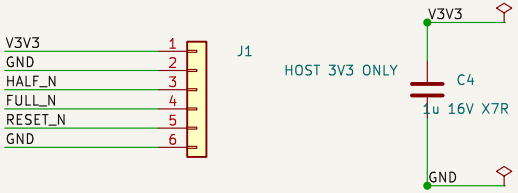

04 / 3.3 V BROWNOUT FLAG

2.93 V nominal; 200 ms nominal release

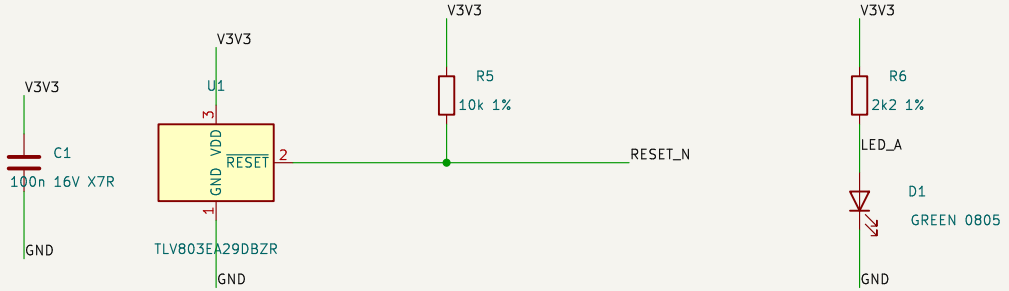

H1 M2.5 NPTH

H2 M2.5 NPTH

H3 M2.5 NPTH

H4 M2.5 NPTH

REQUIREMENTS

- Schmitt-capable 3.3 V host inputs; software debounce >= 10 ms.
- RESET_N is a local supply flag, not a validated Zynq POR circuit.
- Separate bench buttons emulate half/full press, not a two-stage shutter.
- No sensor connection, no SLVS-EC, no battery path or ESD qualification.

Prototype only; no sensor or high-speed interface

HassleFree FF-1

Sheet: /

File: FF1_Control_A0.kicad_sch

Title: FF1 Control and Supply Supervisor

Size: A4	Date: 2026-11-05	**Rev: A0**
KiCad E.D.A. 9.0.2		Id: 1/1