


---

```
clc;
clear;
close all;
% Parameters
N = 1000;
bits = randi([0 1],N,1);
% BPSK Modulation
tx = 2*bits - 1;
% Multipath Fading Channel

h = [1 0.5 0.3];
fade = filter(h,1,tx);
% Add AWGN
rx = awgn(fade,10, 'measured');
% Detection
bits_rx = rx > 0;
% BER Calculation
[~, BER] = biterr(bits,bits_rx);
fprintf('BER = %f\n',BER);
% Plots
figure;
subplot(3,1,1)
plot(tx)
title('Transmitted BPSK Signal')
grid on
subplot(3,1,2)
plot(rx)
title('Received Signal (Multipath + AWGN)')
grid on
subplot(3,1,3)
stem(bits(1:50), 'b')
hold on
stem(bits_rx(1:50), 'r')
title(['BER = ' num2str(BER)])
legend('Original', 'Detected')
grid on

BER = 0.085000
```

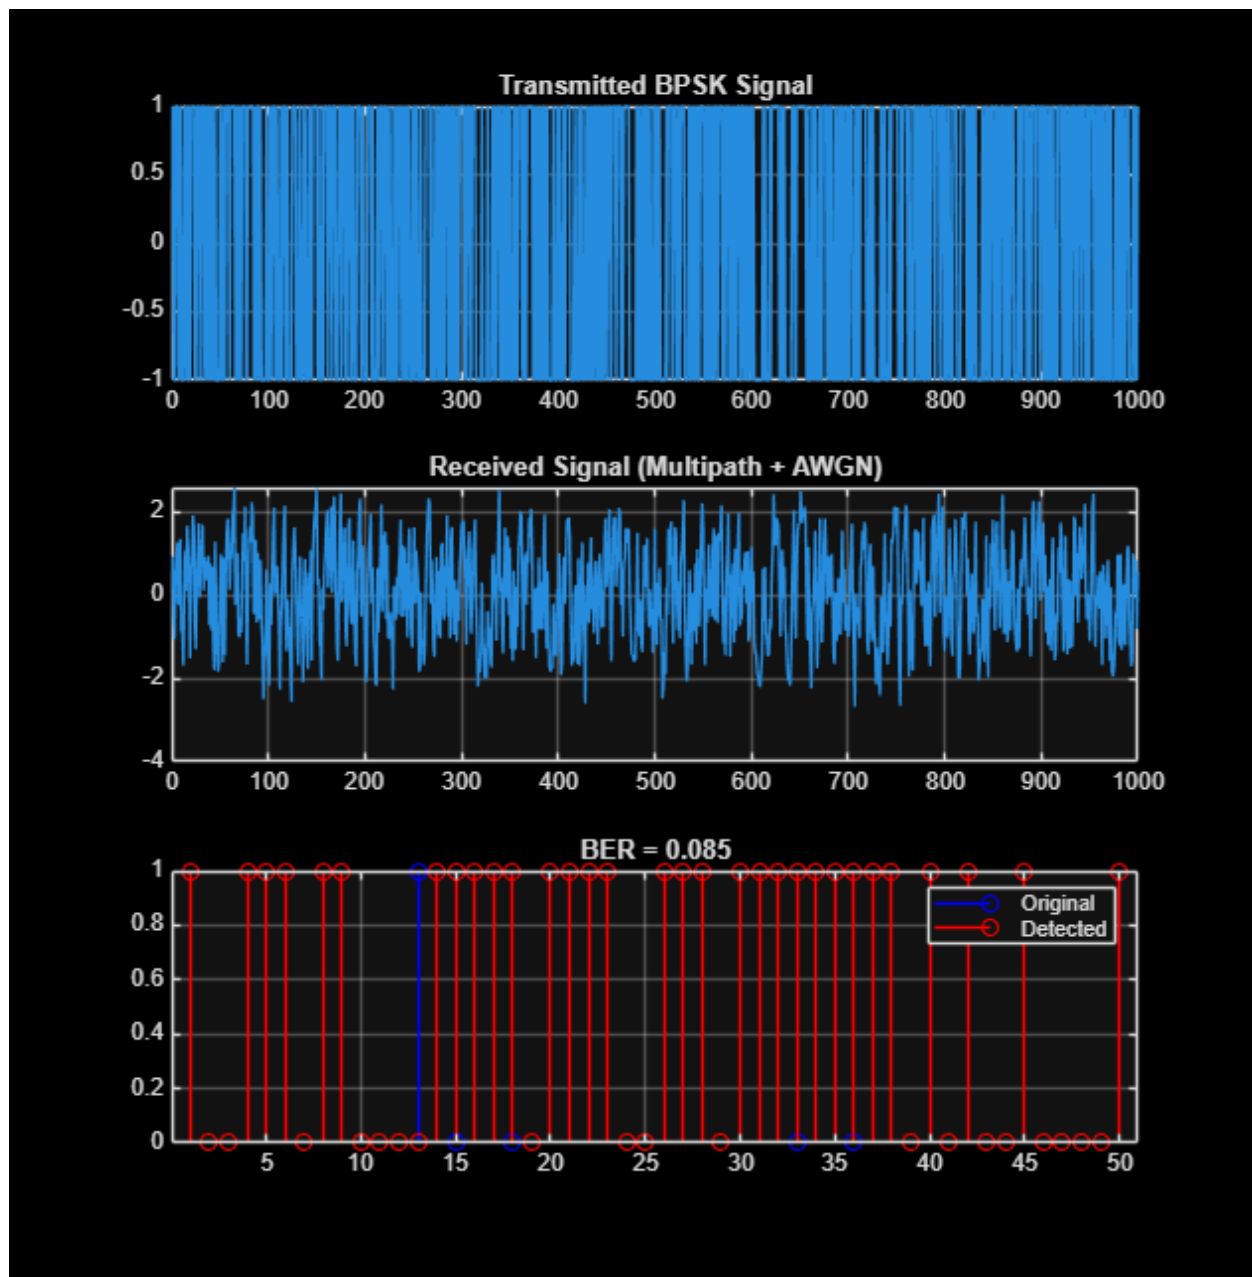

*Published with MATLAB® R2026b*