

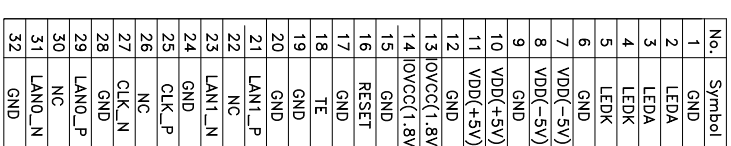



No.	Symbol
1	GND
2	LEDA
3	LEDA
4	LEDA
5	LEDA
6	GND
7	VDD(-5V)
8	VDD(-5V)
9	GND
10	VDD(+5V)
11	VDD(+5V)
12	GND
13	IOVCC(1.8V)
14	IOVCC(1.8V)
15	GND
16	RESET
17	GND
18	TE
19	GND
20	GND
21	LANT_P
22	NC
23	LANT_N
24	GND
25	CLK_P
26	NC
27	CLK_N
28	GND
29	LANT_P
30	NC
31	LANT_N
32	GND

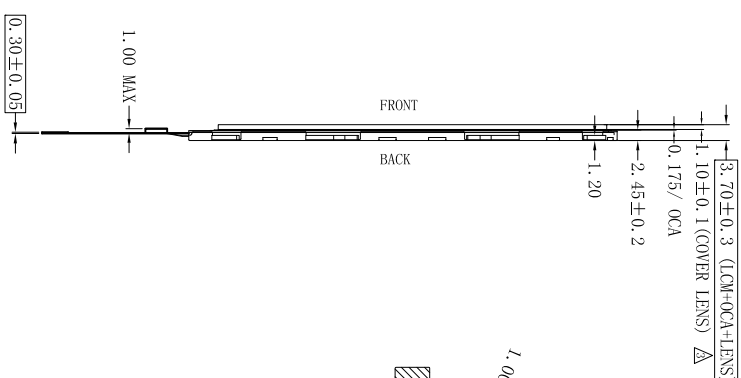

1. DISPLAY TYPE:	3.4" TFT_LCD/TRANSMISSIVE
2. OPERATING TEMPERATURE:	-20°C~70°C
3. STORAGE TEMPERATURE:	-30°C~80°C
4. VIEWING ANGLE:	ALL
5. BACKLIGHT BRIGHTNESS:	360CD/M2
6. DRIVER:	ILI9881C
7. RESOLUTION:	800(RGB)X800
8. CONNECTOR:	FH19SC-32S-0.5SH
9. UNMARK TOLERANCES:	±0.2MM

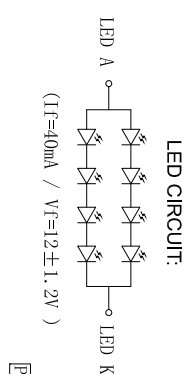

 MACLIGHT DISPLAY CO., LIMITED

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER : MLT034S32-1		SHEET: 1 OF 1
0.30	MM				
DWN:					
CHK:					
APP:			DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: