HONGKONG KOON TECHNOLOGY LTD

6th/f 268th factory Nanchang Ind. park gushu boan SZ China
Tel: 0086755 29790158 / 29127300   Fax:0086755 29790278
Email:jenny@koontech.com   www.koontech.com

Wireless Hand-Free Emergency call telephone
Model: GSM KNEM-21

Main Features:

1. Matell body, solid and temperature bearable
2. Handset free, loudspeaker,
3. Heavy duty Vandal resistant buttons.
4. With or without keypad optional
5. Lightning protection standard to ITU-T K21
6. Waterproof grade about IP55
7. Body with grounding connection protection
8. Support hotline call, self stop if the other side hang up.
9. Built-in loud speaker, noise canceling microphone
10. Lighting will flash when there is a incoming call
11. AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional
12. The design is super thin and smart. Embed style and hanging style can be chosen.
13. Time out function optional
14. Colours: RED + Stainless steel , If the qty over 100pcs can be To customer specification
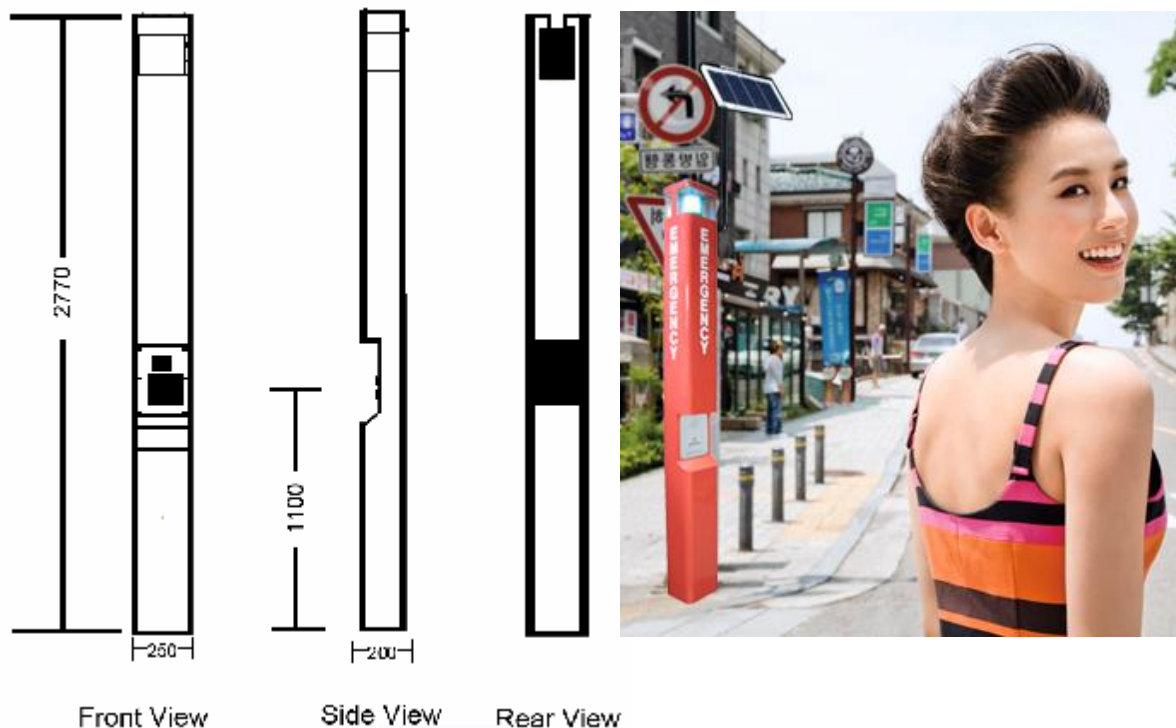
Applications:

As Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities….A good ideal telephone for use in wet or corrosive atmospheres

![KOON logo] **HONGKONG KOON TECHNOLOGY LTD**
6th/f 268th factory Nanchang Ind. park gushu boan SZ China
Tel: 0086755 29790158 / 29127300   Fax:0086755 29790278
Email:jenny@koontech.com   www.koontech.com

Specification:

1. **Network Interface:** GSM Frequency ：850/900/1800/1900MHZ
2. **Ringing:** Through internal Speaker/ringer
3. **Power Supply:** Re-chargeable Battery powered: 9V/14Ah,   Solar back-up: 12V/30W
4. **Time out:** selectable 0-20 minutes
5. **Temperature:** -20℃~ +60℃emp
6. **Relative Humidity:** up to 90%
7. **Built-in battery Standby:** 21days
8. **Built-in battery talking time:** 21 hours

Telephone layout

2770

1100

250

200

Front View   Side View   Rear View

Solar panel over 600mm high

1.5 Certification:

EMC: EN50121 (Railway application- Electromagnetic Compatibility)
        EN55022: emissions   EN55024: immunity
Ingress Protection: GB4208-93 IP67
FCC
ITU-T Recommendations K21
Telephone Unit size: 2770*250*200mm Unit Net weight: 160kg
1pcs in each inner CTN box, size: 350X530X4600   G.W: 170kg
20GP: 32PCS   40GP: 65PCS   40HQ: 80PCS