

### HONGKONG KOON TECHNOLOGY LTD

6<sup>th</sup>/f 268<sup>th</sup> factory Nanchang Ind. park gushu boan SZ China Tel: 0086755 29790158 / 29127300 Fax:0086755 29790278 Email:jenny@koontech.com www.koontech.com

# Wireless Hand-Free Emergency call telephone

**Model: GSM KNEM-26** 





### Main Features:

- 1. Matell body, solid and temperature bearable
- 2. Handset free, loudspeaker,
- 3. Heavy duty Vandal resistant buttons.
- 4. With or without keypad optional
- 5. Lightning protection standard to ITU-T K21
- 6. Waterproof grade about IP55
- 7. Body with grounding connection protection
- 8. Support hotline call, self stop if the other side hang up.
- 9. Built-in loud speaker, noise canceling microphone
- 10. Lighting will flash when there is a incoming call
- 11. AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional
- 12. The design is super thin and smart. Embed style and hanging style can be chosen.
- 13. Time out function optional
- 14. Colours: RED + Stainless steel, If the qty over 100pcs can be To customer specification

#### **Applications:**

As Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities....A good ideal telephone for use in wet or corrosive atmospheres





### HONGKONG KOON TECHNOLOGY LTD

6<sup>th</sup>/f 268<sup>th</sup> factory Nanchang Ind. park gushu boan SZ China Tel: 0086755 29790158 / 29127300 Fax:0086755 29790278 Email:jenny@koontech.com www.koontech.com

## **Specification:**

1. **Network Interface:** GSM Frequency: 850/900/1800/1900MHZ

2. Ringing: Through internal Speaker/ringer


3. Power Supply: Re-chargeable Battery powered: 9V/14Ah, Solar back-up: 12V/30W

4. Time out: selectable 0-20 minutes 5. Temperature: -20°C~ +60°C emp

6. Relative Humidity: up to 90% 7. Built-in battery Standby: 21days

8. Built-in battery talking time: 21 hours

## **Telephone layout**

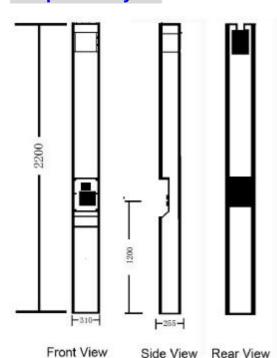



Solar panel over 600mm high

#### 1.5 Certification:

**FC** IP55





EMC: EN50121 (Railway application- Electromagnetic Compatibility)

EN55022: emissions EN55024: immunity

Ingress Protection: GB4208-93 IP67

**FCC** 

#### ITU-T Recommendations K21

Telephone Unit size: 2200\*310\*255mm Unit Net weight: 90kg 2pcs in a wooden box CTN box, size: 35X80X255

20GP: 88PCS 40GP: 176PCS 40HQ: 205PCS