


Reference Colour Card — Field Verification System



How to use

1. Print on plain MATTE paper at 100% scale ("Actual size", not "fit to page"). Do not laminate or use glossy stock - it causes glare.
2. Cut along the dashed lines. Keep the card flat; a bent or creased card samples unevenly.
3. During capture, hold this card in the right-hand box of the on-screen guide, alongside the vial in the left-hand box.
4. Keep the grey surface lit by the same light as the vial - no shadow across it, no reflection or glare on it.
5. If results look consistently off, re-measure a fresh print with any colour-picker tool. Toner/ink drift is common - the card should read close to the target value above before you trust the calibration.

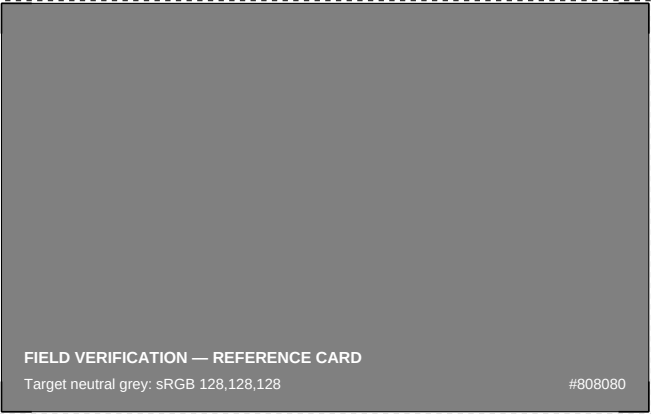