

THE MOST ADVANCED AND SAFEST CONSTRUCTION MACHINES

Export Quality | PAN India Service & Spares Support





BAR CUTTING MACHINE

Sparkline Series of Bar Cutting Machine SCM 42/52/55

Flywheel Diameter




- Flywheel diameter increased to get maximum power. [1.5 times movement of inertia increased].
- Stroke impact power increased. Easily cuts high tensile and ready to take advance high tensile rebar.

Energy Efficient IE2 Motors



Indian make Energy efficient IE2 Motors has national warranty. Cost of IE2 Motor is 10% higher than IE1 but the advantage for end users is a considerable reduction in running costs over the life cycle of the IE1 rated motor. Energy efficient motor, less running cost, Enhanced motor life and comes with national warranty.

Additional Grooves

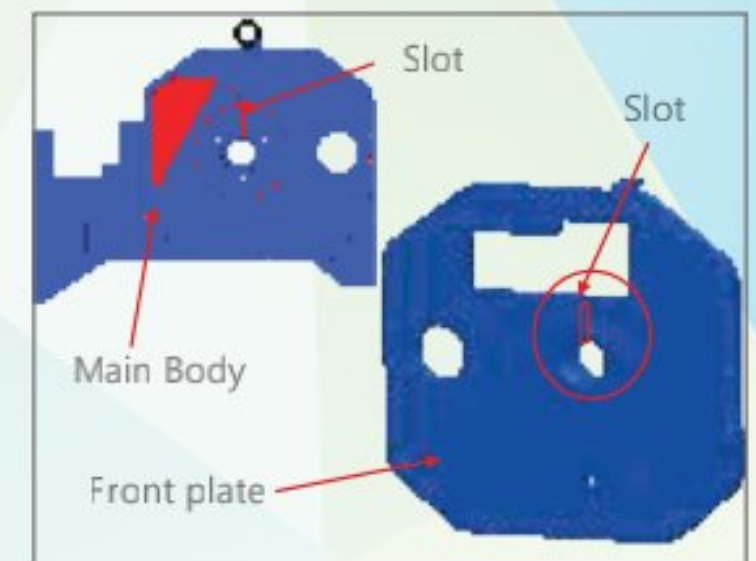


It is provided inside the cutting body to improve lubrication in shaft support bearing. It increases life of shaft support and other interconnect internal components.

Power Coating.




Body is made of high quality Steel, 7 tank process is done to activate surface for powder coat bonding and final coat of high quality PP [Pure polyester] powder coating. Superior finish and long life corrosion protection is given. Increase in machine life and reduction in maintenance cost.

Hardened Plates

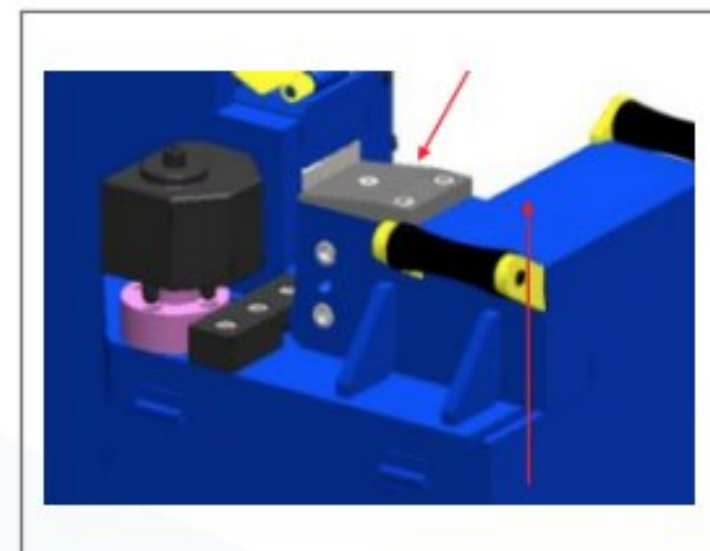

The hardened plate supports the blade from behind and helps in sliding the bars. The hardened plate ensures no gap develops between the body & cutting blade. It also keeps the blade in good shape for long time.

Voltage Protection Rating

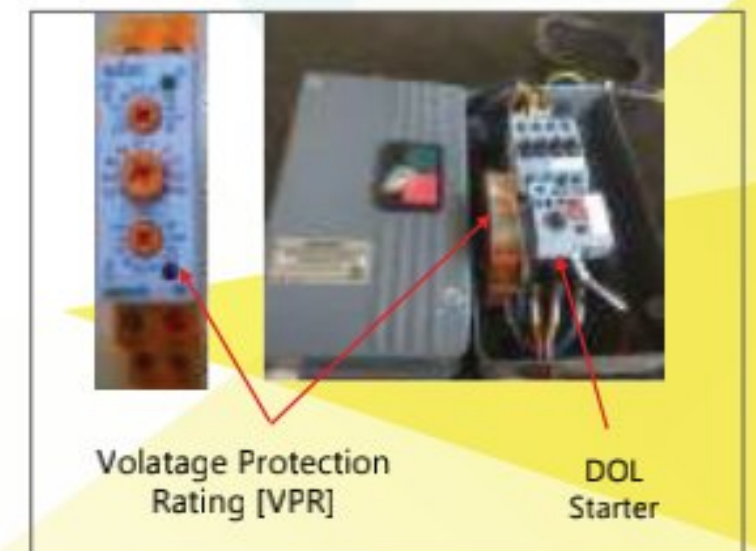

It is added inside the stator box. It protects machine and motor from high/low voltage.

TECHNICAL SPECIFICATION - CUTTING MACHINES

MODEL	DIMENSIONS [L x W x H]	WEIGHT	STORKE / MIN	MOTOR CAPACITY / RPM	OIL GRADE AND CAPACITY
SCM 42	1070 X 560 X 865 mm	400 Kg	90	5 HP, 3.7 kW/2880	OMALO 460, 4.25 ltr.
SCM 52	1135 X 740 X 930 mm	550 Kg	60	5 HP, 3.7 kW/2880	OMALO 460, 4.25 ltr.
SCM 55	1225 X 770 X 1025 mm	825 Kg	60	7.5 HP, 5.5 kW/2880	OMALO 460, 6.75 ltr.



BAR BENDING MACHINE

Sparkline Series of Bar Bending Machine SBM 42/52/55

Advance PLC Control Panel



PLC and safety logic to prevent over travel of bend wheel. Easy fault finding through PLC, Forward and reverse delay time is maintained through PLC for safe operation, bend wheel travel is restricted through PLC to prevent accident.

3 Bending Pre - selection



3 Bending Radius and be pre-set so without removing the locator pin three different degree bend is possible by bend selector switch. Pre-selection switch makes operation 2 time faster.

Grease Lubricated Gear Box



Advance technology grease lubricated gear box is used. Traditional oil lubricated gear box has high chances of oil leakage. Unlike oil lubricant gearbox there is no need to check lubricant level frequently. Also NO leakage issues.


TECHNICAL SPECIFICATION - BENDING MACHINES

MODEL	DIMENSIONS [L x W x H]	OVERALL WEIGHT	MOTOR CAPACITY/ RPM	BEND WHEEL SPEED	BEND WHEEL DIA	MAX. BEND RADIUS	BUSHES SUPPLIED
SBM 42	1000 x 715 x 1040 mm	330 Kg	5 HP/1440	9.4 rpm	300 mm	4D of Ø32	Ø60, Ø70, Ø100 & Ø120
SBM 52	1100 x 815 x 1070 mm	390 Kg	5 HP/1440	9.4 rpm	425 mm	5D of Ø32, 4D of Ø36	Ø60, Ø70, Ø100, Ø120, & Ø160
SBM 55	1210 x 915 x 1200 mm	555 Kg	7.5 HP/440	6.0 rpm	500 mm	6D of Ø36, 5D of Ø40	Ø60, Ø70, Ø100, Ø120, Ø160 & Ø220
						OPTIONAL 8D of Ø40	Ø320

CAPACITY CHART OF REBAR CUTTING AND BENDING MACHINES

FEATURES	SBM 42								SCM 42								SCM 52 / SBM 52								SCM 55 / SBM 55									
Dia of Bars [Max. Dia in mm]	36	32	25	20	16	12	10	8	36	32	25	20	16	12	10	8	40	36	32	25	20	16	12	10	8	40	36	32	25	20	16	12	10	8
No. of Bars Tensile strength 41-50 kg/mm^2 {Elongation - 12% Max}	1	1	1	2	3	3	4	6	1	1	1	1	2	3	4	5	1	1	1	2	2	3	5	6	8	1	1	1	2	2	3	5	7	8
No. of Bars Tensile strength 51-60 kg/mm^2 {Elongation - 16% Max}	-	1	1	1	2	3	4	5	-	1	1	1	2	3	3	4	-	1	1	1	2	3	4	6	8	1	1	1	2	2	3	5	7	8
No. of Bars Tensile strength 61-70 kg/mm^2 {Elongation - 14.5%/ 10%Max}	-	1	1	1	2	3	4	5	-	-	-	1	2	3	3	4	-	1	1	1	2	3	4	5	7	1	1	1	2	2	3	5	6	8
No. of Bars EQR [Tensile strength 71-78 kg/mm^2 {Elongation - 18% Max}	-	-	1	1	2	3	4	5	-	-	-	1	2	3	3	4	-	-	1	1	2	3	4	5	7	1	1	1	2	2	3	5	6	8

Series Of Rope Suspended platform

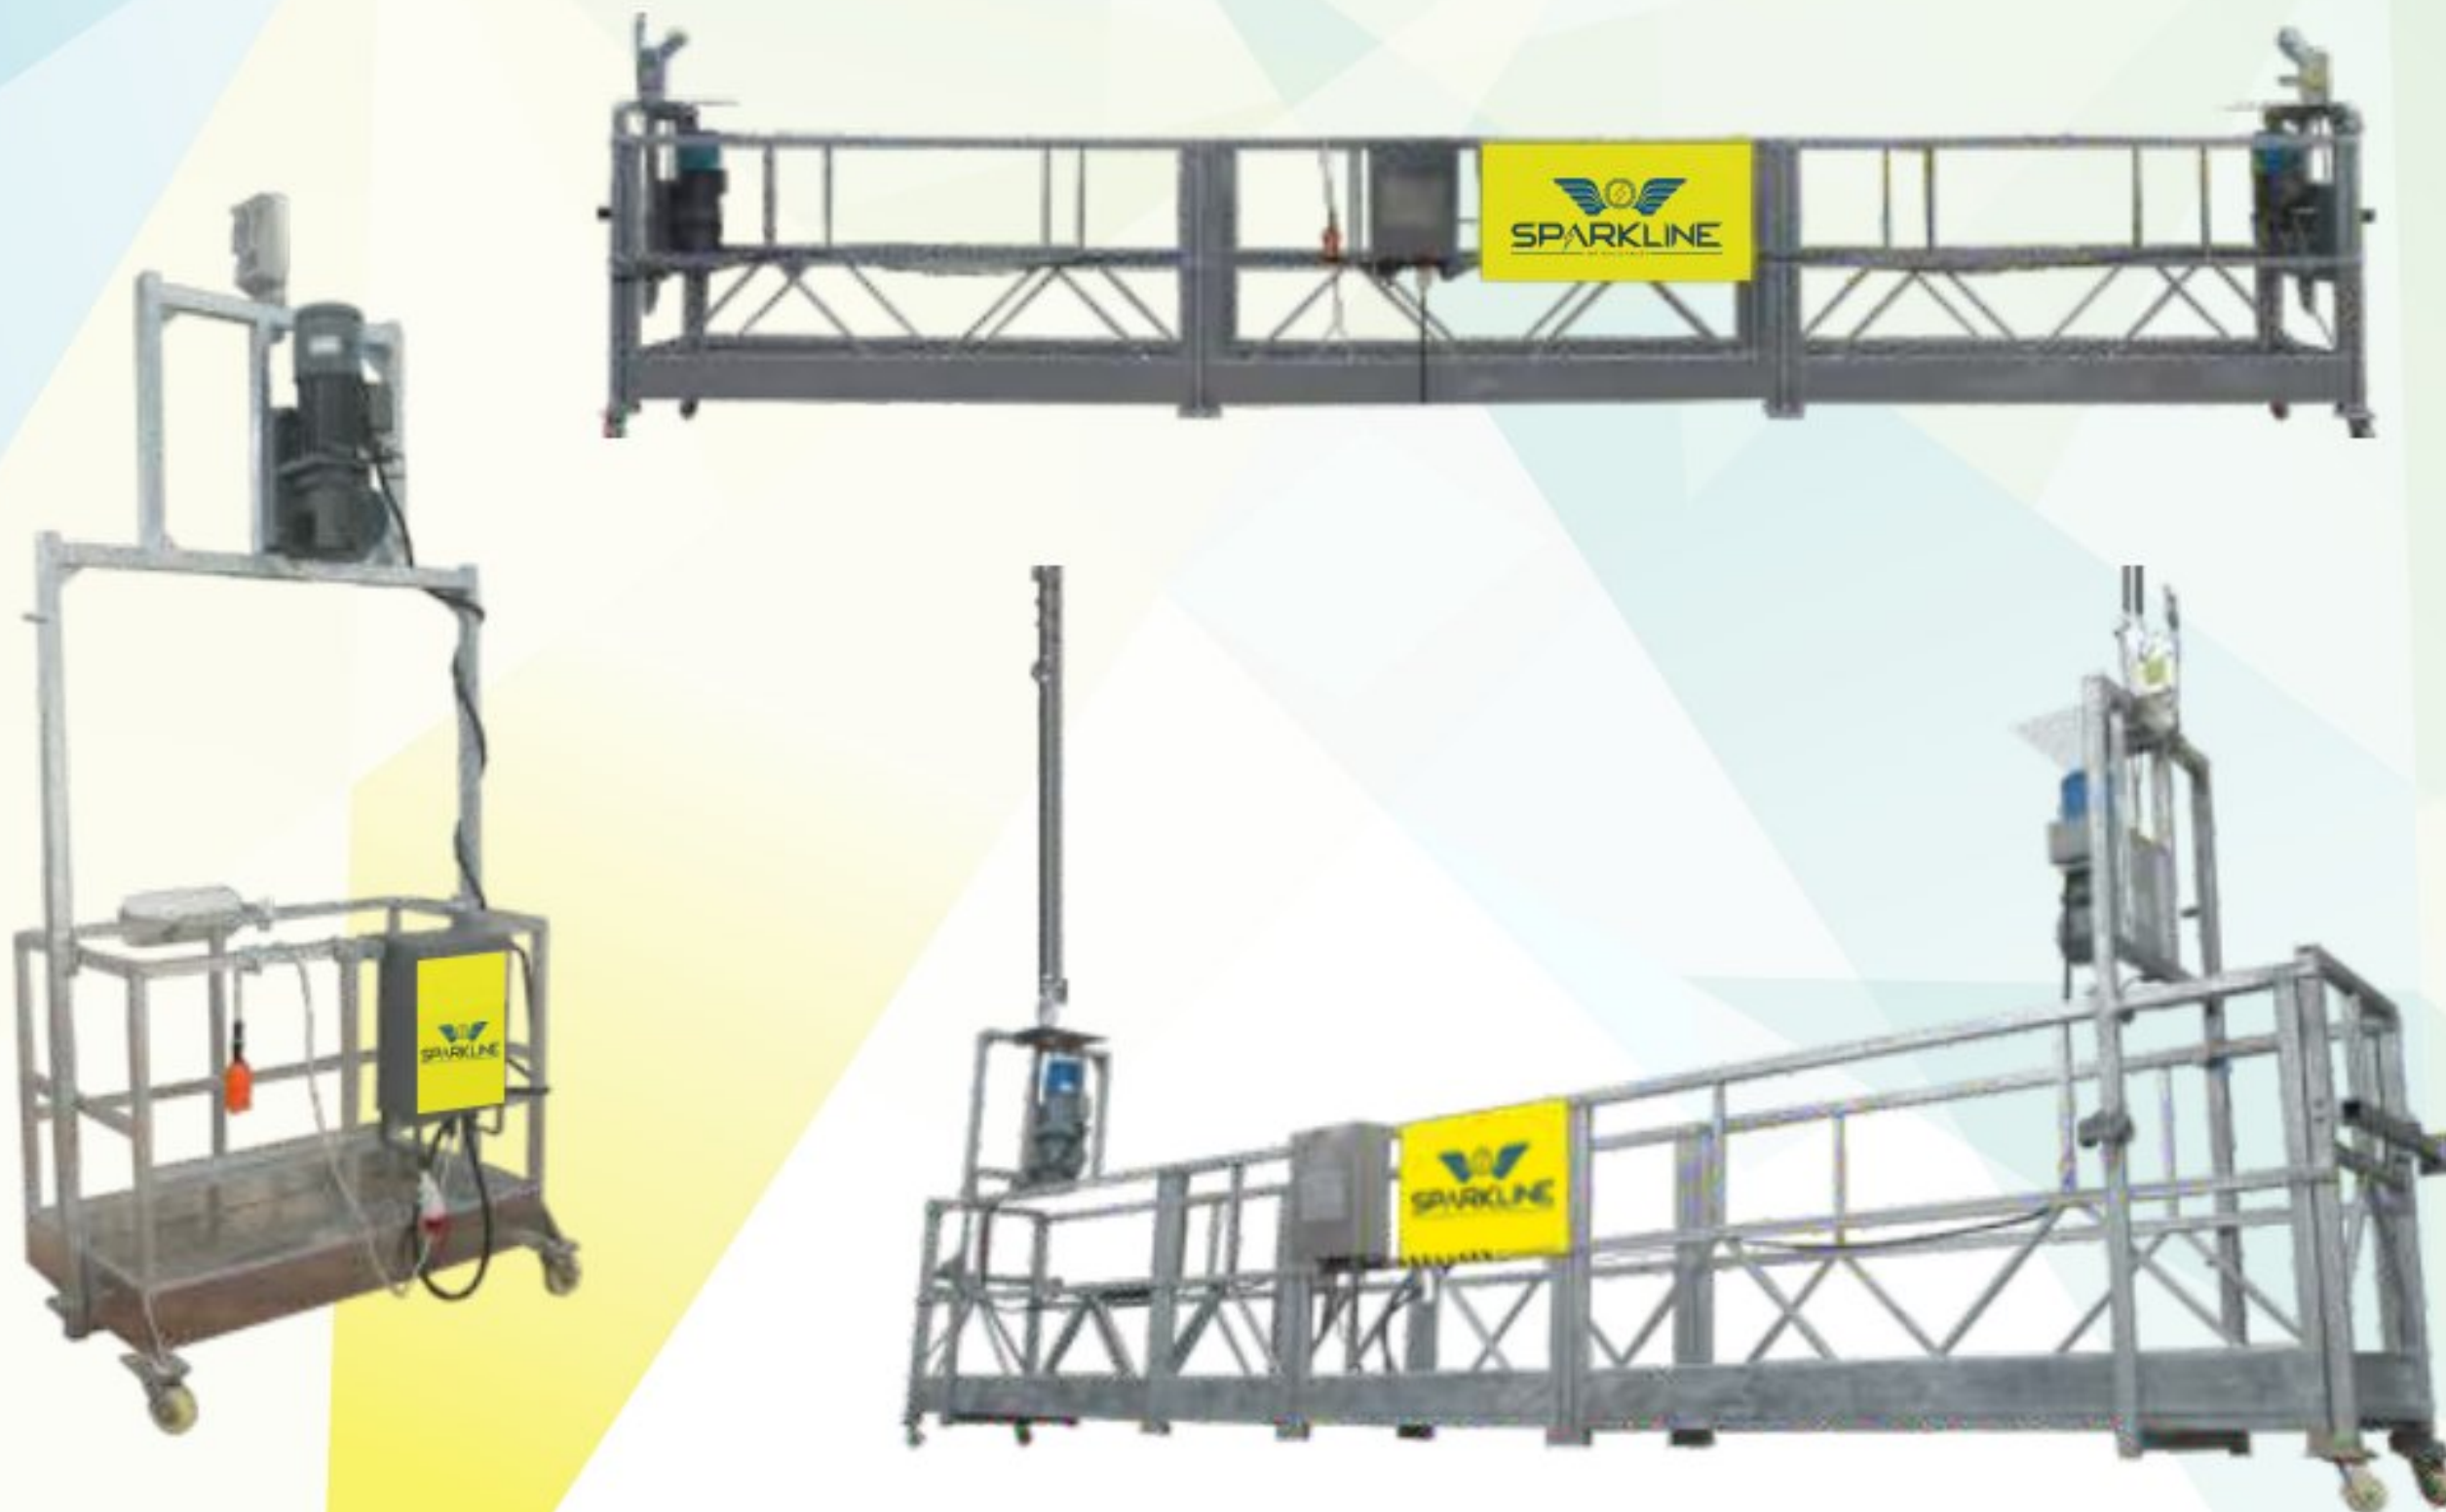

TECHNICAL SPECIFICATIONS

Model No.			SRP 80 P	SRP 100
Rated Load			800kg.	1000kg.
Ascend Speed			9-11m/min	8.8m/min
Suspended Platform Size (LXW)			(2.5mX2+1.5+1)X0.69	(2.5mX2+1.5+1)X0.69
Wire Rope			4X31SW+NF-9.1	4X31SW+NF-10.2
Hoist	Hoist Model		LTD 80	LTD 100
	Rated Lifting Force		8kN	10kN
	Electric Motor	Type	YEJ2-90L-4D	YEJ2-90L-4D
		Power	1.8kW	1.8kW
		Voltage	AC380V	AC415V
		Braking Torque	15.2 Nm	15.2 Nm
Safety Lock Type			Tilt Proof Safety Lock	Tilt Proof Safety Lock
Suspension Mechanism	Height Adjustment		1.15m-1.75m	1.15m-1.75m
	Front Beam Extent		1.1m-1.7m	1.1m-1.7m
Machine Weight	Suspended platform (inc. Hoist, Safety Lock, Electric Control Box)		530kg	650kg
	Suspension Mechanism		2x200kg	2x200kg
	Balance Weight		1000kg	1200kg
	Whole Machine Weight (excl. Wire Rope & Cable)		1930kg	2250kg
Platform Structure			Galvanised	Galvanised

Series of Passenger & Material Hoist (SPM) And Multi-functional Hoist (SMH)



Passenger & Material Hoist (SPM)



Multifunctional Hoist with Passenger



Multifunctional Hoist with Rebar carrying Attachment

TECHNICAL SPECIFICATIONS

FEATURES		SPM200	SPM 150	SPM 100	SMH 150	SMH 100
Model		Single Cage Rack & Pinion Passenger & Material Hoist			Rack & Pinion Multifunctional Material Hoist	
Capacity		2.0 Ton	1.5 Ton	1 Ton	1.5 Ton	1 Ton
Max Height		150 mtrs.	150 mtrs.	100 mtrs.	150 mtrs.	100 mtrs.
Speed		30 mtrs/min.	30 mtrs/min.	30 mtrs/min.	30 mtrs/min.	30 mtrs/min.
Motor Capacity Rossi		9.57kW(87Hz) x2 nos.	6.9 kW(87Hz) x2 nos.	5.9 kW(87Hz) x2 nos.	6.9 kW(87Hz) x2 nos.	5.19 kW(87Hz) x2 nos.
Safety Device		SSD 3500	SSD 3500	SSD 3500	SSD 3500	SSD 3500
VFD Capacity		30 kW	15 kW	11 kW	15 kW	11 kW
Cage Size		3 x 1.4 x 2.3mtr.	2.5 x 1.4 x 2.3mtr.	2.2 x 1.4 x 2.3mtr.	2.0 x 1.2 x 1.5	2.0 x 1.2 x 1.5
Wall Tie interval		6 mtr - upto 120 mtr. 3 mtr- above 120 mtr.	6 mtr - upto 120 mtr. 3 mtr- above 120 mtr.	6 mtr	6 mtr - upto 120 mtr. 3 mtr - above 120 mtr.	6 mtr
Mass	Size (mm)	Square: 450 x 450 x 1508	Square: 400 x 400 x 1508	Triangle: 400 x 500 x 1508	Square: 400 x 400 x 1508	Triangle: 400 x 500 x 1508
	Section (mm)	Square Tube: 50 x50 x 4	Square Tube: 50 x50 x 4	Front Square Tube: 50 x50 x 4 Rear Price : Dia Ø48.8 x 4	Square Tube: 50 x50 x 4	Front Square Tube: 50 x50 x 4 Rear Price : Dia Ø48.8 x 4
Function Size		3.5 x 3.4 x 0.3	3.0 x 3.4 x 0.3	3 x 3.4 x 0.25	3.5 x 2.9 x 0.3	3.5 x 2.9 x 0.25

SCRAP STRAIGHTENING MACHINE



Model	GX6-25 with cutter
Motor Power	15kW / 20hp
Machine Diameter	6-25mm
Cutter Diameter	6-12mm
Reducer Model	400
Shortest Processing	300mm
Feed Inlet	7
Working Speed	25m/min
Weight	900kg Approx



Model	GX6-14 scrap straightening machine
Machine Diameter	6-14mm
Reducer	250
Feed Inlet	5pics
Working Speed	28m/min
Shortest Processing	300mm
Motor Power	5.5Kw
Diemension	1200X750X1200mm
Weight	520Kg

RING MAKING MACHINE



Model No.	GF20D
Weight	100kg
Voltage	220V/415V
Bending Diameter	4-16mm
Bending Speed	1440r/min
Motor Power	2.2kW/3hp
Paddles	2No's



Model	GF36
Volatge	415V
Motor Power	3kW
Bending Diameter	4-32mm
Bending Speed	6-10r/min
Paddles	2 No's
Weight	240kg

LOOKING FOR CONSTRUCTION MACHINERY ON RENT

Sparkline Engineering provides high-quality construction machinery rentals, including tower cranes, men & material lifts, and rope suspended platforms (SRP). Benefit from flexible rental terms, competitive pricing, and dependable service tailored to your construction and industrial needs.



OUR SERVICES

Spares & Services – At Sparkline, we believe in providing comprehensive support for our machines even beyond the warranty period. We maintain a vast inventory of genuine spare parts to ensure swift assistance, minimizing downtime for our customers. Our commitment extends to delivering immediate on-site service to promptly address any machine breakdowns.

AMC

Once the warranty expires, customers often face challenges with machine maintenance and repairs. At Sparkline Engineering, we offer an Annual Maintenance Contract (AMC) designed to extend the lifespan of your machines and ensure uninterrupted project completion


Installation & Dismantling

At Sparkline, we maintain a team of highly skilled engineers who are expertly trained to ensure timely and precise installation and dismantling services

Training

Sparkline Engineering provides training programs for employees and operators to ensure safe machine operation, minimize breakdowns, reduce maintenance needs, and follow essential operational guidelines.

OUR VALUABLE CUSTOMERS :

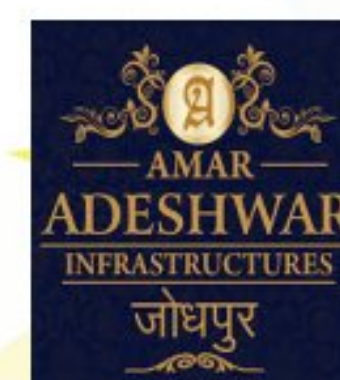

Head Office : 06, Jeevan Shadhna Complex, Maniyasa Society, Maninagar, Ahmedabad - 380008

Corp Office : A- 1105, Titanium Heights, Opp. Vodafone House, Corporate Road, Prahladnagar, Ahmedabad - 380015

www.sparklineindia.com

sparklineengineering01@gmail.com
rakesh@sparklineindia.com

9998151768

Rajasthan Office : Vinayak Enterprise D-101, Sector-4, Chitrakoot, Vaishalinagar, Jaipur, Rajasthan - 302021

vinayakenterprise2121@gmail.com
mukesh@sparklineindia.com

9461124971