


Tooling Lifecycle

Client operating report and user guide

From approved tooling master to physical QR asset, production issue, blade grinding, and trace reporting.

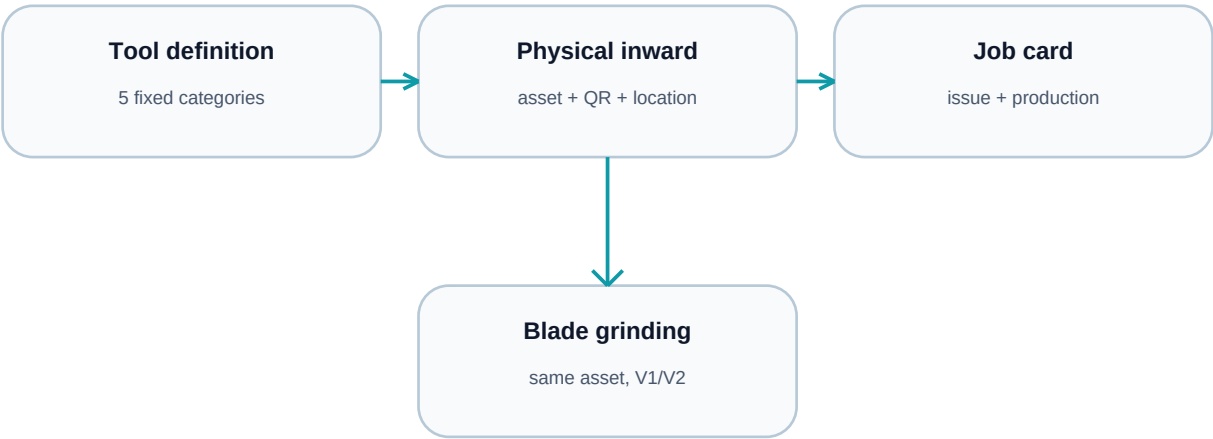

Release scope

This report explains the tooling and specification-sheet flows now available in the ERP. It is written for the client, store, production, quality, and supervisory teams. Technical implementation details are intentionally kept out of the operating instructions.

At a glance

Control	What the user gets
Five fixed categories	Notch, Blade, Holder, V + Flat, Punch
Physical identity	One asset number and QR value for every inwarded unit
Trace	Issue, return, maintenance, grinding, job-card output
Spec sheet	Approved values only, with mandrel-linked tube selection
Suggestions	Removed from the page and calculation flow

1. Tooling master

Open Masters > Tools. The five categories are fixed. The plant team can create multiple tool definitions under every category, but cannot create a sixth category.

Category	Fields maintained
Notch	Type, thickness, design, degree
Blade	Type, thickness, height, length
Holder	Thickness, height, length
V + Flat	Length, thickness
Punch	Punch option

Adding a definition

- Select Add Tool.
- Choose one of the five fixed categories.
- Enter the category points and status.
- Save. The definition becomes available to the specification sheet while active.

Editing approved dropdown values

Use the Editable dropdown registry to maintain the values used by the master and the notch process. Direction, distance, and depth are process option values, not extra tool categories. Only active values appear for selection.

Important

Master definition and physical asset are separate records. Updating a definition does not erase the saved snapshot or history of a tool that was already inwarded.

2. Physical inward and QR identity

Use Inward beside the tool definition. Enter receipt date, quantity, and a Location Master position. The system expands the quantity into individual physical assets.

Generated information	Example
Asset number	TA-260714-001
QR value	hariom://tool/TA-260714-001
Starting status	Available
Grinding version	V0
Location	Tool Rack A

Example: two plain blades received on 14-Jul-2026 create two separate assets. They share the same definition but each has its own location, status, issue history, usage count, and production output.

3. Physical lifecycle

The ledger shows only the actions valid for the current physical status.

Status	Use
Available	Ready to issue, maintain, grind (blade), or scrap
Issued	Assigned to a job card and stage; return after use
Maintenance	Temporarily with maintenance; complete when usable
Grinding out	Blade sent for sharpening; grinding return completes the cycle
Scrap	Permanently removed from use; history retained

Issue to production

- Search or scan the QR/asset number.
- Select Issue.
- Enter the job card ID and production stage.
- Save. The asset becomes Issued and the job card stores the exact asset ID.

Blade grinding

Return the blade if it is issued, select Grinding out, send it for sharpening, then select Grinding return. The same asset number remains in use and the version increments from V0 to V1, then V2, and so on.

A non-blade tool cannot use the blade grinding action.

4. Production output and trace

At job-card completion, actual completed output is recorded against the physical asset IDs assigned to the stage. A retry cannot double-count the same completion.

Trace point	Example
Job card	JC-2026-014
Stage	Notching
Physical asset	TA-260714-001
Good output	1,200 tubes
Scrap output	15 tubes
Next lifecycle	Returned, then grinding V1

This answers how much each blade produced, how much scrap was associated with it, which job cards used it, and how many grinding cycles it completed.

5. Specification sheet

Open Specifications > New Specification. The sheet uses active tool definitions and active process option values. Discontinued records are not shown.

The notch section contains exactly eight process fields

- Notch type
- Notching blade
- Notching holder
- V + Flat
- Punch
- Notch direction
- Notch distance
- Notch depth

The first five are tool selections. Direction, distance, and depth are editable process options. Tool points are displayed from the master and are not retyped in the specification sheet.

Mandrel and tube rule

Select a mandrel first. The tube-size picker then becomes active and shows only tube IDs within plus or minus 1 mm of the selected mandrel. This keeps the sheet aligned with the physical mandrel choice.

Suggestions are removed

The specification sheet no longer shows suggestion cards or runs the removed suggestion calculation route. The user builds and saves the approved recipe directly from the masters and entered production values.

Browser evidence - searchable mandrel, filtered tube control, and no suggestion card (1 of 3)

NEW SPECIFICATION SHEET

Save Draft

Client requirement first. Everything else derives from it.

Pick customer, mandrel, tube, target weight, and CS first. Then build the paper mix and the manufacturing outputs will follow from one workbook rule.

GLUE 15.0% PARCHMENT 1.5% WET DIVISOR 0.910

DESIGN SPECIFICATIONS

CLIENT REQUIREMENT

Start with the commercial ask. The whole sheet derives from this block.

CUSTOMER MASTER TUBE SIZE MANDREL

TUBEOS
WORKSPACE
Specifications

DESIGN > SPECIFICATIONS Guide

MATERIAL RULE SHEET

One formula, one parchment gate, one adhesive split.

Wet target = dry target + 0.910. Glue and parchment are percentages of client dry

target. The glue and parchment are percentages of client dry target. The glue and parchment are percentages of client dry target.

BOOKS OPEN OPEN OWNER PLANT A Logout

Select customer MND-1... ALLOWED Yes

TUBE SIZE

110 x 122 x 149.9

TARGET DRY

WEIGHT

289.8 G

REQUIRED CS

KGF

Only tube IDs within +/- 1 mm of the selected mandrel are shown.

SHEET
REFERENCE**MND-
170905-
110.65-
110X122**

Pick
customer +
tube +
mandrel

MANDREL
ID BAND**110.65
mm**

Min 110.55
· Max
110.75

RECIPE-LED
OD**110.65
mm**

Wall 0.0000
mm

WET
DIVISOR**0.910**

Default
0.91 from
9%
moisture
loss

TARGET WET /
DRY**0.00 /
289.81
g**

Dry target
289.81 g with
divisor 0.910

TARGET
FORMULA
SPLIT**43.47
g glue ·
4.35 g
parchmen**

0.00 g
required
paper

PREDICTED
WET / DRY**0.00 /
0.00 g**

No recipe
applied yet

TUBE DRY
BAND**286.81
-
292.81
g**

Apply a
recipe to
compare
against the
min/max
band

ALLOWED PARCHMENT FAMILIES

Choose the family pool once. Vendor and color stay
downstream.

0
SELECTED

AMMA

CHINA

SAGAR

ADHESIVE BREAKDOWN

Pick 2-3 masters. Ratios must total 100% of the fixed glue
band.

RATIO

100%

Tl-4 (20100)

30

0.00

Remove

Vinsol (30100) v

70

0.00 g

Remove

Adhesive weight updates from the live paper total only.

Add Component

RECIPE MIX

Use three to five papers, stay under eighteen plies, and let the live mix drive the weights.

PAPERS

APPLIED COMBO RULE

Build the live recipe from approved paper, adhesive, and parchment masters.

3-5 PAPERS · 18 PLY MAX

Target wet = target dry ÷ 0.910. Glue and parchment are fixed from client dry weight; paper fills the remaining wet target.

PAPER TOTAL

0.00 g

CURRENT RECIPE WET / DRY

0.00 / 0.00 g

Target wet 0.00 g

DRY VS BAND

0.00 g

CODE	VARIETY	GSM	BF / PLY	THICK / PLY	WEIGHT	PLY	PLY NO.	ACTION
-	Select paper variety v	0	0.00 LOCKED	0.0000 mm Bulk 0.00 - Ply bond 0.00	0.00		1	Remove
TOTAL-ALL-PLY		0	0.00	0.0000	0.00	1	-	-

Paper rows drive wall thickness, tube paper weight, and the manufacturing output.

Add recipe row

LIVE RECIPE SUMMARY

Select customer

110 × 122 × 149.9

ONE BAMBOO YIELD

0 pcs

0 mm selected · 1520 mm usable

REQUIRED PAPER

0.00 g

0.00 g wet target

RECIPE STATUS

0.00 g

Select paper rows to build the live recipe against the target.

Recalculating recipe math after input settles. You can keep typing.

Hari Om Paper ERP | Tooling lifecycle guide

Page 6

MANUFACTURING MATRIX

ID comes from mandrel, OD comes from wall, and bamboo output follows the live recipe.

Bamboo weight is now the predicted recipe output for the usable cut length after trim loss.

MANDREL ID BAND

110.65 mm

Min 110.55 · Max 110.75

WALL / OD

0.0000 / 110.65 mm

OD = ID + 2 × wall

CURRENT RECIPE TUBE

0.00 / 0.00 g

Target wet 0.00 g · Paper 0.00 g · Glue 0.00 g

BAMBOO WET / DRY

0.00 / 0.00 g

0 pcs from 1520 mm usable

MANUFACTURING SPECIFICATION

Average is the live working size. Min/max stay tied to mandrel tolerance and recipe wall.

PARAMETER	MIN	AVG	MAX
I.D	110.55 mm	110.65 mm	110.75 mm
O.D	110.55 mm	110.65 mm	110.75 mm
Thickness	0.00 mm	0.00 mm	0.00 mm
Bamboo LT	0 mm	0 mm	10 mm
Tube Dry	287 g	290 g	293 g
Tube Wet	315 g	0 g	322 g

BAMBOO AND OUTPUT LOGIC

This block is what moves downstream into the job card.

SELECTED BAMBOO

0 mm

1520 mm usable after trim

TUBES / BAMBOO

0 pcs

150 mm tube length

PAPER / MM

0.0000 g

0.00 g required paper

NOTCH + TOOLING

Only the downstream tooling fields that still matter to the job card and print sheet.

EXPAND WHEN NEEDED

PACKING

Compact packing handoff only: box, plastic, fadda, and per-box counts.

EXPAND WHEN NEEDED

VALIDATION

Final footer and release checks only. Keep this out of the way until the sheet is ready.

EXPAND WHEN NEEDED

6. Reports and rejection trace

Open Reports > Tooling. Use the report for current physical status and output by asset.

- Total assets and counts by status.
- Category-level physical stock.
- Searchable physical ledger with location and QR value.
- Usage count and produced quantity per asset.
- Scrap quantity, grinding version, and current job assignment.
- Lifecycle history for inward, issue, return, maintenance, grinding, and scrap.

Customer rejection investigation

- Start with the order, finished-good lot, or job card.
- Read the physical tool asset IDs on the completed job-card stage.
- Open each asset from the tooling ledger.
- Review inward, location, issue/return, maintenance, grinding versions, and production output.
- Compare the asset output with the job-card and QC records.

The result is a forward and backward trace from customer rejection to job card, physical tool, inward record, and maintenance/grinding history.

7. Daily checklist

- Maintain definitions and approved dropdown values before use.
- Inward every physical unit and assign its Location Master position.
- Apply the QR label.
- Issue and return the exact asset on every job card.
- Use grinding only for blades.
- Complete the job card so output is recorded.
- Review the tooling report at shift or month end.
- Discontinue or scrap records instead of deleting history.

Browser evidence - tooling master, option registry, and QR ledger

Tooling master and physical ledger (1 of 5)

Home

Books

Tools

Jobs

Reports

Settings

Help

TUBEOS
WORKSPACE

Masters

FOUNDATION > MASTERS

Guide

BOOKS OPEN
OPEN

OWNER

30

PLANT A

Logout

MASTER DATA WORKSPACE

Tooling Master

Five fixed tooling categories define the spec-sheet dropdowns. Physical units are inwarded and controlled below with QR, location, issue, return, grinding, and production usage.

Spec sheets

Tooling report

TOTAL

4

ACTIVE

4

DISCONTINUED

0

Search tools, attributes, status

All categories

+ Add Tool

TOOL	CATEGORY	STATUS	USAGE	ACTIONS
Double Punch 5x10mm[center dist. 30mm] Seeded from Sanathan Polycoat P workbook	Punch	ACTIVE	0 spec/job logs	Edit Inward Discontinue Disable

SA

Double Punch 5x10mm[center dist. 30mm]

Seeded from Sanathan Polycoat P workbook

Punch

ACTIVE

0 spec/job logs

Edit

Inward

Discontinue

Disable

Double Punch 5X10mm[center dist. 30mm]

Seeded from Sanathan Polycoat P workbook

Punch

ACTIVE

0 spec/job logs

Edit

Inward

Discontinue

Disable

Double Punch 5X10mm[center dist. 30mm]

Seeded from Sanathan Polycoat P workbook

Punch

ACTIVE

0 spec/job logs

Edit

Inward

Discontinue

Disable

EDITABLE DROPDOWN REGISTRY

Tool attributes

Only these option values feed the five tooling definitions and the notch process fields.

Notch

type

New option

+ Add

RIADF - TYPE

RIADF - TYPE

PHYSICAL TOOL CONTROL

QR asset ledger

TOTAL

0

AVAILABLE

0

ISSUED

0

GRINDING

0

Tooling master and physical ledger (3 of 5)

BLADE · TYPE

Plain

Edit

BLADE · TYPE

Half Serration

Edit

BLADE · TYPE

Full Serration

Edit

NOTCH · DEGREE

50

Edit

NOTCH · DEGREE

55

Edit

NOTCH · DEGREE

60

Edit

NOTCH · DESIGN

Plain

Edit

NOTCH · DESIGN

Step

Edit

NOTCH · NOTCH_DEPTH_MM

3.5 mm

Edit

NOTCH · NOTCH_DEPTH_MM

3.5 mm

Edit

BLADE · TYPE

Plain

Edit

BLADE · TYPE

Half Serration

Edit

BLADE · TYPE

Full Serration

Edit

NOTCH · DEGREE

50

Edit

NOTCH · DEGREE

55

Edit

NOTCH · DEGREE

60

Edit

NOTCH · DESIGN

Plain

Edit

NOTCH · DESIGN

Step

Edit

NOTCH · NOTCH_DEPTH_MM

3.5 mm

Edit

NOTCH · NOTCH_DEPTH_MM

3.5 mm

Edit

Inward a physical unit against a definition, assign its Location Master position, and use the QR asset number for issue, return, grinding, and trace reports.

Tooling master and physical ledger (4 of 5)

	4.0 mm		4.0 mm	
	NOTCH · NOTCH_DEPTH_MM	Edit	NOTCH · NOTCH_DEPTH_MM	Edit
	4.5 mm		4.5 mm	
	NOTCH · NOTCH_DIRECTION	Edit	NOTCH · NOTCH_DIRECTION	Edit
	Clockwise		Clockwise	
	NOTCH · NOTCH_DIRECTION	Edit	NOTCH · NOTCH_DIRECTION	Edit
	Anticlockwise		Anticlockwise	
	NOTCH · NOTCH_DISTANCE_MM	Edit	NOTCH · NOTCH_DISTANCE_MM	Edit
	10.0		10.0	
	NOTCH · NOTCH_DISTANCE_MM	Edit	NOTCH · NOTCH_DISTANCE_MM	Edit
	10.50		10.50	
	NOTCH · NOTCH_DISTANCE_MM	Edit	NOTCH · NOTCH_DISTANCE_MM	Edit
	11.00		11.00	
	NOTCH · TYPE	Edit	NOTCH · TYPE	Edit
	Bottom LHS		Bottom LHS	
	NOTCH · TYPE	Edit	NOTCH · TYPE	Edit
	Bottom RHS		Bottom RHS	
	NOTCH · TYPE	Edit	NOTCH · TYPE	Edit
	Top RHS		Top RHS	

PUNCH · PUNCH

Single

Edit

PUNCH · PUNCH

Double

Edit

PUNCH · PUNCH

N/A

Edit

PUNCH · PUNCH

Single

Edit

PUNCH · PUNCH

Double

Edit

PUNCH · PUNCH

N/A

Edit

PHYSICAL REGISTER

Inwarded tools and lifecycle

Q Search QR / asset no.

Scan QR

Open tooling report

ASSET / QR	DEFINITION	STATUS	LOCATION	GRINDING	PRODUCED	ACTION
------------	------------	--------	----------	----------	----------	--------

LEDGER

Recent Tool Events

Open report

TIME	TOOL	EVENT	SOURCE	REFERENCE
------	------	-------	--------	-----------

Release verification

The implementation was checked locally with service, unit, build, static, and focused browser verification. The application is ready for client data onboarding; the final plant acceptance steps are listed below.

Deployment status

The tooling changes are committed and pushed to GitHub. The linked Railway service remains online on its previous deployment. Railway refused the new upload because the account trial has expired; after selecting a Railway plan, redeploy the latest pushed commit and run the authenticated production smoke test.

Verification	Result
Service compilation	Passed
Master tooling contract	5 passed
BFF inward-authority contract	4 passed
Physical lifecycle tests	31 passed
Web unit/static checks	Passed
TypeScript and production build	Passed
Dependency audit	0 vulnerabilities
Runtime shutdown override	Passed
Focused browser tooling/spec suite	2 passed
BFF health and service startup	Healthy / ready

Client onboarding acceptance

- Confirm Location Master positions.
- Load approved tool definitions and option values.
- Inward opening physical tool stock.
- Print and apply QR labels.
- Run one supervised issue/return cycle.
- Run one supervised blade grinding cycle.
- Complete one supervised job card and verify the tooling report.

Prepared for client operating use