
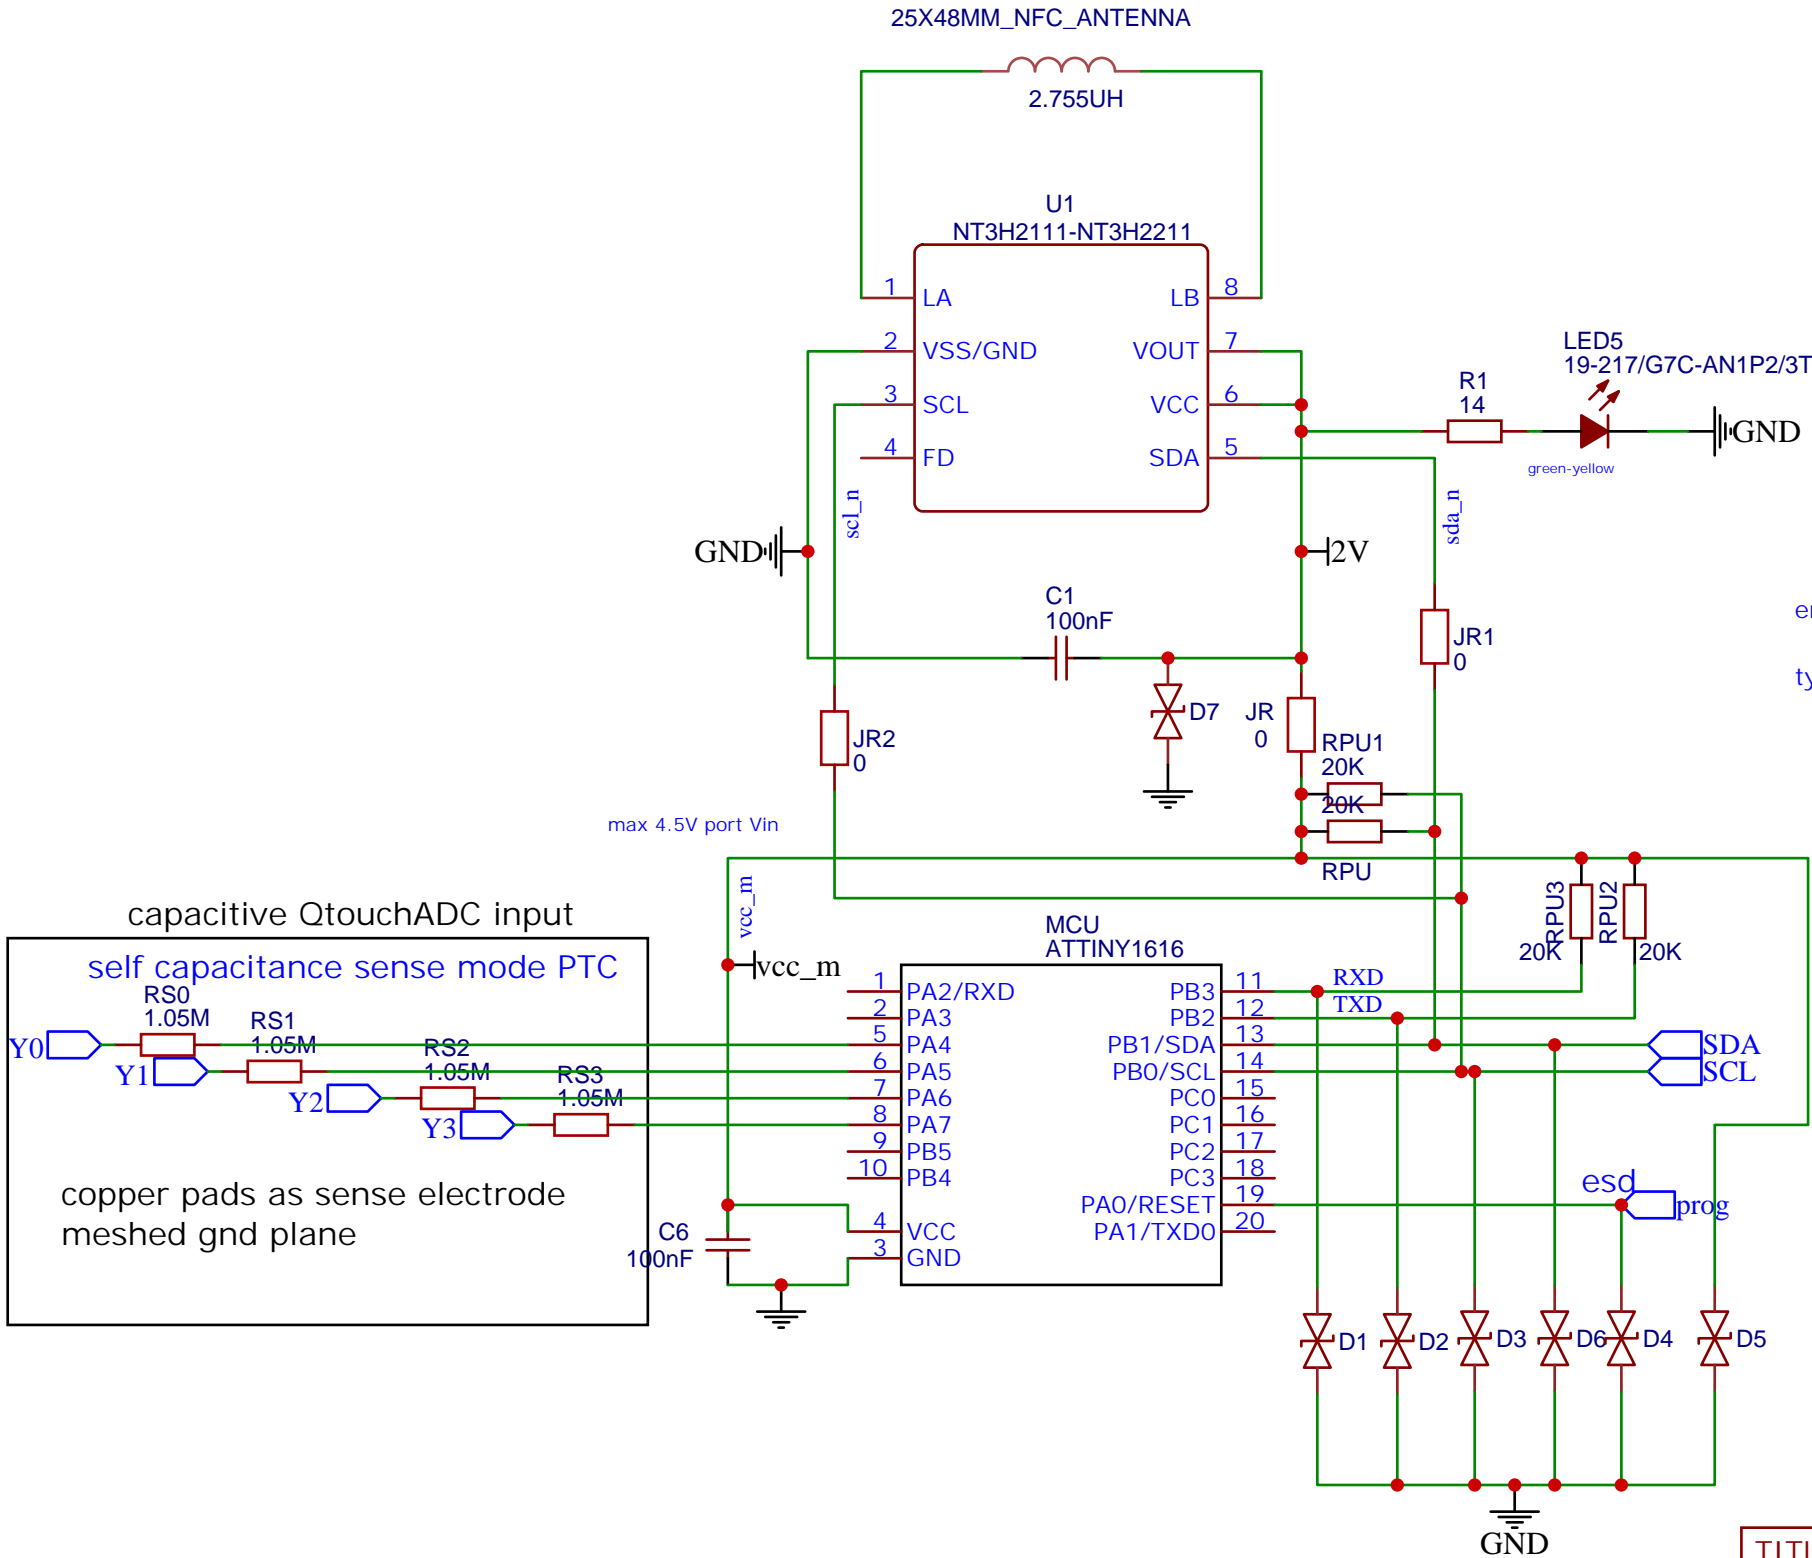


The conditions for pulling the field detection signal to low,
FD_ON can be: • The presence of the NFC field •
The detection of a valid command (Start of Communication) • The selection of the IC

equivalent circuit of antenna

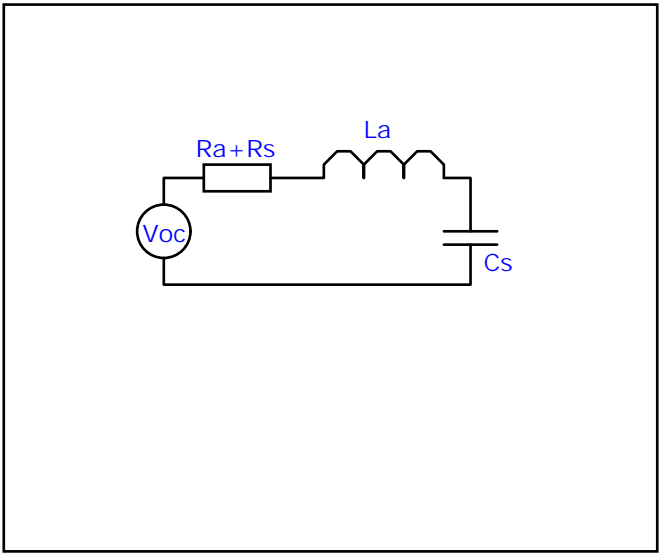

energy harvesting capability:
typically 2V at 5mA with phone Transmitter

max 5Mhz
use ATTINY416 as this application won't need much memory

| | | |
|------------------|-------------------|------------------|
| TITLE: version 1 | | REV: 1.0 |
| EasyEDA | Company: devThijs | Sheet: 1/1 |
| | Date: 2020-01-20 | Drawn By: ThijsH |