



AQI BATTERY REV A / ENGINEERING PROTOTYPE - 44 x 90 mm

65 mm unprotected cell. Observe polarity. Attach the required 10k cell NTC. Firmware must qualify USB input before increasing current.


USB-C / 10-PIN GH LINK

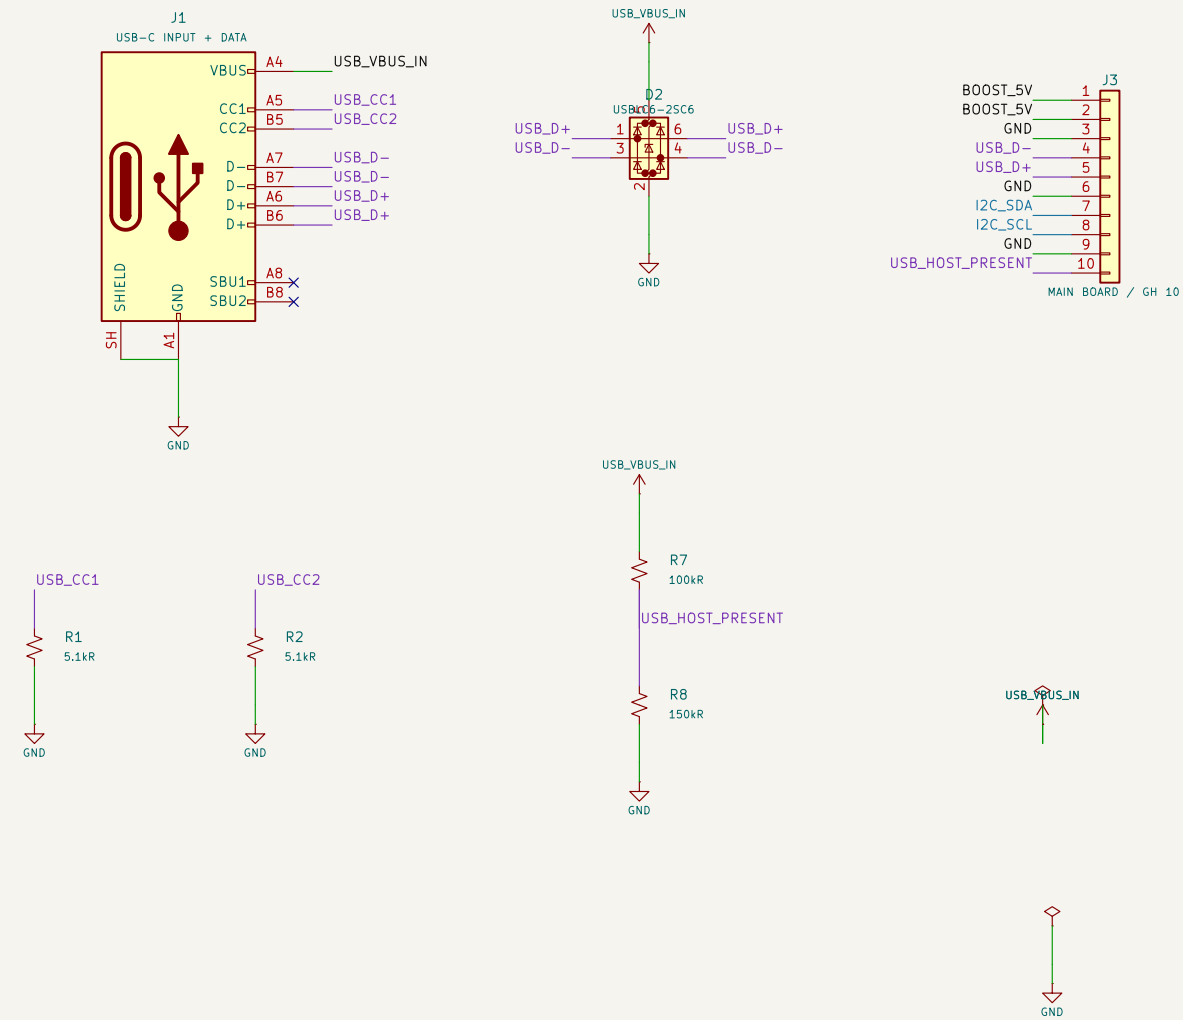


CHARGER / USB100 DEFAULT

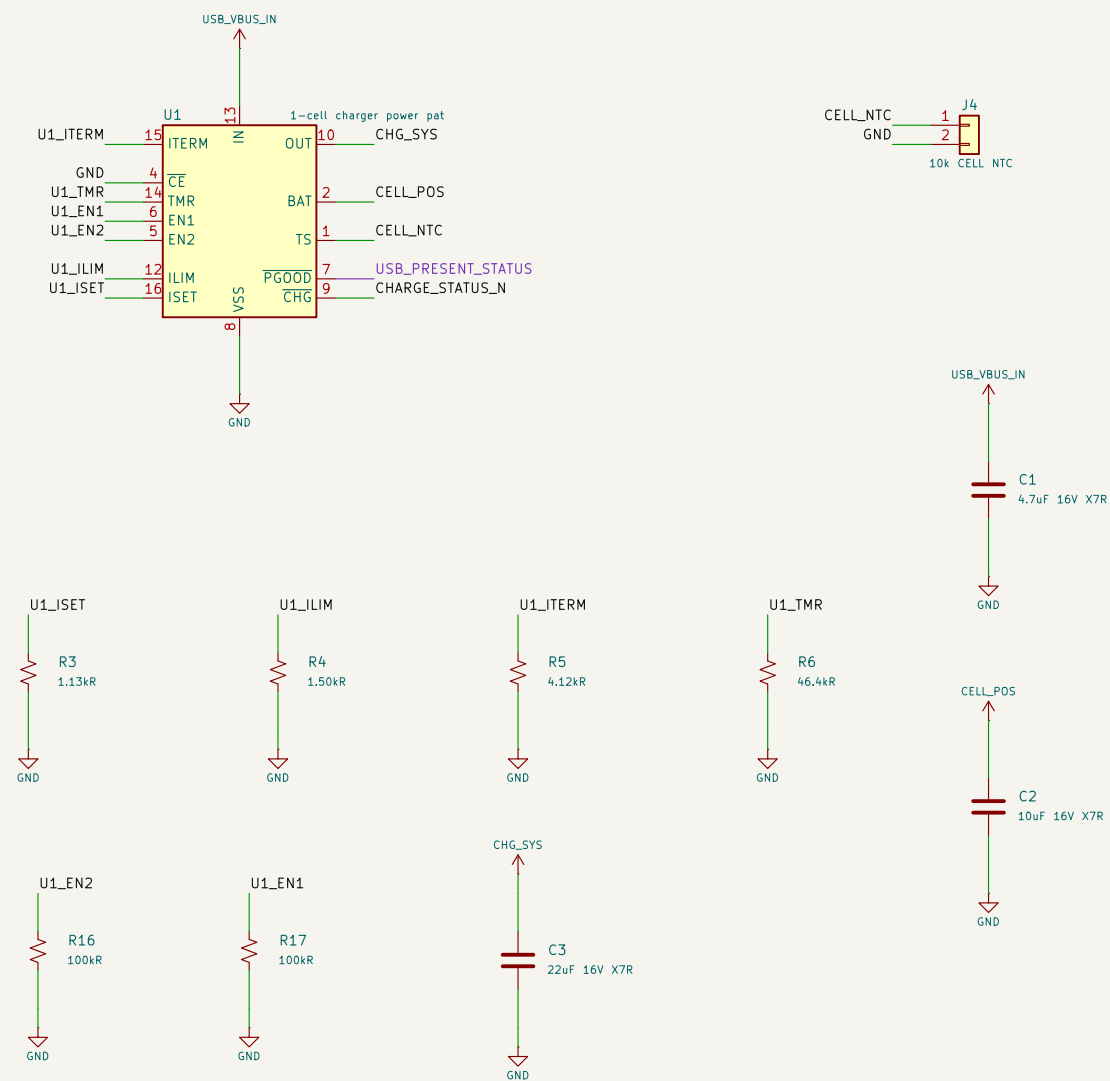


CELL PROTECTION / FUEL GAUGE

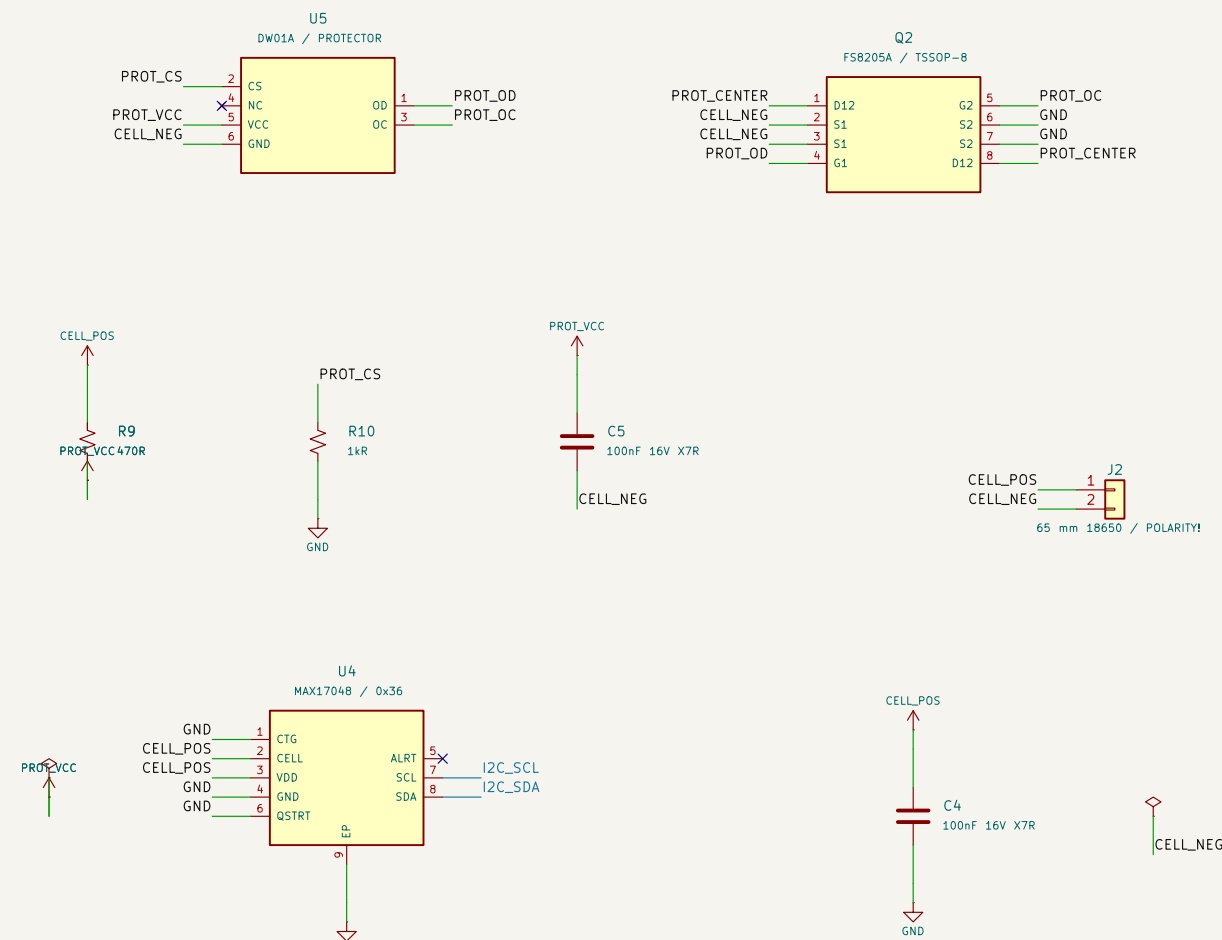


5 V BOOST / OUTPUT ENABLE

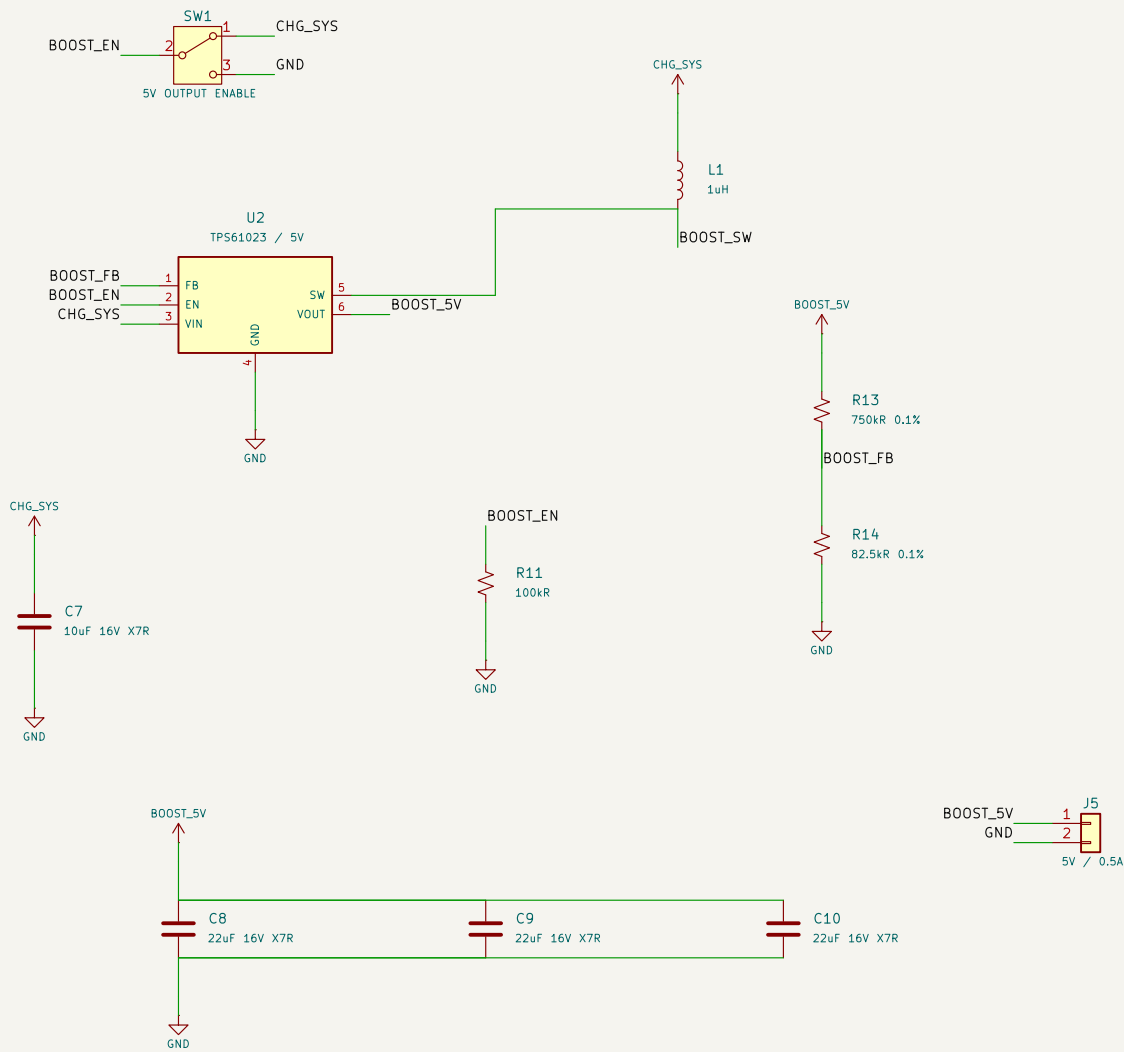

3.3 V BUCK-BOOST

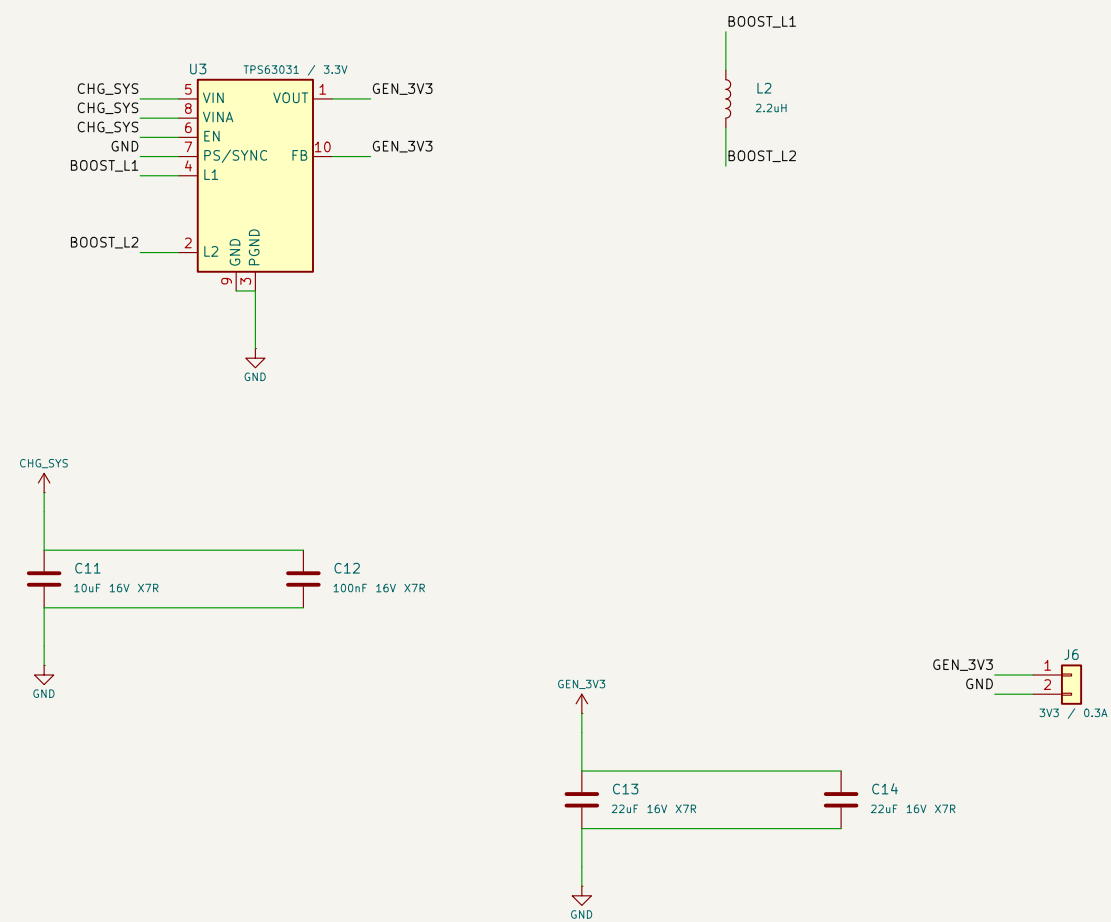

INPUT LIMIT CONTROL / I2C 0x21

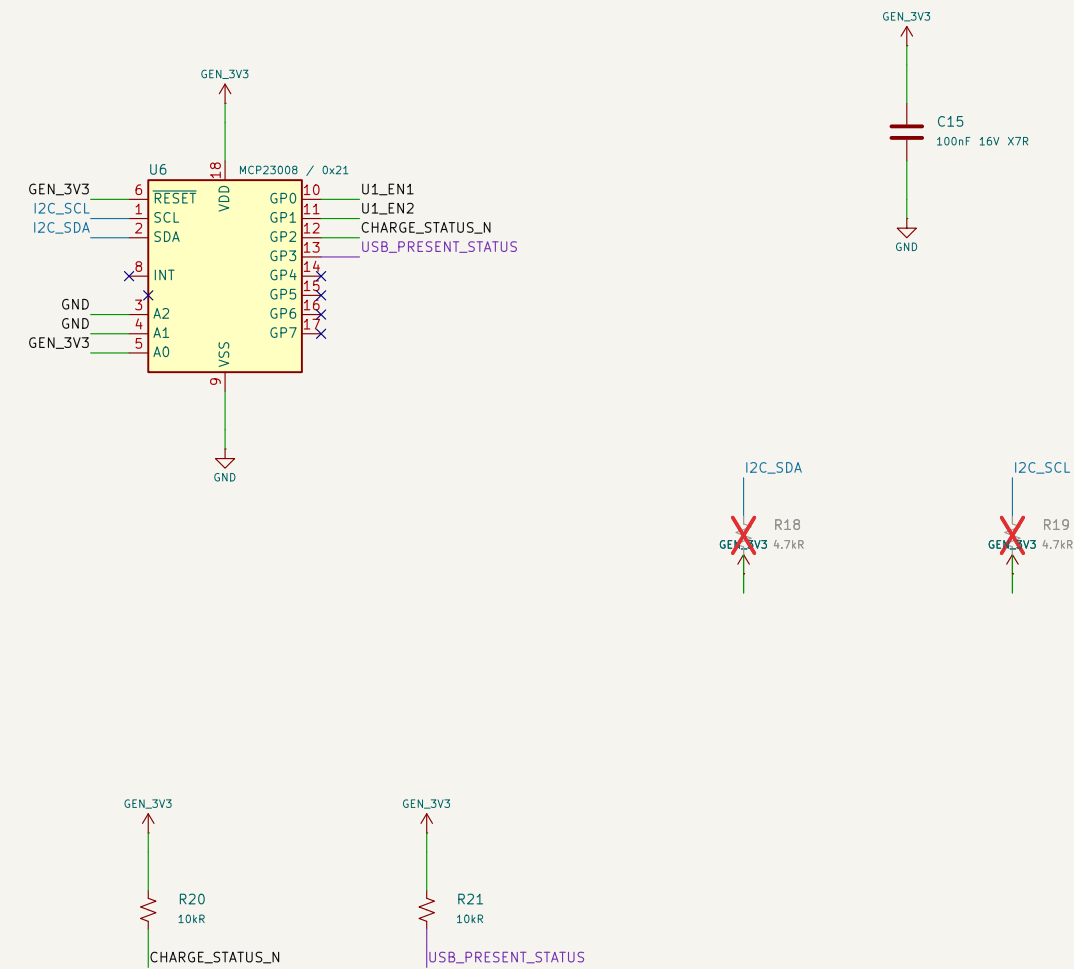

5 V and 3.3 V header limits share the cell/input power budget. No reverse-cell insertion protection.

Fuel gauge 0x36. Battery expander 0x21. R18/R19 DNP when connected to main board.

Verify release report before fabrication

Sheet: /
File: AQI_Battery.kicad_sch

Title: AQI Battery

Size: A2	Date: 2026-09-07
----------	------------------

Rev: A – ENGINEERING

Id: 1/1