



TFT top contact confirmed. One display and one PM sensor. Firmware and hardware validation required before release.


ESP32-C3 / PROGRAMMING

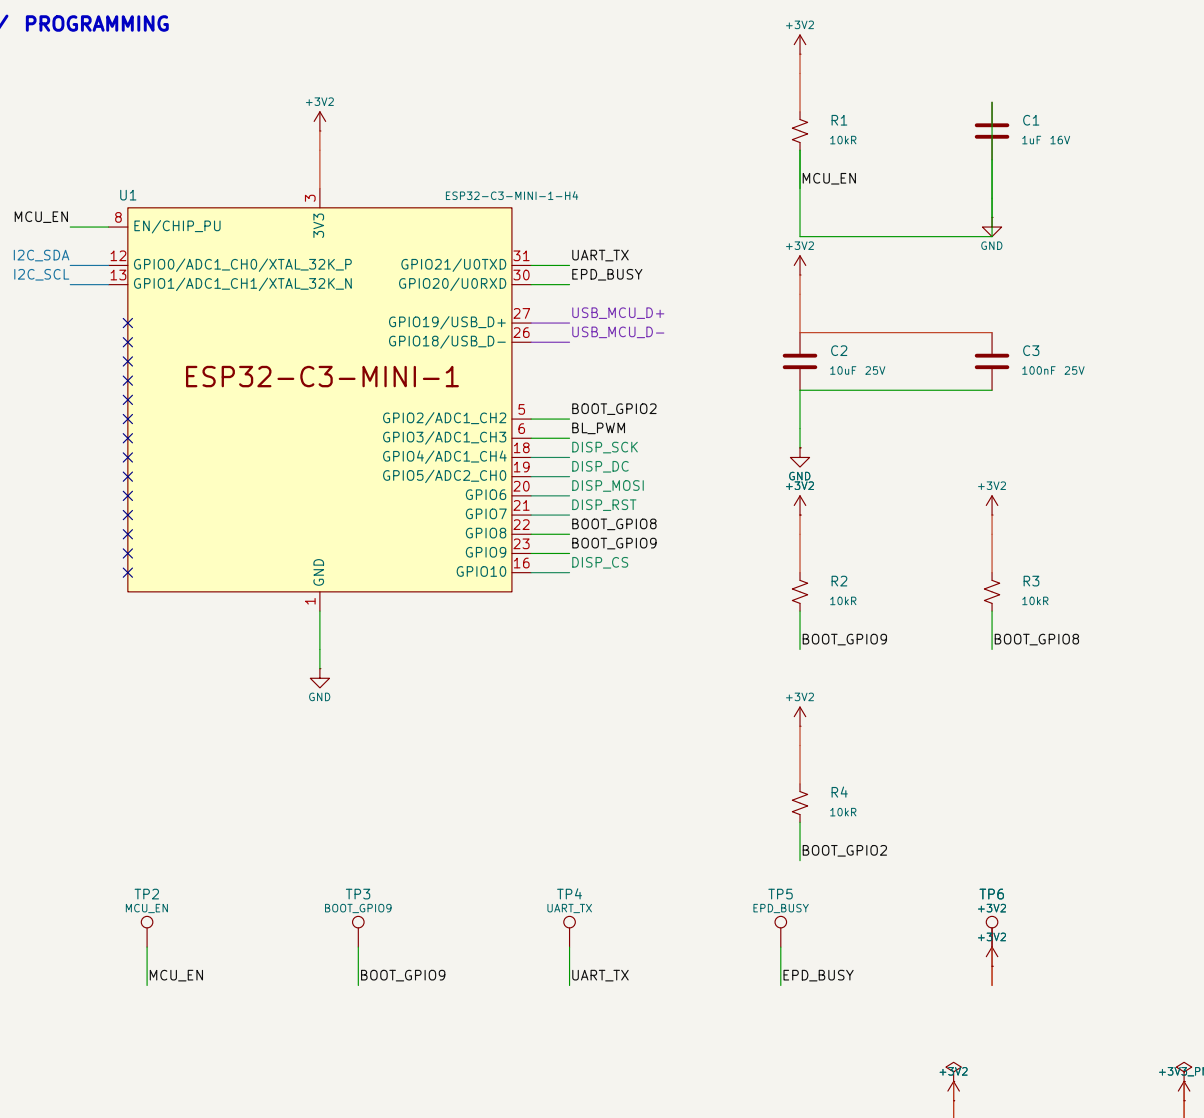


USB DATA + INTERNAL LINK

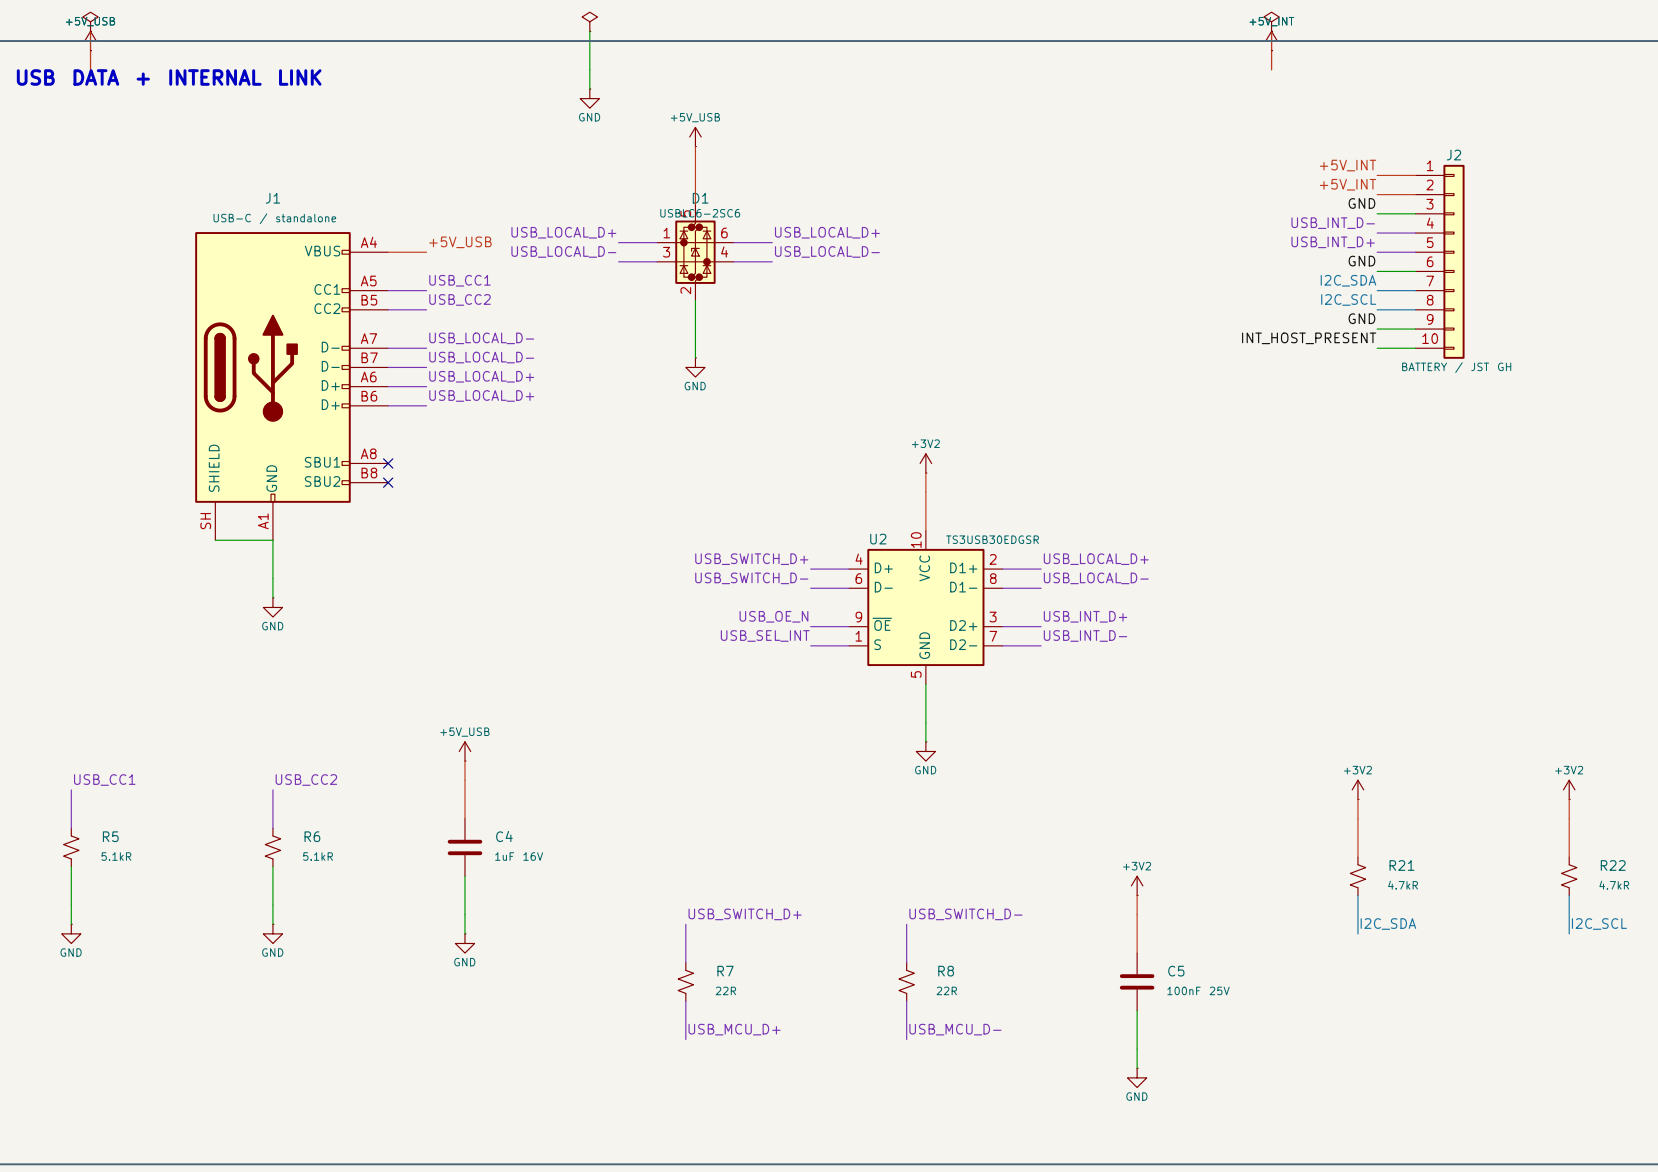


TFT + DIMMABLE BACKLIGHT

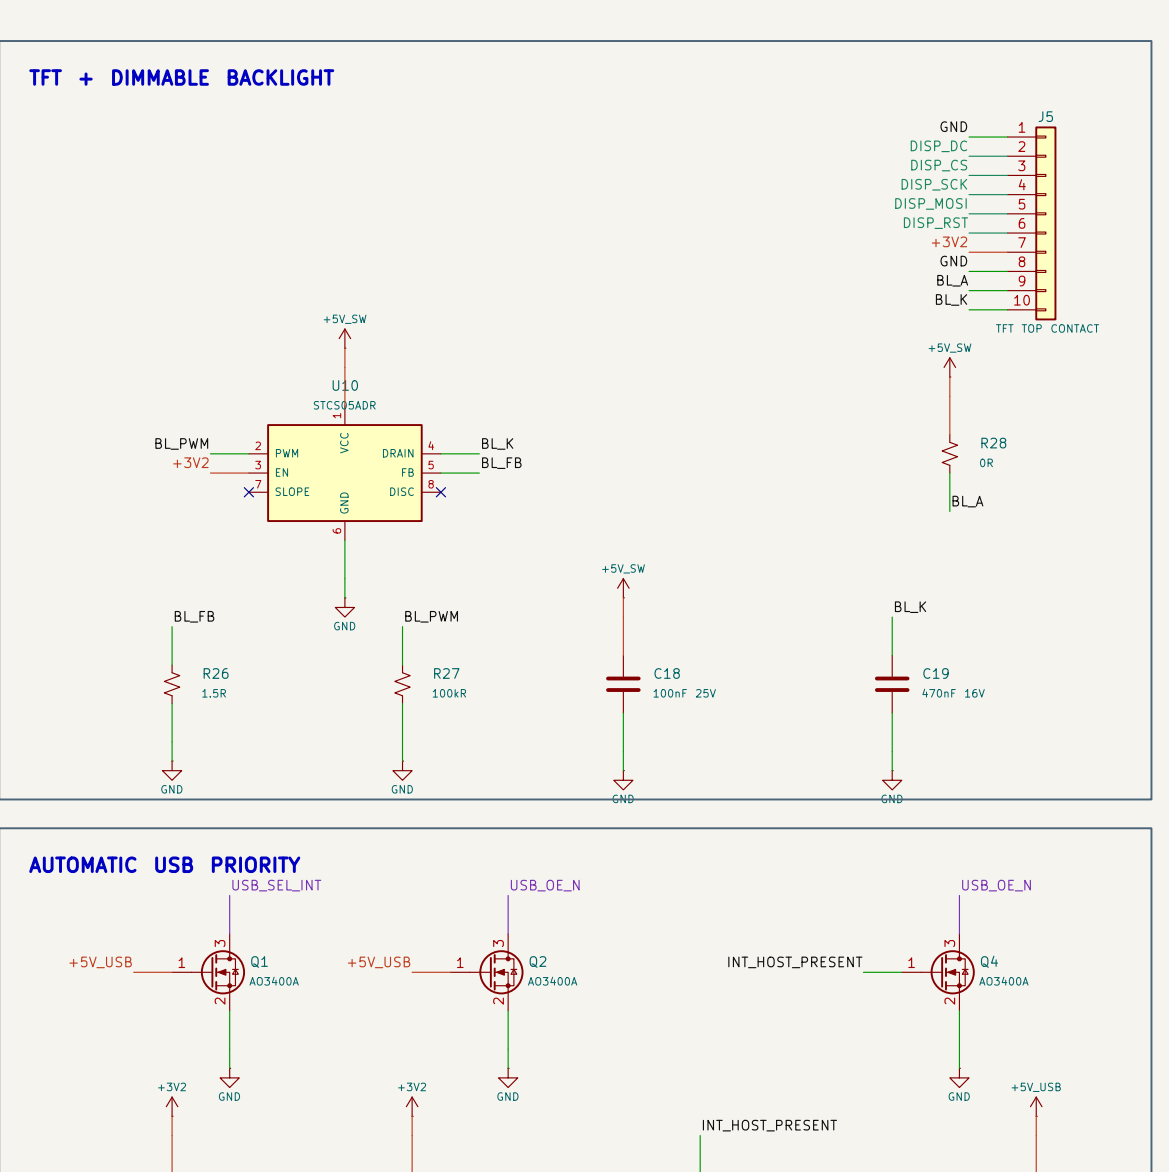


INPUT POWER + 3.2 V / 3.3 V

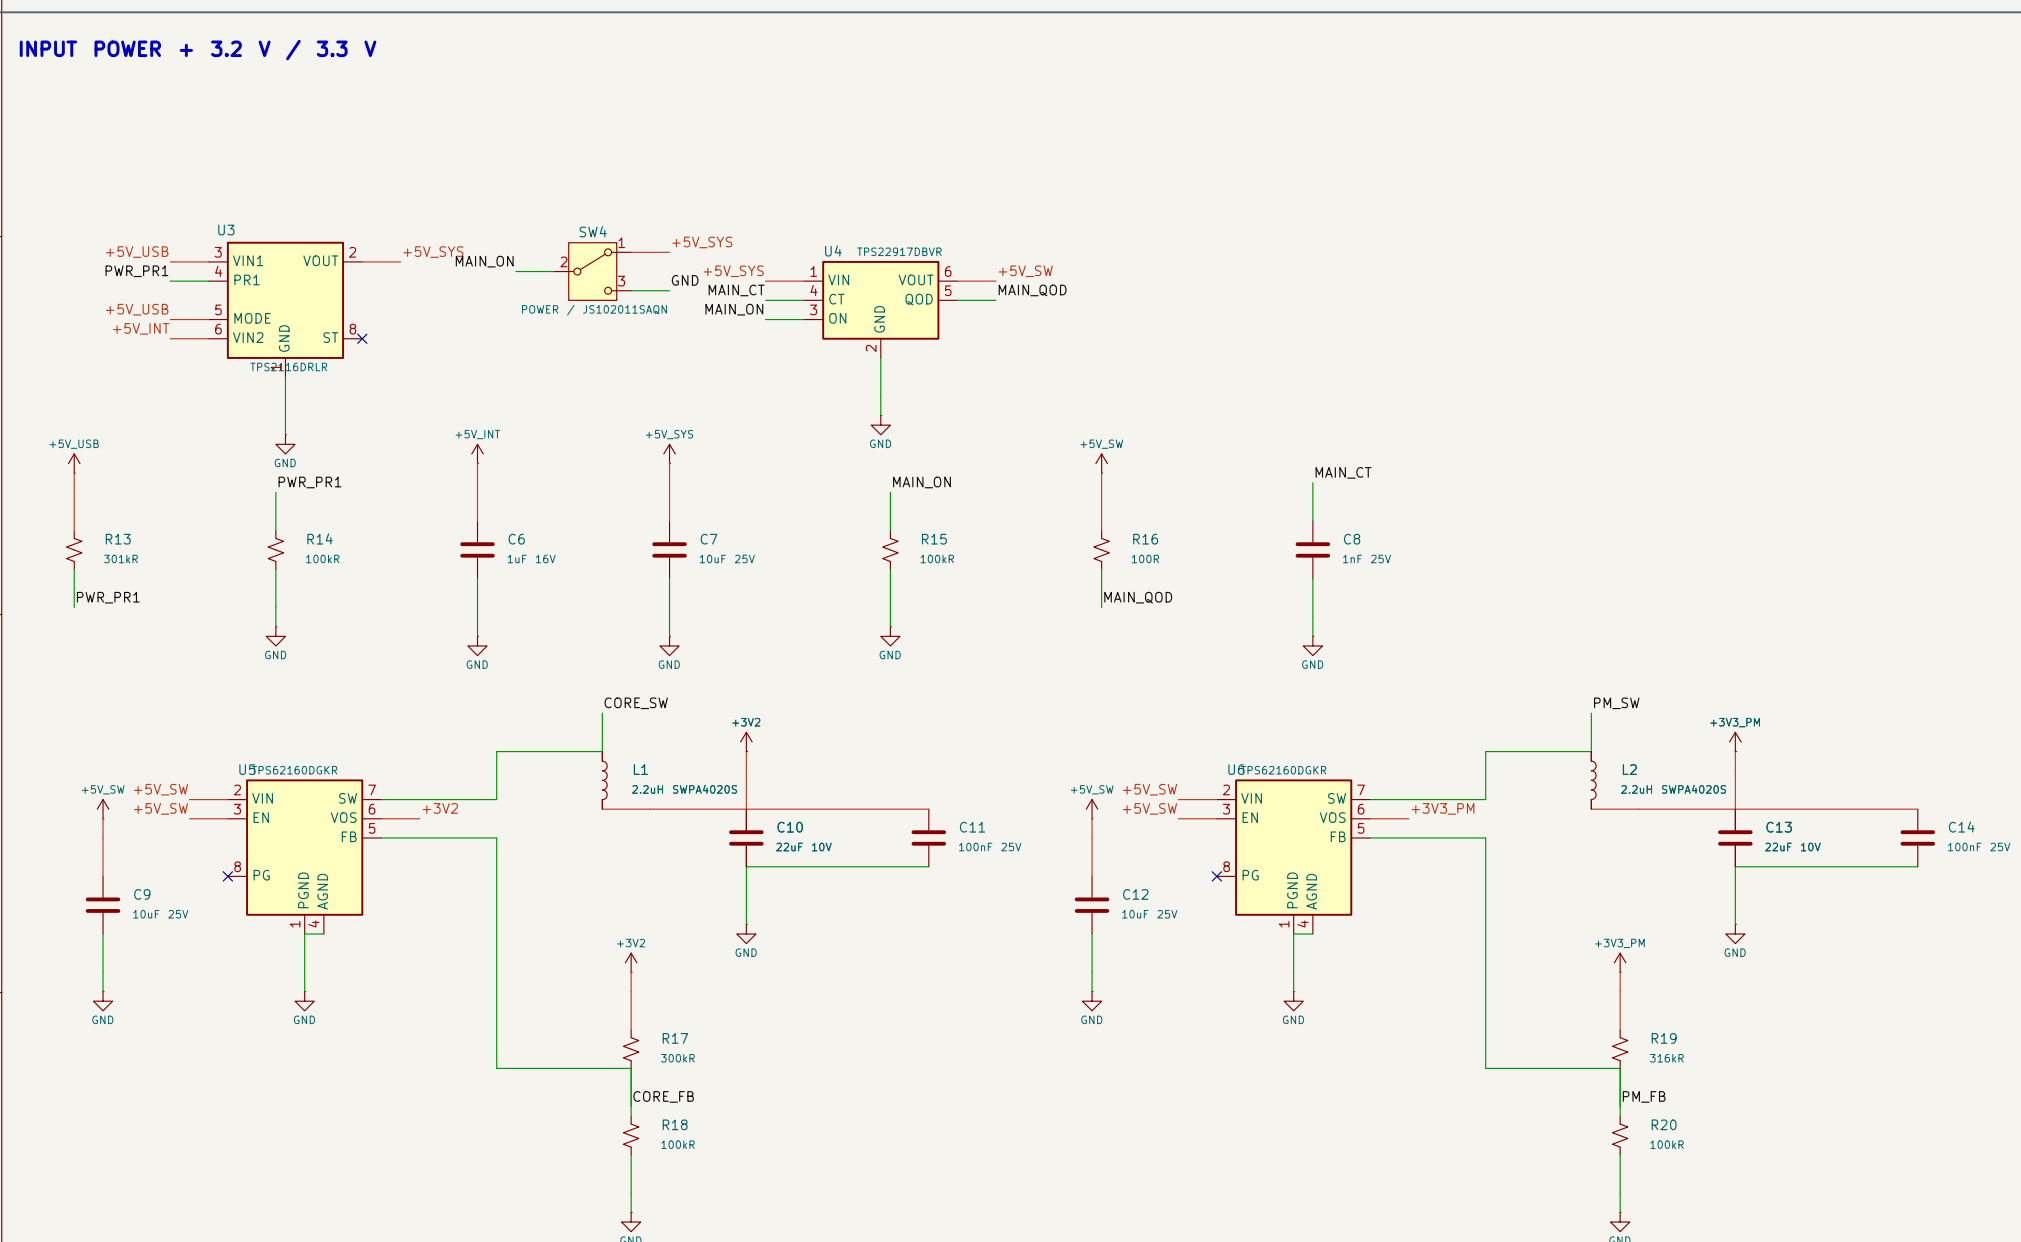


MCP23008 / I2C 0x20

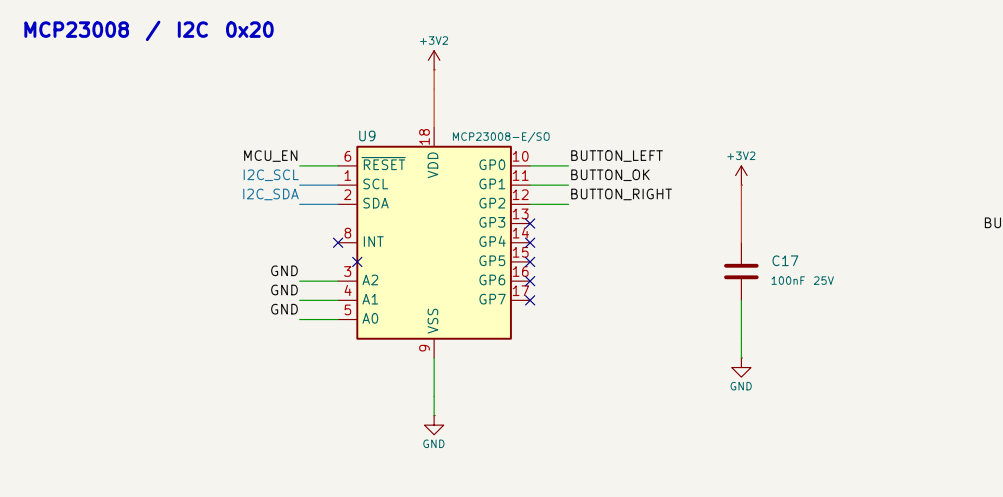


THREE FRONT BUTTONS

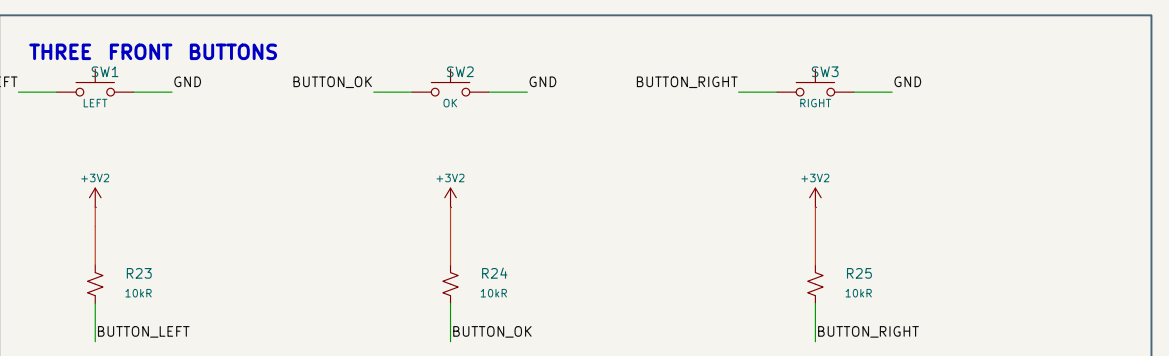

GDEY037T03 E-PAPER / ALTERNATE POPULATION

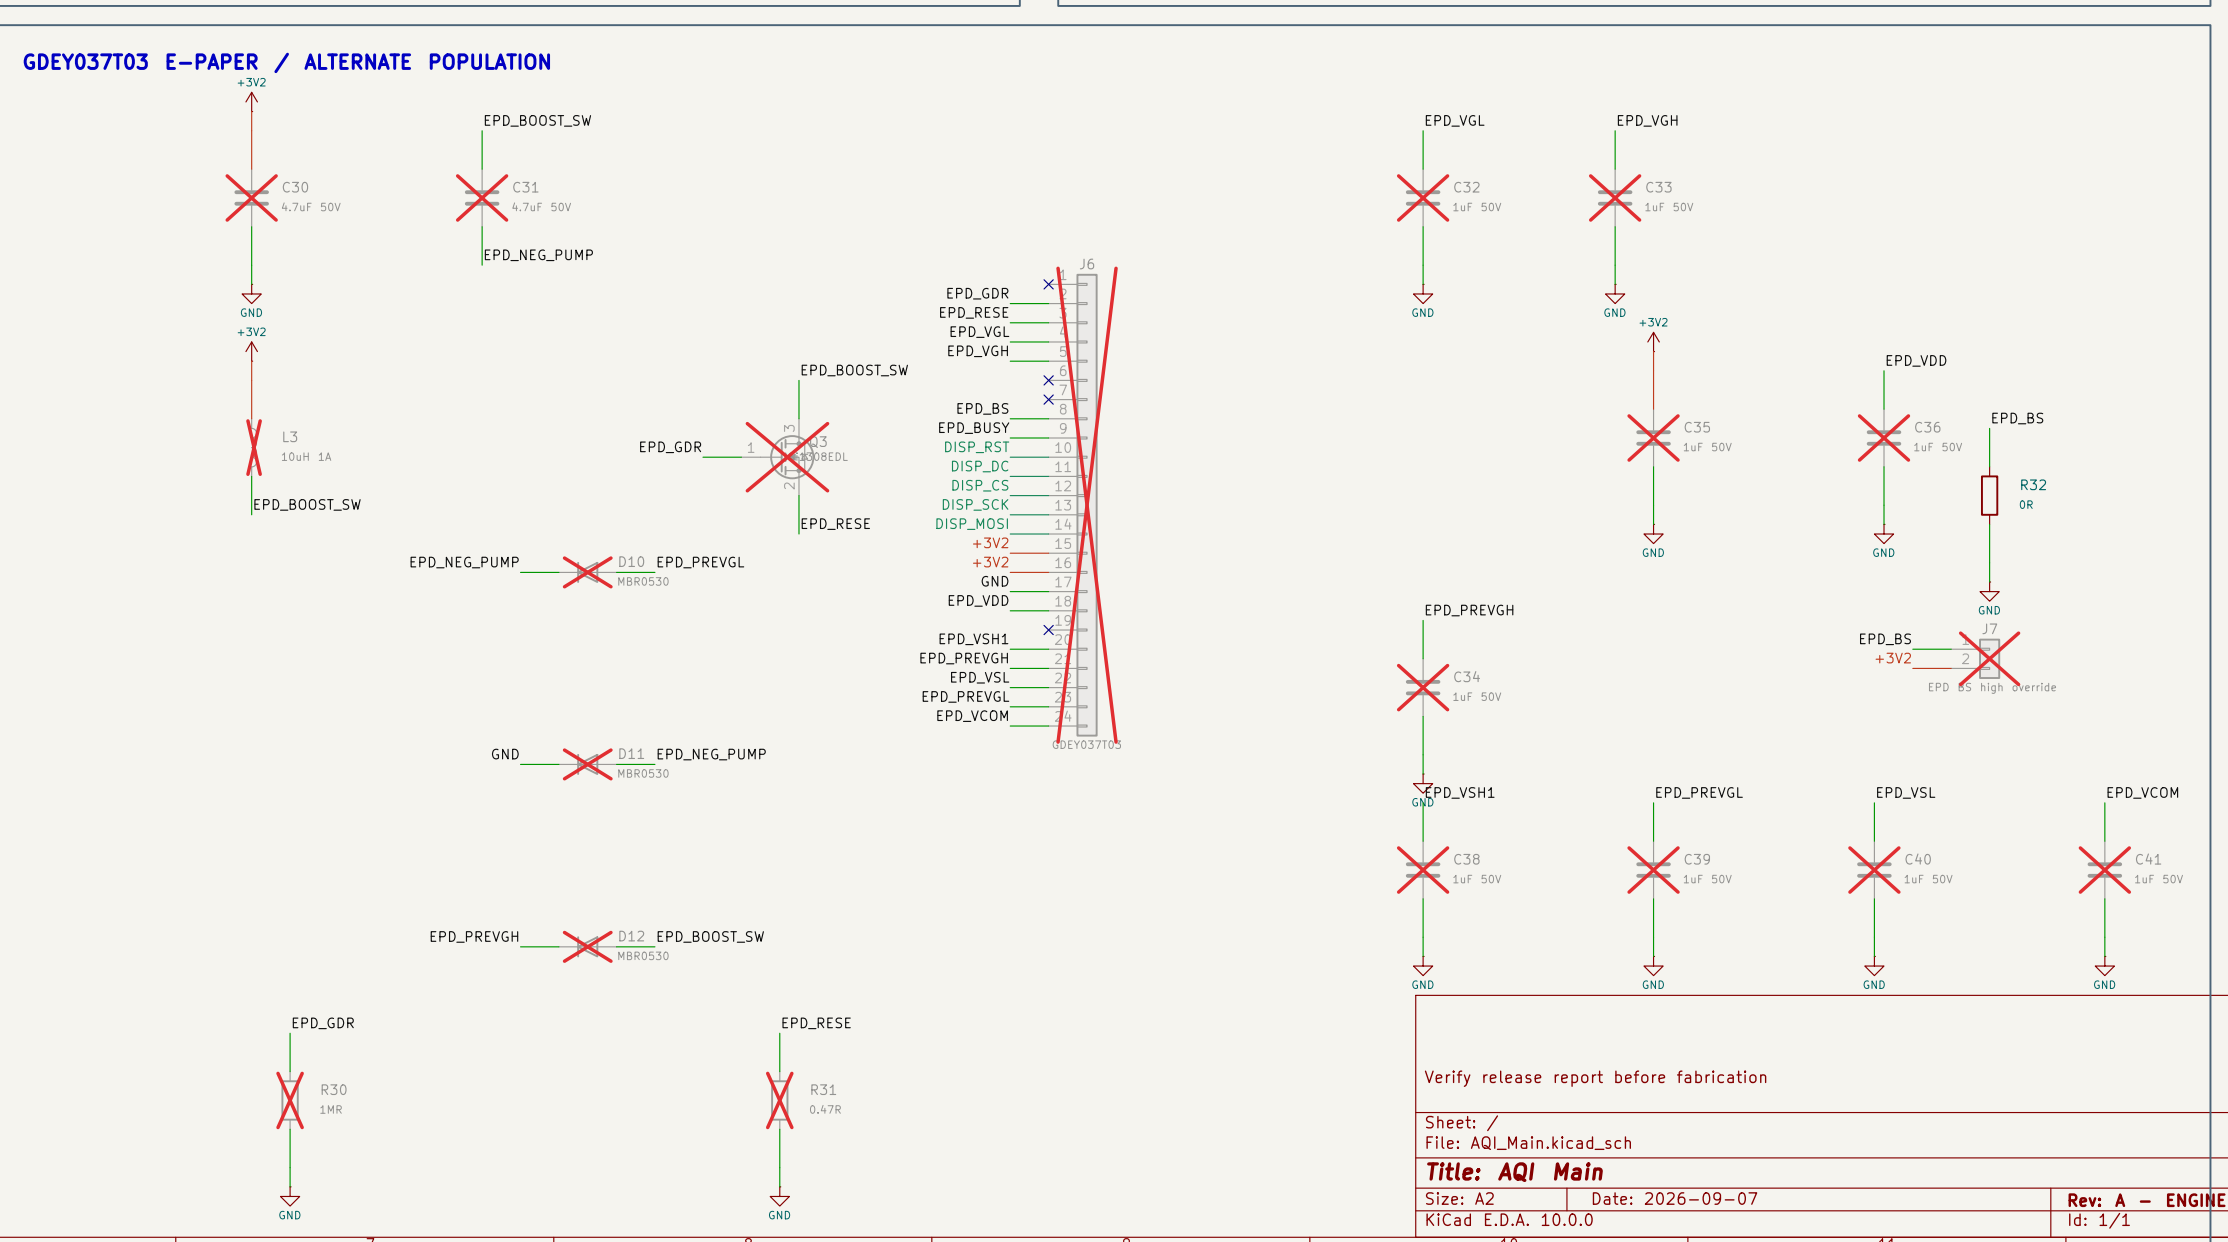

PM / OPTIONAL CO2

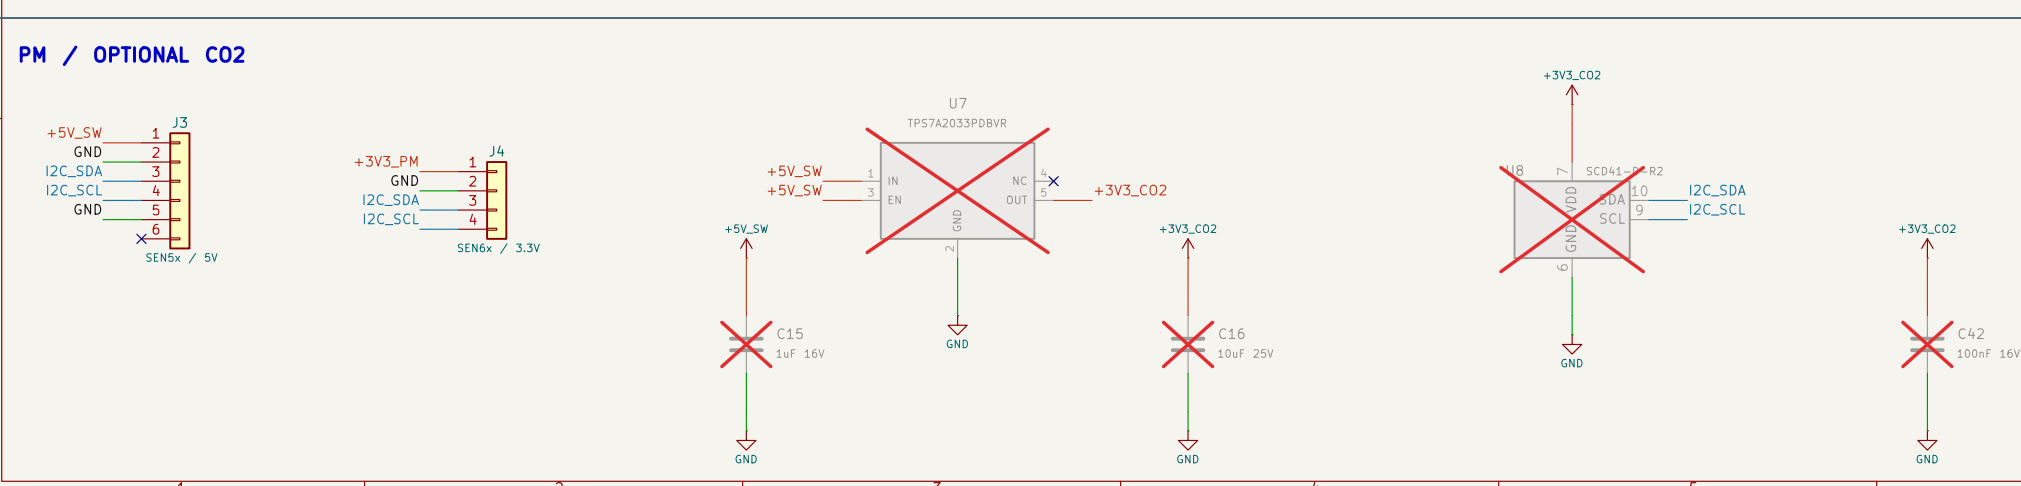

Verify release report before fabrication

Sheet: /
File: AQI_Main.kicad_sch

Title: AQI Main

Size: A2 Date: 2026-09-07

KiCad E.D.A. 10.0.0

Rev: A - ENGINEERING

Id: 1/1