COMPACT 18650 POWER / REV B ENGINEERING

2 layers / 26.2 x 88mm. 4.2V Li-ion only. 500mA / 1A / 1.5A nominal. No host or firmware required.

USB INPUT / source detection

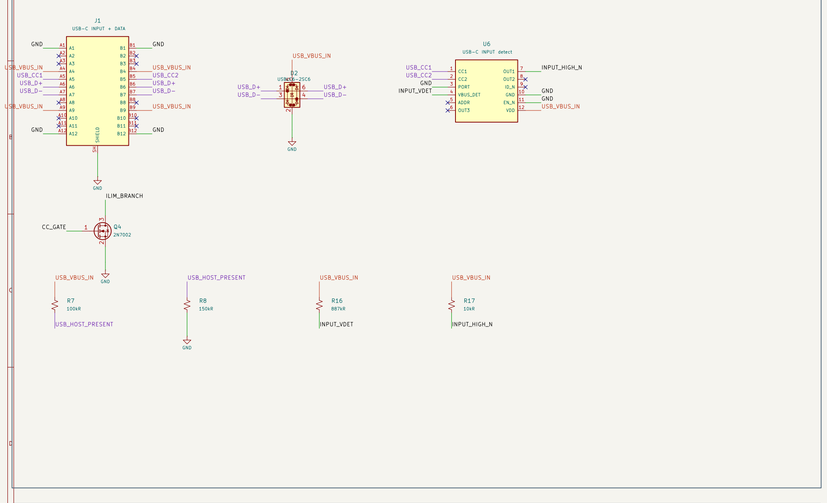

CHARGER / optional PCB temperature sensing

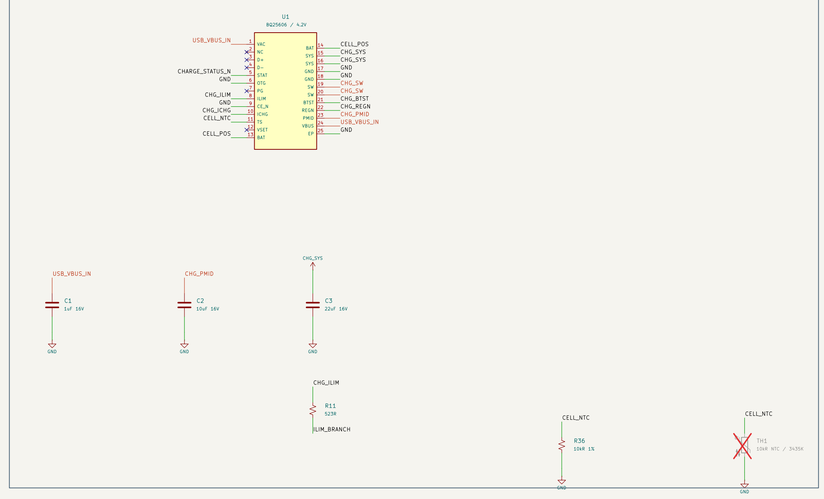

CHARGE RATE / recessed selector

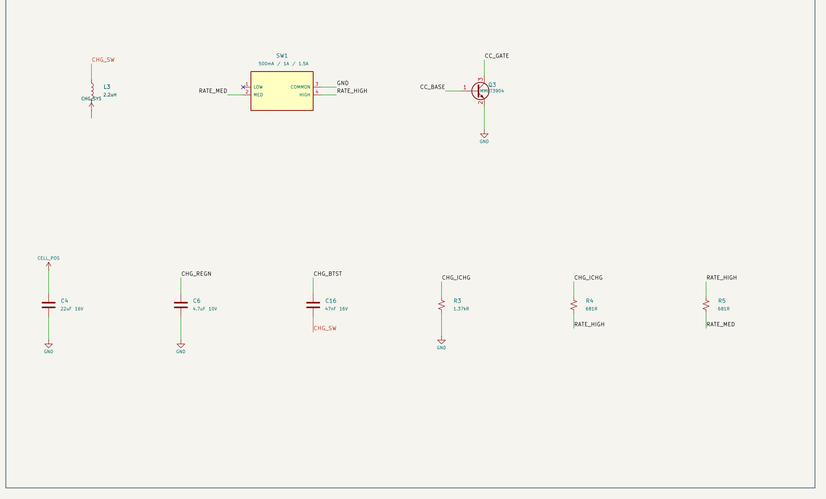

CELL / independent protection

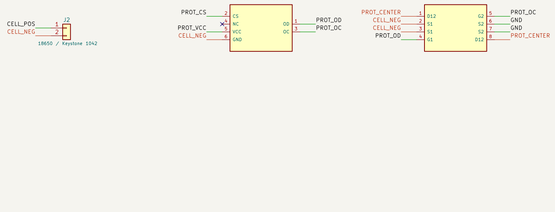

5V CONVERTER / shared 0.5A target

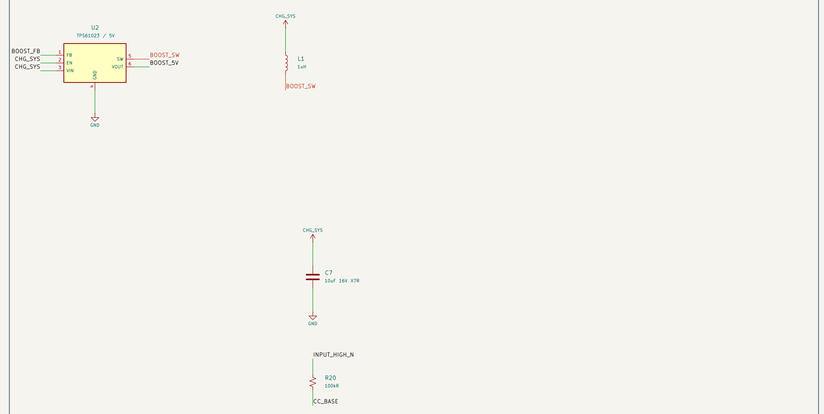

3.3V CONVERTER / 0.3A target

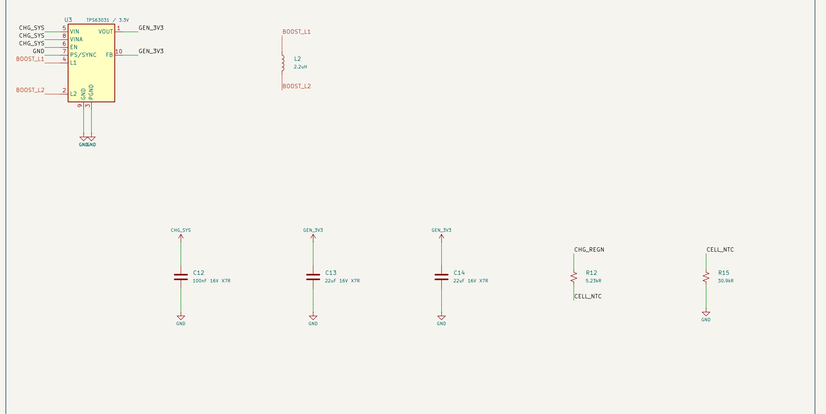

USB OUTPUT / attach and current limit

STANDALONE RGB / voltage estimate

OPTIONAL HOST / fuel gauge and USB

Verify release report before fabrication

Sheet: /
File: AQI_Battery_Compact.kicad_sch

Title: AQI Battery Compact

Size: A1	Date: 2026-09-09	Rev: B — ENGINEERING
KiCad E.D.A. 10.0.0		Id: 1/1