

FEATURES

- Fully Autonomous USB Type-C Port Controller
- Support USB Type-C Specification Reversion 2.1
- Source, Sink and DRP Port Role Configuration with Optional Accessory Support
- Try.SRC and Try.Snk Modes for User Configurations
- VDD Operating Range: 2.85 V to 5.5 V
- Multiple IO Voltage Support : 1.2 V, 1.8 V and 3.3 V
- Typical Low Power Operation: $I_{VDD_STBY} < 30 \mu A$
- GPIO Mode or Configurable I²C Mode
- Maximum 28 V DC Tolerance on ID, VBUS_DET, CC1 and CC2 Pins
- Dead Battery Support
- 4 kV HBM ESD Rating for USB IO Pins
- Small Package, 12 Lead QFN (1.6 mm x1.6 mm)

Tablets

Accessories

Industrial

Power Banks

GENERAL DESCRIPTION

The **HUSB320** is designed for a USB Type-C port. It integrates the CC logic detection and output the connection results per the different connection combinations. The **HUSB320** is freely to be configured by user as a Source, Sink or DRP. Additionally, the debug accessories and audio accessories are both supported to be recognized.

The **HUSB320** can run in two modes: I²C mode and GPIO mode. In I²C mode, an I²C master can access the **HUSB320** to configure the settings or read back status. While in GPIO mode, the configuration is achieved via the pins and the detection results are presented at these pins.

The ultra-low operation current of the **HUSB320** helps the system to reduce the total power dissipation and suitable for a battery application.

APPLICATIONS

Smartphones

TYPICAL APPLICATION CIRCUIT

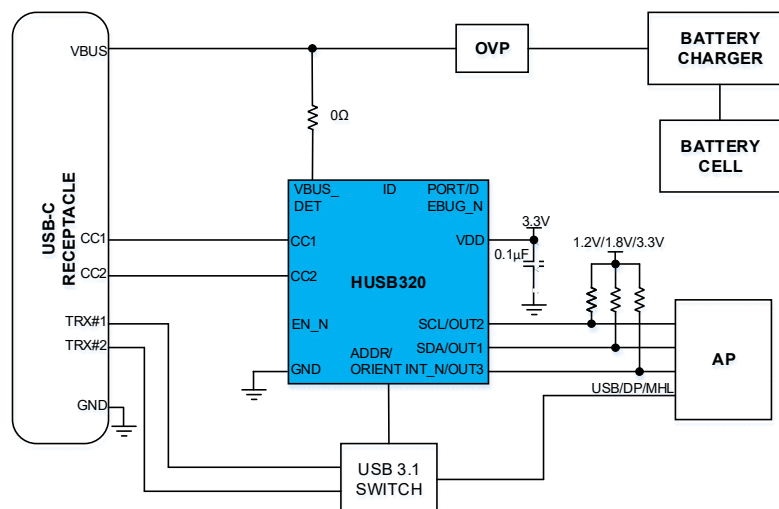


Figure 1. HUSB320-BA000-QN12R Typical Application Circuit