

Compressed air filters

WMF series

WMF high-efficiency coalescing filters remove oil, dirt, odour and water from compressed air, protecting everything installed downstream. Colour-coded elements in four grades build up air quality to ISO 8573-1.



Capacity	Grades	Finest filtration	Max. operating pressure
40 to 1700 CFM	GP · ZP · ZO · ZC	0.01 micron, 0.005 mg/m³ oil	30 bar g

Inside this catalogue

Models & rating conditions	2	How it works & construction	3
Selection & applications	4		



Specifications online

Layout edition 2026-10 · Product-range information. Confirm the selected model and duty with Win Equipments before ordering.

Models & rating conditions

Rating conditions

Air quality	To ISO 8573-1	Max. operating temperature	80 °C
Element change at	0.7 bar g differential	Accessories	Differential pressure gauge · automatic drain valve

Capacity & operating data

Model	Capacity CFM	Capacity m³/hr	Connection BSP
WMF 004	40	68.5	½"
WMF 007	50	80	½"
WMF 010	75	120	¾"
WMF 018	125	210	1"
WMF 030	200	335	1½"
WMF 047	310	510	2"
WMF 070	450	750	2"
WMF 094	600	1000	3"
WMF 150	900	1500	4"
WMF 175	1200	2040	5"
WMF 240	1700	2760	6"

- Each model is available in GP, ZP, ZO and ZC grades. Order as model + grade, e.g. WMF 030 ZO.
- Working pressure 7 to 30 kg/cm².

Filter grades

Grade	Particles	Oil carry-over	Clean pressure drop	Media	Efficiency	ISO 8573-1
GP	3 micron	—	0.03 bar g	Polypropylene	—	Particle class 3 · oil class 5
ZP	0.1 micron	0.1 mg/m³	0.05 bar g	Borosilicate	99%	Particle class 1 · oil class 3
ZO	0.01 micron	0.01 mg/m³	0.06 bar g	Borosilicate	99.99%	Particle class 1 · oil class 2
ZC	0.01 micron	0.005 mg/m³	0.12 bar g	Borosilicate with impregnated activated carbon	99.9999%	Particle class 1 · oil class 1


How it works & construction

How it works

Filters are installed in series so each grade protects the next and the air reaches the class your process needs.

- | | |
|---|---|
| <p>1 GP
General purpose: removes particles down to 3 micron ahead of the dryer.</p> | <p>2 ZP
Removes particles to 0.1 micron and oil to 0.1 mg/m³.</p> |
| <p>3 ZO
High-efficiency coalescing to 0.01 micron and 0.01 mg/m³ oil.</p> | <p>4 ZC
Activated carbon removes oil vapour and odour to 0.005 mg/m³.</p> |

Typical compressed air installation

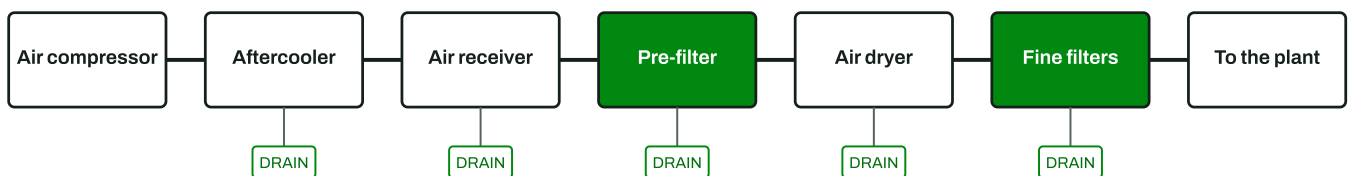

Typical arrangement only. Confirm filtration sequence and condensate handling for your application.

Construction & features

Body

- Aluminium body
- Condensate level indicator
- Internal automatic drain and manual drain

Monitoring

- Differential pressure indicator
- Differential pressure gauge accessory

Elements

- Colour-coded per grade
- Polypropylene or borosilicate media
- Change at 0.7 bar g differential

Selection & applications

Applications: Instrument air · Paint shops · Food & beverage · Pharmaceutical · Electronics · Textile · General plant air

Which filter grade do I need?

Use GP (3 micron) as a pre-filter, ZP (0.1 micron) for general protection, ZO (0.01 micron, 0.01 mg/m³ oil) for high-quality air, and ZC (activated carbon) where oil vapour and odour must be removed.

What pressure can WMF filters handle?

All grades are rated to a maximum operating pressure of 30 bar g and 80 °C.

When should elements be replaced?

Replace the element when the differential pressure reaches 0.7 bar g.

Confirm your selection

Send the model, required capacity, operating temperatures, pressure and site conditions. For a model-specific datasheet or GA drawing, include your installation requirement.

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur, Arasur Post,
Coimbatore 641 407, Tamil Nadu, India
+91 95972 28969 · +91 95972 28975
info@winequipments.com
winequipments.com

Catalogue values are for product selection. Confirm duty, materials, connections and final dimensions with Win Equipments before ordering. Layout edition 2026-10.