

## AUTOMATIC DRAIN VALVE

**WDV**  
*Services*



Medium Discharge Type

High Discharge Type

Micro Mini Controller Type

Mechanical Float Type

No Air Loss Type

Working Pressure Range : 3 to 70 bar g

Max. Condensate temperature : 1 to 90 deg c

Adjustable timer : 1 Min to 120 min



## Working Principle


Drain valves are at the air system without losing excessive compressed air without shutting down the crucial part of the compressed air system. Condensate drain valves remove condensate from system. The entrainment condensate along with air flow in compressed air system to end use applications are extremely harmful, if system not drained regularly. Even the smallest compressed air system can produce large quantities of condensate which contains oil & water. Removing condensate from any compressed air system is very much important. An automatic drain valve is the right solution to eliminate this effect. Win offers wide range of automatic condensate drain valves with electronic timer based, electronic no loss type and mechanical float type technologies suitable for various site conditions.

## Technical Specification

| Model Description        | UoM                 | WDV M12                                            | WDV H12          | WDV L40          | WDV H40          | WDV B16          | WDV E16          | WDV ZA16         | WDV F16       |
|--------------------------|---------------------|----------------------------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|---------------|
| Type                     | -                   | Electronic Timer                                   | Electronic Timer | Electronic Timer | Electronic Timer | Electronic Timer | Micro controller | Electronic Timer | No air loss   |
| Max. operating Pressure  | Kgf/cm <sup>2</sup> | 16                                                 | 16               | 40               | 40               | 16               | 16               | 16               | 16            |
| Capacity                 | cfm                 | upto 50                                            | 51 to 500        | upto 50          | 51 to 500        | 500 to 1000      | upto 500         | upto 1000        | upto 1000     |
| Electrical Supply        | Volt                | (230V AC (24V, 48V, 110V AC or DC as per Customer) |                  |                  |                  |                  |                  | 230V AC          | NA            |
| Input Temperature        | Deg C               | Upto 90 Deg C                                      |                  |                  |                  |                  |                  |                  |               |
| Protection               |                     | IP55 or IP 65                                      |                  |                  |                  |                  |                  |                  |               |
| Valve operating Interval | min                 | 1-120                                              | 1-136            | 1-120            | 1-136            | 1-120            | 0.5-45           | 1-120            | NA            |
| Valve Discharge          | sec                 | 8 sec                                              | 4                | 8 Sec            | 4                | 4                | 0.5-10           | 8                | NA            |
| Pilot Operated           | BSP                 | NA                                                 | 1/8"             | NA               | 1/8"             | 1/8"             | NA               | 1/8"             | NA            |
| Inbuilt Strainer         |                     | Yes                                                | NA               | NA               | NA               | NA               | Yes              | NA               | NA            |
| End Connection           | BSP                 | 1/2"                                               | 1/2"             | 1/2"             | 1/2"             | 1"               | 1/2"             | 1/2"             | 1/2"          |
| Material of Construction | MoC                 | Cast Aluminum                                      | Cast Aluminum    | SS               | SS               | Cast Aluminum    | Brass            | Cast Aluminum    | Cast Aluminum |
| Weight                   | Kgs                 | 0.9                                                | 1.25             | 0.9              | 1.25             | 2.45             | 0.5              | 3.0              | 1.0           |

\*7 to 16 Kgf/cm<sup>2</sup> (\* optional 40 Kgf/cm<sup>2</sup> & 70 Kgf/cm<sup>2</sup>)

## Typical Installation

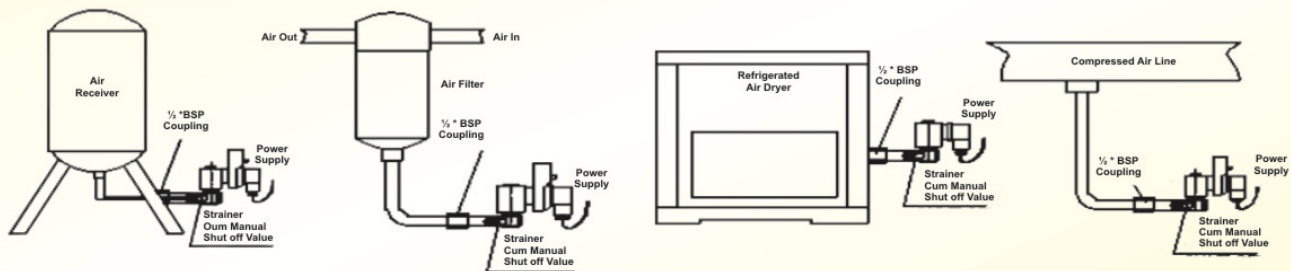

## Advantages

- Moistures & Oil carry over to Pneu.Items
- Discharge high Velocity w/o Clogging
- Less Maintenance
- Non Corrosive Materials
- Increased efficiency of pneumatic equipments
- No power Required in Float Type



Manufacturers :

### WIN EQUIPMENTS

# 106 B, S.N.R College Road, K.R.Puram, Coimbatore,  
TN – 641 006, INDIA.  
m: +91 9597 228 969  
e: info@winequipments.com, URL : www.winequipments.com  
hot line: +91 9597 228 975



Specifications are subject to change due to up gradation in all industries

Authorized Dealer :