


Capacity : 300 cfm to 2000 cfm
Working Pressure : 7 bar g to 12.5 bar g
Inlet Temperature : 45 deg c
Atmospheric Dew point : - 40 deg c
cycle time : 10 mins



- › Cycle failure indication*.
- › Sized to save heat of adsorption - minimises purge air usage.
- › Limited velocities through tower prevent bed fluidization-stops desiccant dusting.
- › Large desiccant bed - ensures sufficient contact time to produce- 40°dew point. Molecular sieves for - 60°C.
- › Uses bulk desiccant - no special cartridges required.
- › Can be offered for higher pressure and lower dew points also.
- › Heavy duty purge exhaust mufflers for quiet operation.
- › Non-lubricated inlet control valves.
- › Purge flow valve for adjusting purge rate.
- › Pressure relief valves on both towers

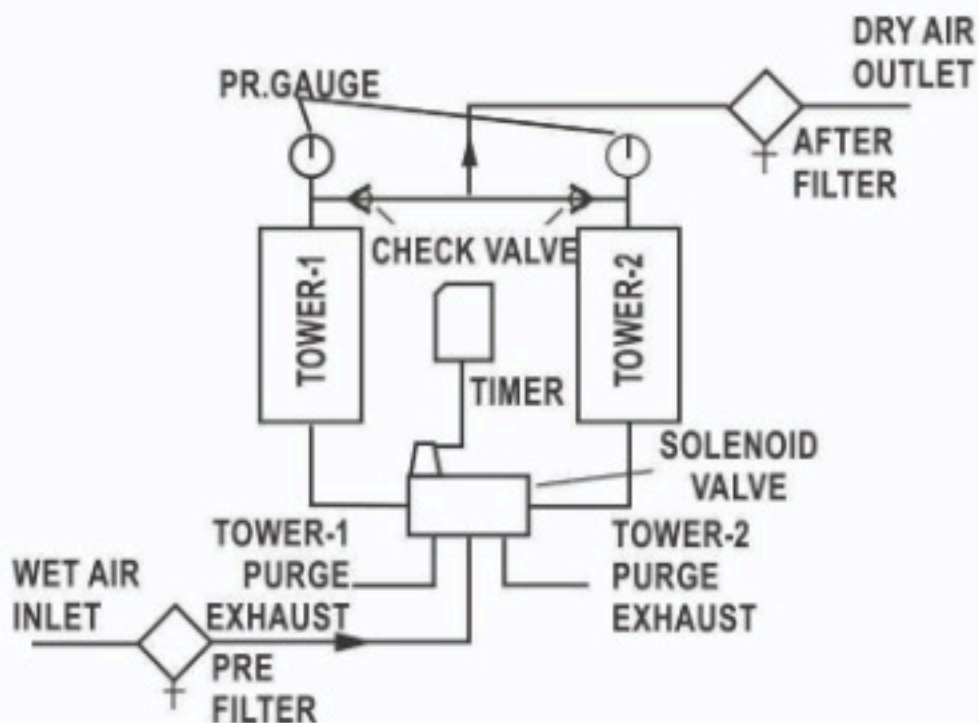

Cooling Towers



C.A.Filters



Auto Drain Valves

*Specifications are subject to change due to up gradation in all industries

Authorized Channel Partner :

Ma

W
SF
Ar
m
e: