



WDV Series

Automatic Condensate Drain Valves

Even a small compressed air system produces large quantities of condensate laced with oil. WDV automatic drain valves discharge it from receivers, filters, dryers and pipelines without shutting the system down and without wasting compressed air.

Types

Electronic timer · micro-controller · no air loss · float

System capacity

Up to 1000 CFM

Working pressure

Up to 16 kgf/cm² (40 and 70 optional)

Condensate temperature

Up to 90 °C

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur, Arasur Post, Coimbatore 641 407, Tamil Nadu, India
+91 95972 28969 · +91 95972 28975 · info@winequipments.com




Full model range,
photos and
sizing tools




WORKING PRINCIPLE

How it works

Condensate carried with the air to end-use points is harmful if the system is not drained regularly. An automatic drain removes it without losing excessive compressed air and without shutting down the system.

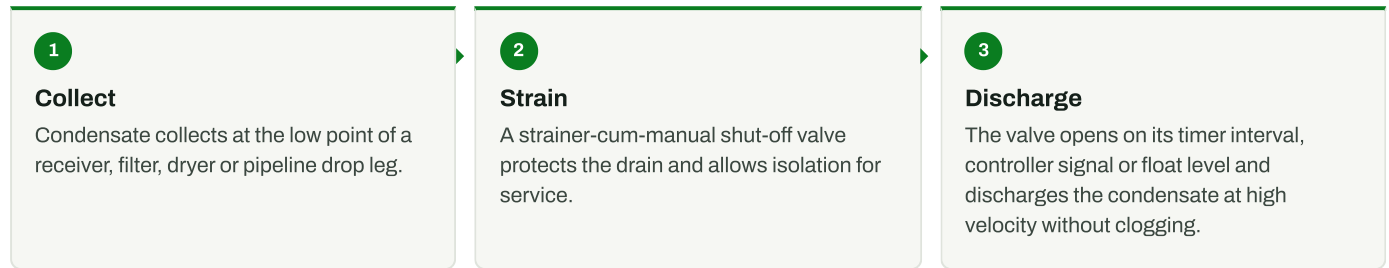

TYPICAL INSTALLATION

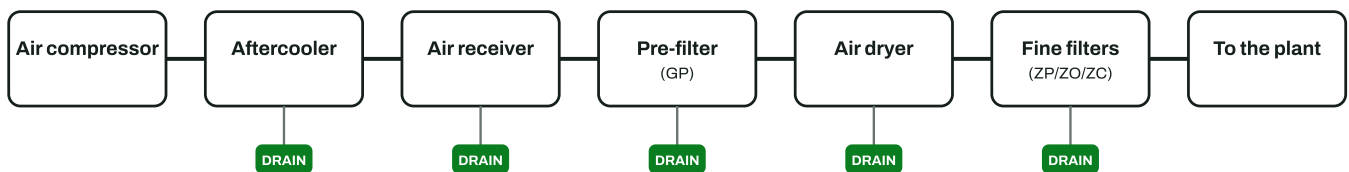

CONSTRUCTION

Features

Electronic timer

- Adjustable interval and discharge time
- Cast aluminium or stainless steel body
- High-pressure 40 kgf/cm² versions

Micro-controller

- 0.5–45 min interval, 0.5–10 s discharge
- Brass body, built-in strainer

No air loss

- Discharges condensate only
- No power required in float type

TECHNICAL SPECIFICATIONS

WDV Series models

Rating conditions

Timer range 1 to 120 min (model dependent)	Protection IP55 or IP65	Supply 230 V AC; 24 V, 48 V, 110 V AC or DC to order	Pressure range 3 to 70 bar g across the range
--	-----------------------------------	--	---

Model	Type	Capacity CFM	Max. operating pressure kgf/cm²	Valve interval min	Discharge time s	Pilot operated BSP	Built-in strainer	End connection BSP	Material	Supply	Weight kg
WDV M12	Electronic timer	Up to 50	16	1–120	8	NA	Yes	½"	Cast aluminium	230 V AC*	0.9
WDV H12	Electronic timer	51–500	16	1–136	4	⅛"	NA	½"	Cast aluminium	230 V AC*	1.25
WDV L40	Electronic timer	Up to 50	40	1–120	8	NA	NA	½"	Stainless steel	230 V AC*	0.9
WDV H40	Electronic timer	51–500	40	1–136	4	⅛"	NA	½"	Stainless steel	230 V AC*	1.25
WDV B16	Electronic timer	500–1000	16	1–120	4	⅛"	NA	1"	Cast aluminium	230 V AC*	2.45
WDV E16	Micro-controller	Up to 500	16	0.5–45	0.5–10	NA	Yes	½"	Brass	230 V AC*	0.5
WDV ZA16	Electronic timer	Up to 1000	16	1–120	8	⅛"	NA	½"	Cast aluminium	230 V AC	3.0
WDV F16	No air loss	Up to 1000	16	NA	NA	NA	NA	½"	Cast aluminium	Not required	1.0

- › Input temperature up to 90 °C. Protection IP55 or IP65.
- › * 230 V AC standard; 24 V, 48 V, 110 V AC or DC as per customer.
- › Standard 7 to 16 kgf/cm²; 40 and 70 kgf/cm² optional.

APPLICATIONS

Air receivers

Compressed air filters

Refrigerated air dryers

Compressed air lines

Moisture separators

FROM OUR WORKS



Automatic drain valve, low discharge

QUESTIONS

Which drain valve suits my system?

Use WDV M12 or L40 up to 50 CFM, H12 or H40 from 51 to 500 CFM, and B16, ZA16 or F16 up to 1000 CFM. Choose the 40-series for pressures up to 40 kgf/cm².

Can I get a low-voltage version?

Yes. Standard supply is 230 V AC; 24 V, 48 V and 110 V AC or DC versions are available to order.

What is a no-air-loss drain?

The WDV F16 discharges only condensate, so no compressed air is wasted, and it needs no electrical supply.

Talk to an engineer

Send your compressor capacity, heat load or water flow, operating pressure, temperatures and site conditions. We reply with a recommended model and quotation.

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur
Arasur Post, Coimbatore 641 407
Tamil Nadu, India

+91 95972 28969 · +91 95972 28975

WhatsApp +91 95972 28969
info@winequipments.com ·
winequipments.com



ISO 9001:2015 certified. Specifications are as per our catalogue and are subject to change without notice; confirm the selection with our engineers before ordering. Issued October 2026.