



WCC Series

Coil Cooling Towers (Dry Coolers)

A coil cooling tower cools process hot water inside a sealed finned-coil heat exchanger, so the water never touches the air. WCC units are built for diesel genset jacket water and other closed loops, cooling water to ambient + 4 °C.

Capacity

40 to 280 TR

Diesel genset duty

150 to 2000 kVA

Inlet water temperature

75 to 90 °C

Outlet water

Ambient + 4 °C

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur, Arasur Post, Coimbatore 641
407, Tamil Nadu, India
+91 95972 28969 · +91 95972 28975 · info@winequipments.com




Full model range,
photos and
sizing tools



WORKING PRINCIPLE

How it works

The coil cooling tower works on heat transfer through a heat exchanger with extended fins, cooled by fan-driven air. The process water stays inside the coil.

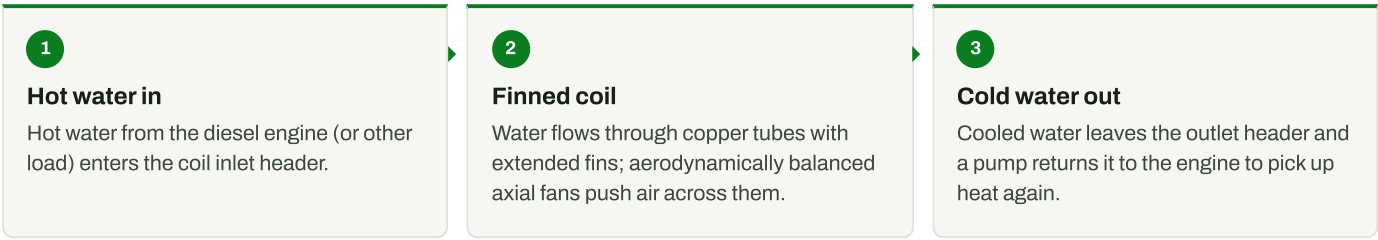

CONSTRUCTION

Features

Coil	Fans & motors	Structure
● Imported copper tubes ● Extended fins for heat transfer ● Heavy-wall steel header pipes	● High-efficiency, low-noise axial fans ● IP55 motors with extended SS shaft ● Low motor speed reduces noise	● Heavy-duty channel base frame ● Galvanised steel frame ● Non-corrosive fibre glass / GI panels

TECHNICAL SPECIFICATIONS

WCC Series models

Rating conditions

Inlet water pressure 2 to 3 bar g	Pressure drop 0.5 bar max.	Motors IP55, extended SS shaft	Enclosure Fibre glass / GI panels
--------------------------------------	-------------------------------	-----------------------------------	--------------------------------------

Model	Capacity TR	Motor power HP	Motor speed rpm	Motors qty	Fan diameter mm	L × W × H mm	Pressure drop bar max.	Water holding litres	In / out NB
WCC 40	40	3	960	2	1060	3300 × 1500 × 1400	0.5	72	3" / 3"
WCC 60	60	5	960	2	1060	3500 × 1500 × 1400	0.5	110	3" / 3"
WCC 80	80	5	960	2	1200	3300 × 1500 × 1700	0.5	140	3" / 3"
WCC 100	100	5	960	2	1200	3500 × 1500 × 2750	0.5	180	3" / 3"
WCC 120	120	7.5	960	2	1200	3750 × 1500 × 2750	0.5	220	3" / 3"
WCC 140	140	7.5	960	2	1200	4300 × 1500 × 2750	0.5	250	3" / 3"
WCC 160	160	7.5	960	3	1200	4800 × 1500 × 2750	0.5	280	4" / 4"
WCC 180	180	7.5	960	3	1200	5400 × 1500 × 2750	0.5	325	4" / 4"
WCC 200	200	7.5	960	4	1200	6000 × 1500 × 2500	0.5	360	4" / 4"
WCC 220	220	7.5	960	4	1200	6500 × 1500 × 2500	0.5	390	4" / 4"
WCC 240	240	7.5	960	4	1200	7000 × 1500 × 2500	0.5	430	4" / 4"
WCC 280	280	7.5	960	6	1200	7000 × 1500 × 2500	0.5	430	4" / 4"

› Outlet water temperature is ambient + 4 °C. Inlet water 75–90 °C at 2–3 bar g.

APPLICATIONS

Diesel genset cooling

Automobile

Chemical

Electronics

Food & beverage

Glass

Pharmaceutical

Textile

Cement

Distilleries & breweries

Health care & hospitals

FROM OUR WORKS



Coil cooling tower

QUESTIONS

How is a coil cooling tower different from an FRP cooling tower?

In an FRP tower the water is sprayed into the air and cooled by evaporation, reaching wet bulb + 4 °C. In a WCC coil tower the water stays sealed inside finned copper tubes and is cooled by air alone, reaching ambient + 4 °C, with no water loss or contamination.

What inlet water temperature can they handle?

Inlet water from 75 to 90 °C at 2 to 3 bar g.

Which genset sizes do WCC units suit?

WCC coil cooling towers cover diesel gensets from 150 to 2000 kVA.

Talk to an engineer

Send your compressor capacity, heat load or water flow, operating pressure, temperatures and site conditions. We reply with a recommended model and quotation.

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur
Arasur Post, Coimbatore 641 407
Tamil Nadu, India

+91 95972 28969 · +91 95972 28975

WhatsApp +91 95972 28969

info@winequipments.com ·

winequipments.com



ISO 9001:2015 certified. Specifications are as per our catalogue and are subject to change without notice; confirm the selection with our engineers before ordering. Issued October 2026.