



**WMF Series**

# Compressed Air Filters

WMF high-efficiency coalescing filters remove oil, dirt, odour and water from compressed air, protecting everything installed downstream. Colour-coded elements in four grades build up air quality to ISO 8573-1.

Capacity

**40 to 1700 CFM**

Grades

**GP · ZP · ZO · ZC**

Finest filtration

**0.01 micron, 0.005 mg/m<sup>3</sup>  
oil**

Max. operating pressure

**30 bar g**

**Win Equipments**

SF No. 4/195 B, Kallangadu, Nadu Arasur, Arasur Post, Coimbatore 641  
407, Tamil Nadu, India  
+91 95972 28969 · +91 95972 28975 · info@winequipments.com




Full model range,  
photos and  
sizing tools




WORKING PRINCIPLE

How it works

Filters are installed in series so each grade protects the next and the air reaches the class your process needs.

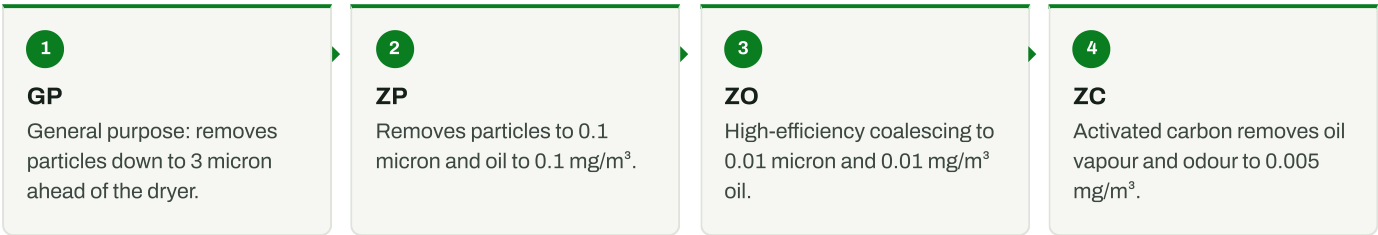

TYPICAL INSTALLATION

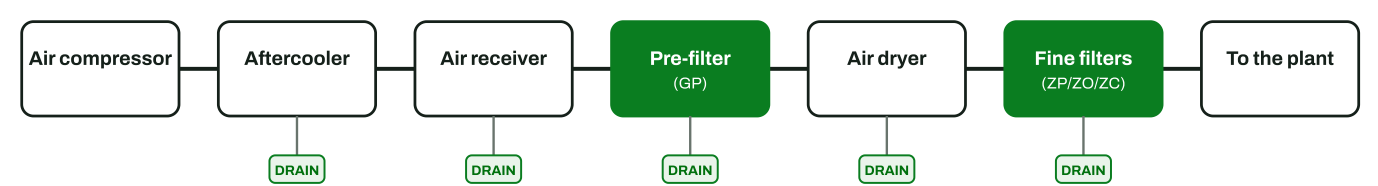

CONSTRUCTION

Features

Body

- Aluminium body
- Condensate level indicator
- Internal automatic drain and manual drain

Elements

- Colour-coded per grade
- Polypropylene or borosilicate media
- Change at 0.7 bar g differential

Monitoring

- Differential pressure indicator
- Differential pressure gauge accessory

# WMF Series models

## Rating conditions

|                              |                                     |                                             |                                                                       |
|------------------------------|-------------------------------------|---------------------------------------------|-----------------------------------------------------------------------|
| Air quality<br>To ISO 8573-1 | Max. operating temperature<br>80 °C | Element change at<br>0.7 bar g differential | Accessories<br>Differential pressure gauge ·<br>automatic drain valve |
|------------------------------|-------------------------------------|---------------------------------------------|-----------------------------------------------------------------------|

| Model   | Capacity<br>CFM | Capacity<br>m³/hr | Connection<br>BSP |
|---------|-----------------|-------------------|-------------------|
| WMF 004 | 40              | 68.5              | ½"                |
| WMF 007 | 50              | 80                | ½"                |
| WMF 010 | 75              | 120               | ¾"                |
| WMF 018 | 125             | 210               | 1"                |
| WMF 030 | 200             | 335               | 1½"               |
| WMF 047 | 310             | 510               | 2"                |
| WMF 070 | 450             | 750               | 2"                |
| WMF 094 | 600             | 1000              | 3"                |
| WMF 150 | 900             | 1500              | 4"                |
| WMF 175 | 1200            | 2040              | 5"                |
| WMF 240 | 1700            | 2760              | 6"                |

- › Each model is available in GP, ZP, ZO and ZC grades. Order as model + grade, e.g. WMF 030 ZO.
- › Working pressure 7 to 30 kg/cm².

FILTER GRADES

Choose the grade for your air quality

| Grade | Particles   | Oil carry-over | Clean pressure drop | Media                                          | Efficiency | ISO 8573-1                     |
|-------|-------------|----------------|---------------------|------------------------------------------------|------------|--------------------------------|
| GP    | 3 micron    | —              | 0.03 bar g          | Polypropylene                                  | —          | Particle class 3 · oil class 5 |
| ZP    | 0.1 micron  | 0.1 mg/m³      | 0.05 bar g          | Borosilicate                                   | 99%        | Particle class 1 · oil class 3 |
| ZO    | 0.01 micron | 0.01 mg/m³     | 0.06 bar g          | Borosilicate                                   | 99.99%     | Particle class 1 · oil class 2 |
| ZC    | 0.01 micron | 0.005 mg/m³    | 0.12 bar g          | Borosilicate with impregnated activated carbon | 99.9999%   | Particle class 1 · oil class 1 |

APPLICATIONS

- Instrument air
- Paint shops
- Food & beverage
- Pharmaceutical
- Electronics
- Textile
- General plant air

FROM OUR WORKS



Pre-filter and moisture filter

QUESTIONS

Which filter grade do I need?

Use GP (3 micron) as a pre-filter, ZP (0.1 micron) for general protection, ZO (0.01 micron, 0.01 mg/m³ oil) for high-quality air, and ZC (activated carbon) where oil vapour and odour must be removed.

What pressure can WMF filters handle?

All grades are rated to a maximum operating pressure of 30 bar g and 80 °C.

When should elements be replaced?

Replace the element when the differential pressure reaches 0.7 bar g.

Talk to an engineer

Send your compressor capacity, heat load or water flow, operating pressure, temperatures and site conditions. We reply with a recommended model and quotation.

**Win Equipments**  
SF No. 4/195 B, Kallangadu, Nadu Arasur  
Arasur Post, Coimbatore 641 407  
Tamil Nadu, India  
**+91 95972 28969 · +91 95972 28975**  
WhatsApp +91 95972 28969  
info@winequipments.com ·  
winequipments.com



ISO 9001:2015 certified. Specifications are as per our catalogue and are subject to change without notice; confirm the selection with our engineers before ordering. Issued October 2026.