



WRV Series

Compressed Air Receiver Tanks

An air receiver stores compressed air, steadies pressure for the plant and gives condensate somewhere to settle before it travels down the line. Every WRV vessel is designed to requirement and hydrostatically tested, with ASME VIII fabrication available on request.

Standard models	Working pressure	Designed to requirement	Inlet air temperature
250 to 10,000 litres	7 · 10 · 12.5 bar g	0.5 to 40 m³, 6 to 30 bar g	Up to 100 °C

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur, Arasur Post, Coimbatore 641
407, Tamil Nadu, India
+91 95972 28969 · +91 95972 28975 · info@winequipments.com




Full model range,
photos and
sizing tools




WORKING PRINCIPLE

How it works

Air drawn into a compressor carries moisture. Compression raises its temperature and its capacity to hold water vapour; when the air cools again, that vapour condenses.

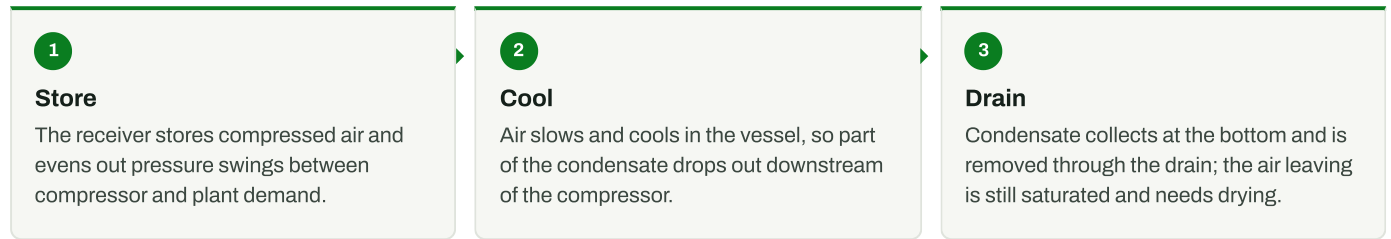

TYPICAL INSTALLATION

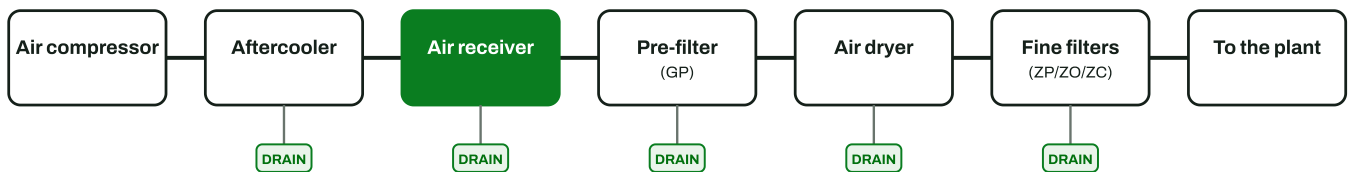

Automatic drain valves discharge condensate from the aftercooler, receiver, filters and dryer.

CONSTRUCTION

Features

Pressure classes

- Variant 2: 7 bar g working, 8 bar g design, 12 bar g hydro test
- Variant 3: 10 bar g working, 11 bar g design, 17 bar g hydro test
- Variant 4: 12.5 bar g working, 14 bar g design, 21 bar g hydro test

Access

- Hand hole up to WRV 150
- Man hole from WRV 200

Foundation

- Legs up to WRV 150
- Skirt or legs from WRV 200

WRV Series models

Rating conditions

Testing Every vessel hydrostatically tested	Code ASME VIII on requirement	Accessories Supplied with standard accessories	Orientation Vertical and horizontal
--	----------------------------------	---	--

Model	Capacity litres	Working pressure options bar g	Outer diameter mm	Overall height mm	End connection BSP / NB	Access	Foundation
WRV 025	250	7 · 10 · 12.5	490	1620	¾" BSP	Hand hole	Leg
WRV 050	500	7 · 10 · 12.5	630	2000	1" BSP	Hand hole	Leg
WRV 100	1000	7 · 10 · 12.5	750	2750	1½" BSP	Hand hole	Leg
WRV 150	1500	7 · 10 · 12.5	980	3100	2" BSP	Hand hole	Leg
WRV 200	2000	7 · 10 · 12.5	980	3250	2" NB	Man hole	Skirt / leg
WRV 300	3000	7 · 10 · 12.5	1250	2940	4" NB	Man hole	Skirt / leg
WRV 500	5000	7 · 10 · 12.5	1500	3525	6" NB	Man hole	Skirt / leg
WRV 1000	10000	7 · 10 · 12.5	2000	3450	8" NB	Man hole	Skirt / leg

- › Pressure variants: 2 = 7 bar g working / 8 design / 12 hydro test; 3 = 10 / 11 / 17; 4 = 12.5 / 14 / 21 bar g.
- › Vessels outside the standard range (0.5 to 40 m³, 6 to 30 bar g) are designed to requirement.

APPLICATIONS

Compressed air plants of all sizes

Wet receiver after the compressor

Dry receiver after the dryer and filters

FROM OUR WORKS



Air receiver tanks

QUESTIONS

What pressure ratings are available?

Each standard WRV size is offered at 7, 10 or 12.5 bar g working pressure, with design pressures of 8, 11 and 14 bar g and hydrostatic test pressures of 12, 17 and 21 bar g.

Do I need a wet and a dry receiver?

A typical installation uses a wet receiver after the compressor to settle condensate, and a dry receiver after the dryer and filters to buffer clean, dry air for the plant.

Can you build to ASME?

Yes. Vessels can be fabricated to ASME VIII on requirement.

Talk to an engineer

Send your compressor capacity, heat load or water flow, operating pressure, temperatures and site conditions. We reply with a recommended model and quotation.

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur
Arasur Post, Coimbatore 641 407
Tamil Nadu, India

+91 95972 28969 · +91 95972 28975

WhatsApp +91 95972 28969

info@winequipments.com ·

winequipments.com



ISO 9001:2015 certified. Specifications are as per our catalogue and are subject to change without notice; confirm the selection with our engineers before ordering. Issued October 2026.