



WCT RL Series · WCT SL Series

FRP cooling towers, round and square

A cooling tower rejects waste heat from your process to the atmosphere by evaporation. WCT round towers spray hot water over honeycomb PVC fills while an axial fan draws air through, returning water to your equipment at wet bulb + 4 °C.

Capacity

10 to 300 TR

Outlet water

Wet bulb + 4 °C

Inlet water temperature

40 to 100 °C

Inlet water pressure

2 to 3 bar g

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur, Arasur Post, Coimbatore 641 407, Tamil Nadu, India
+91 95972 28969 · +91 95972 28975 · info@winequipments.com




Full model range,
photos and
sizing tools



WORKING PRINCIPLE

How it works

A cooling tower is a heat-rejection device that extracts waste heat from the application to the atmosphere using a fan and motor. The heat rejection is evaporative.

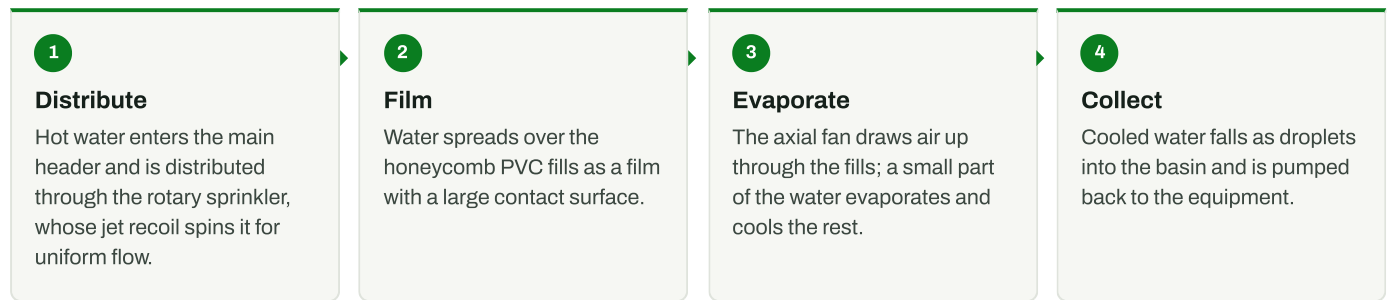

CONSTRUCTION

Features

FRP casing

- Gel-coated fibre glass reinforced polyester
- Compact and light for easy installation

Motor

- Squirrel cage induction, TEFC, IP55
- Flanged with extended shaft
- Hindustan / Stark make

PVC fills

- Rigid PVC honeycomb, very large contact area
- 600 × 300 × 150 mm blocks
- Flute height 12–19 mm, sheet 0.2–0.25 mm

Fan

- Dynamically balanced axial type
- Aluminium alloy and Nylon 66
- Low noise, low running cost

Rotary sprinkler

- Jet recoil drives rotation for even distribution
- Nylon and aluminium construction
- Minimises drift loss

PP rings option

- Easy to clean
- Withstands more than 90 °C
- Rigid, individual, not bonded

TECHNICAL SPECIFICATIONS

WCT RL Series · Round FRP Cooling Towers

Rating conditions

Fills L: up to 55 °C inlet · H: 55–85 °C inlet · P: polypropylene rings	Motor TEFC IP55, 415 V / 3 Ph / 50 Hz	Working pressure 2 to 3 bar g	Evaporation loss $0.00085 \times 1.8 \times \text{flow} \times \Delta T$
--	--	----------------------------------	---

Model	Capacity TR	Water flow m³/hr	Motor HP	Motor speed rpm	Fan diameter mm	In / out NB	Dia × H mm	Shipping weight kg	Operating weight kg
WCT 010 RL	10	6	0.5	1440	450	1½" / 1½"	930 × 1690	80	280
WCT 020 RL	20	12	1	960	750	2" / 2"	1380 × 1690	100	450
WCT 030 RL	30	18	1	960	750	3" / 3"	1660 × 1860	175	540
WCT 040 RL	40	24	1	960	850	3" / 3"	1780 × 1950	205	700
WCT 050 RL	50	30	2	960	900	3" / 3"	1990 × 2120	260	760
WCT 060 RL	60	36	3	960	1160	3" / 3"	1920 × 2720	330	800
WCT 080 RL	80	48	3	960	1160	4" / 4"	2150 × 2670	375	890
WCT 100 RL	100	60	5	960	1400	5" / 5"	2895 × 3050	615	1850
WCT 125 RL	125	75	5	960	1400	5" / 5"	2950 × 3250	805	2300
WCT 150 RL	150	90	5	960	1600	5" / 5"	3000 × 3950	1005	2650
WCT 200 RL	200	120	7.5	710	1800	6" / 6"	3300 × 4230	1110	3050
WCT 300 RL	300	180	12.5	600	2400	8" / 8"	4450 × 3900	1950	4050

- › Model code: WCT + capacity in TR + R (round) + fill type: L low-temperature fills (up to 55 °C inlet), H high-temperature fills (55–85 °C inlet), P polypropylene rings. Working pressure 2–3 bar g max.
- › Each model is available in L, H and P variants.
- › Rated power is the maximum power consumed at rated conditions.

TECHNICAL SPECIFICATIONS

WCT SL Series · Square FRP Cooling Towers

Rating conditions

Fills L: up to 55 °C inlet · H: 55–85 °C inlet · P: polypropylene rings	Motor TEFC IP55, 415 V / 3 Ph / 50 Hz	Drift eliminator Rigid PVC, 600 × 600 × 130 mm	Evaporation loss 0.00085 × 1.8 × flow × ΔT
--	--	---	---

Model	Capacity TR	Water flow m³/hr	Motor HP	Motor speed rpm	Fan diameter mm	In / out NB	L × D × H mm	Shipping weight kg	Operating weight kg
WCT 010 SL	10	6	0.5	1440	450	2" / 2"	825 × 825 × 1500	85	210
WCT 020 SL	20	12	0.5	1440	450	2" / 2½"	825 × 825 × 1900	90	225
WCT 030 SL	30	18	1	960	750	2" / 2½"	1000 × 1000 × 2100	240	750
WCT 040 SL	40	24	1	960	800	2½" / 2½"	1170 × 1170 × 2600	320	850
WCT 060 SL	60	36	2	960	1160	3" / 3"	1400 × 1400 × 2400	350	910
WCT 100 SL	100	60	5	960	1400	5" / 5"	1750 × 1750 × 2800	525	1550
WCT 150 SL	150	90	7.5	960	1400	6" / 6"	2400 × 2400 × 3100	700	2100
WCT 200 SL	200	120	7.5	710	1800	8" / 8"	2400 × 2400 × 3300	775	2250
WCT 250 SL	250	150	10	710	1800	8" / 8"	3000 × 3000 × 3200	1110	3100
WCT 300 SL	300	180	12.5	600	2200	8" / 8"	3000 × 3000 × 3200	1250	3300

- › Model code: WCT + capacity in TR + S (square) + fill type: L low-temperature fills (up to 55 °C inlet), H high-temperature fills (55–85 °C inlet), P polypropylene rings. Working pressure 2–3 bar g max.
- › Each model is available in L, H and P variants.
- › Rated power is the maximum power consumed at rated conditions.

Selection factors: Round FRP Cooling Towers

Selection factor by cooling range (ΔT) and approach to wet bulb, round towers.

ΔT °C \ approach °C	2	3	4	5	6	7	8
4	10	11	12	13	14	15	16
6	9	10	11	12	13	14	15
8	8	9	10	11	12	13	14
10	7	8	9	10	11	12	13
12	6	7	8	9	10	11	12

$$\text{Evaporation loss} = 0.00085 \times 1.8 \times \text{flow rate (m}^3/\text{hr)} \times \Delta T$$

Selection factors: Square FRP Cooling Towers

Selection factor by cooling range (ΔT) and approach to wet bulb, square towers.

ΔT °C \ approach °C	4	5	6	7	8
4	13	14	15	16	17
6	12	13	14	15	16
8	11	12	13	14	15
10	10	11	12	13	14
12	9	10	11	12	13
14	8	9	10	11	12
16	7	8	9	10	11

$$\text{Evaporation loss} = 0.00085 \times 1.8 \times \text{flow rate (m}^3/\text{hr)} \times \Delta T$$

APPLICATIONS

Automobile

Cement

Chemical processing

Diesel generators

Distilleries & breweries

Soft drinks

Electronics

Food & beverage

Glass

Health care & hospitals

Induction furnaces

Paper mills

Plastic machinery

PET bottle machines

Spinning, knitting & hosiery

Sugar

FROM OUR WORKS



Round FRP cooling towers installed on site



Round FRP cooling tower



Round FRP cooling tower



Square FRP cooling tower with access ladder

QUESTIONS

What outlet water temperature can a WCT tower achieve?

Outlet water is rated at wet bulb temperature + 4 °C.

How much water is lost to evaporation?

Evaporation loss $\approx 0.00085 \times 1.8 \times \text{flow rate (m}^3/\text{hr)} \times \Delta T$. For example, 30 m³/hr with a 5 °C range loses about 0.23 m³/hr.

Which fill should I choose?

L (low-temperature) fills for inlet water up to 55 °C, H (high-temperature) fills for 55–85 °C, and polypropylene rings (P) for hot or dirty water up to above 90 °C.

Where should the tower be installed?

Install the tower so the pump sits below the sump outlet level; never place the pump above the sump outlet.

Talk to an engineer

Send your compressor capacity, heat load or water flow, operating pressure, temperatures and site conditions. We reply with a recommended model and quotation.

Win Equipments

SF No. 4/195 B, Kallangadu, Nadu Arasur
Arasur Post, Coimbatore 641 407
Tamil Nadu, India

+91 95972 28969 · +91 95972 28975

WhatsApp +91 95972 28969

info@winequipments.com ·

winequipments.com



ISO 9001:2015 certified. Specifications are as per our catalogue and are subject to change without notice; confirm the selection with our engineers before ordering. Issued October 2026.