

Assisted Living

Education

Hospitality

Commercial

Retail

Multi-Family

NEXT STEPTM Walk Soft by dinoflex Luxury Vinyl Tile



*This product is currently not available in the USA.






Luxury Vinyl Tile Flooring

Dinoflex's newly minted Luxury Vinyl Tile Series has been designed to offer our clients an environmentally friendly flooring option, which authentically replicates the natural beauty and luxurious style of hardwood, concrete and marble. Backed with our WalkSoft recycled rubber material, our single step glue down tiles provide a quick and virtually seamless installation.

Luxury Vinyl Tiles provide a flooring option that is low maintenance and can be installed over existing hard surface flooring. Our unique recycled rubber backing provides the following distinct advantages:

- Sound reduction
- Ergonomic benefits for underfoot comfort. Testing shows an 85% improvement in ergonomic behaviour over LVT alone
- Thermal benefits to reduce heating costs
- Reduced total cost of ownership (TCO) due to substantial reduction of installation costs
- No Underlay or double step glue down process required
- WalkSoft backing provides reduced fall consequences

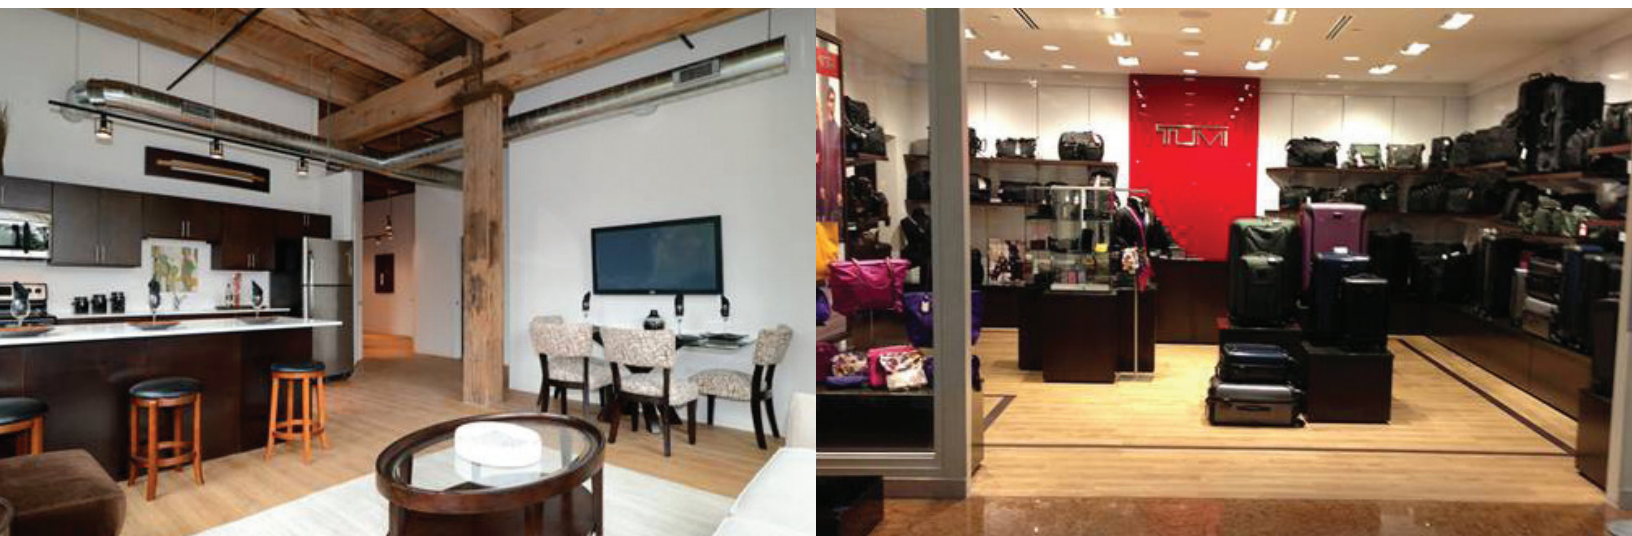

Applications:

- Assisted Living
- Multifamily
- Education
- Hospitality
- Commercial
- Retail
- Fitness/Cardio
- Residential

Features:

- Realistic patterns replicating the most popular styles on the market
- Single step installation process significantly reduces labor costs
- Nano ceramic coating for durability and reduced maintenance costs
- Low VOC Emissions
- Sound Absorbing
- Minimum 60% - 75% recycled content by weight depending on format
- Walk Soft Backing is FloorScore certified
- Warranty Protected

Formats:

LVT Top Layer	WalkSoft Backing	Total Thickness
12mil (.30mm), 2mm Recycled or Virgin	3mm, 5mm	5mm, 7mm
20mil (.51mm), 2.5mm Recycled or Virgin	3mm, 5mm	5.5mm, 7.5mm
20mil (.51mm), 3mm Recycled or Virgin	3mm, 5mm	6mm, 8mm

Standard Thickness Tolerance: +/- 0.5 mm

(**Bolded** = indicates special order)

Available Patterns:



Let Us Introduce Ourselves

Dinoflex has been a leading innovator in the manufacturing of recycled rubber products for over 25 years. We specialize in producing premium quality rubber flooring, exterior tiles and custom products. Our merchandise provides solutions for architects, designers and builders that are cost effective and environmentally friendly.

Sizes:

- 18.5" x 37" plank (47 cm x 94 cm)
- 37" x 37" tile (94 cm x 94 cm)

NEXT STEP_{TM} Walk Soft Luxury Vinyl Tile Technical Data

TEST	DESCRIPTION	RESULTS
ASTM C518-10	Thermal Transmission Properties	Minimum 0.55-R-Value
ASTM D2240-05	Durometer - Shore Hardness	94 Shore A
ASTM D3574	Anti Fatigue Compression Deflection Comparison	2mm/5mm - 0.024" Deflection - 20lbs/sq. in. 2mm/5mm - 0.034" Deflection - 40lbs/sq. in.
ASTM D395(B)-14	Compression Set Under Force	≥ 95.1% Recovered
ASTM E2179-03	Impact Sound Transmission	IIC 50 - 51
ASTM E648-14a	Critical Radiant Flux (Fire Test)	Pass - 1.00 Watts/sq cm
ASTM F137-08	Flexibility of Resilient Flooring	6mm Mandrel PASSES
ASTM F1914-07	Short Term Indentation	≤ 0.014" (4.67%) Loss
ASTM F2199-09	Dimensional Stability after Heat Exposure	≤ 0.006"/12"L (-0.05%) and 0.007"/12" W (0.06%)
ASTM F511-11	Quality Of Cut	Average width of Space between tiles = 0.36mm Max opening where 4 corners meet = 0.89mm Edge Condition Comments = No burrs, nicks or chipped edges
ASTM F970-07	Static Load (250 lbs)	0.002 (0.2%) residual compression (5mm)

Please Note: All measurements are subject to nominal variation.

For complete specifications and technical data, please visit our website at www.dinoflex.com

Contact Dinoflex for specific warranty details.



Dinoflex
P.O. Box 3309
5590 46 Ave S.E.
Salmon Arm, B.C., Canada
V1E 4S1

Toll Free: 1.877.713.1899
Direct: 250.832.7780
Email: info@dinoflex.com

www.dinoflex.com



*This product is currently not available in the USA.

Represented By:



Publication Date:
December 2014