
**********Draft**********

GATT_Server VGA testing
with logicAnalyer 6.0.0
by
Dr.cd Agustín Gimenez Bernad
10/26/26


**********Draft**********

Programmed a pico2 with logic-analyzer-firmware_v6.0.0_BOARD_PICO.uf2

Programmed a pico2_w with GATT_Server.uf2 which is Bluetooth Server with VGA.
Initial test are 4 signals Vsync, Hsync, red, and blue.

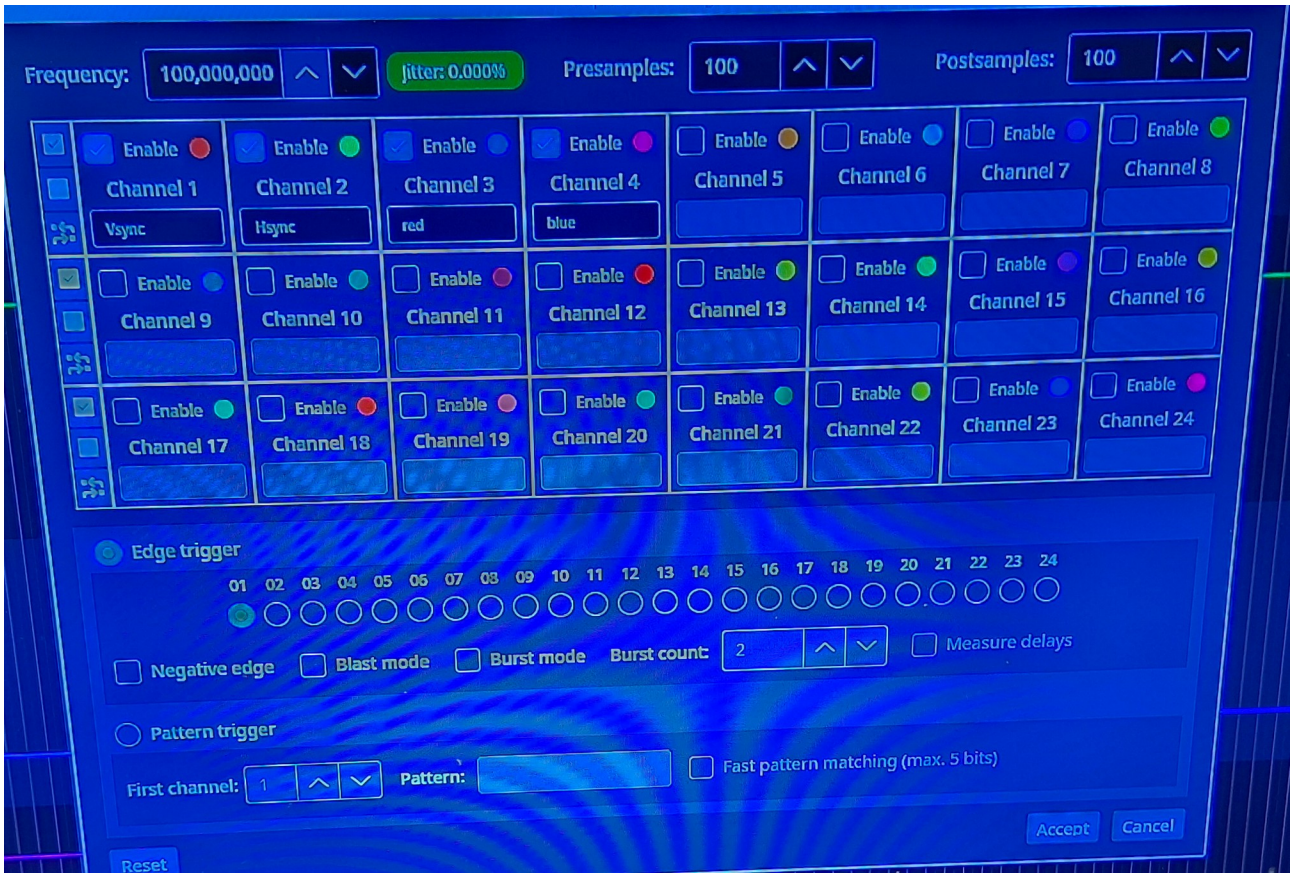


This was not working until I connected a Digilent VGA pmod instead of 3 330 ohm resistors.

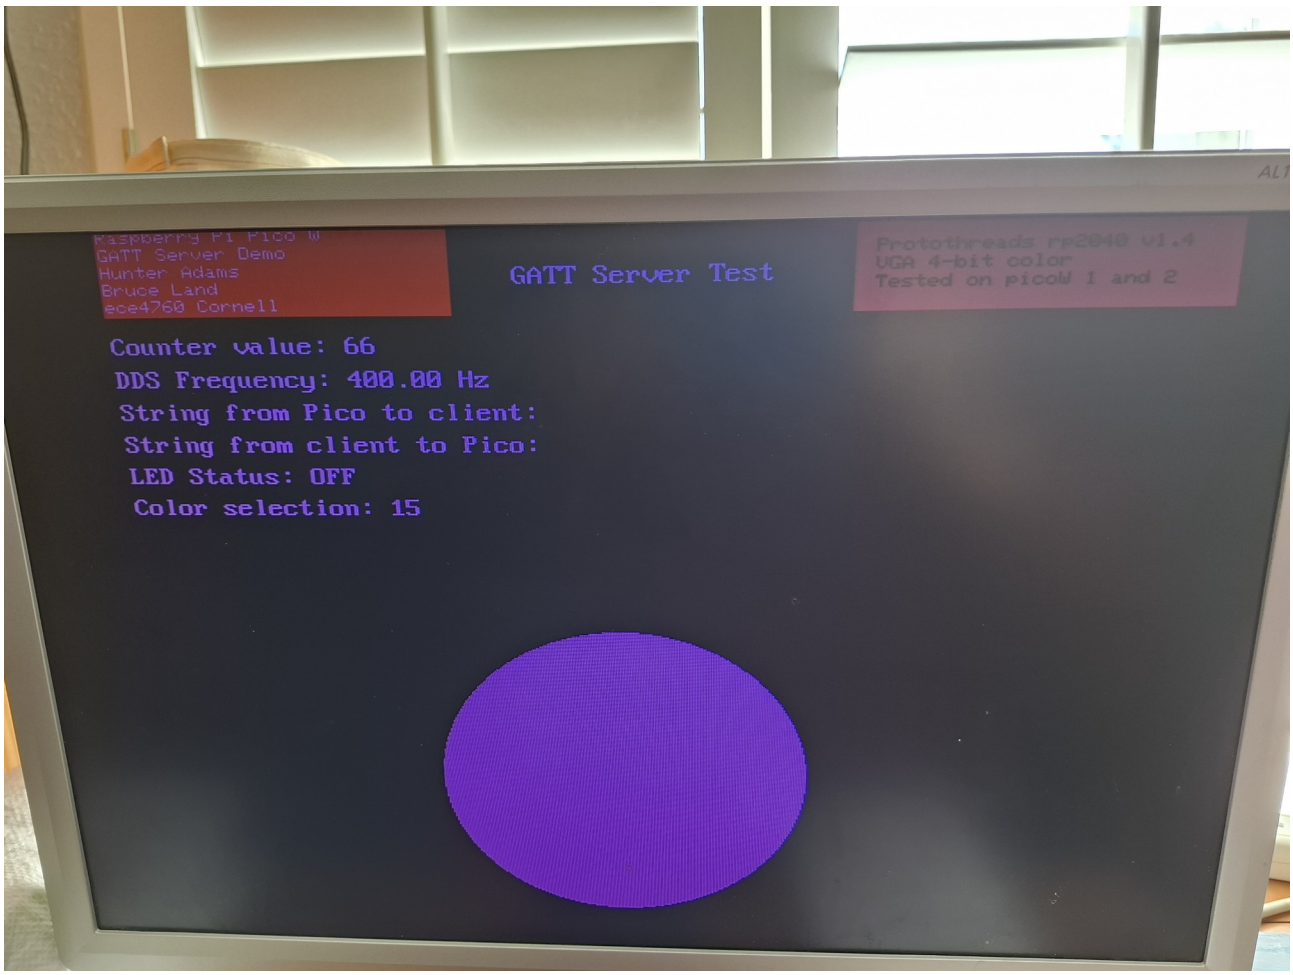

VGA GATT_Server.

The trigger was the Vsync. The blue signal went hi after the Hsync.

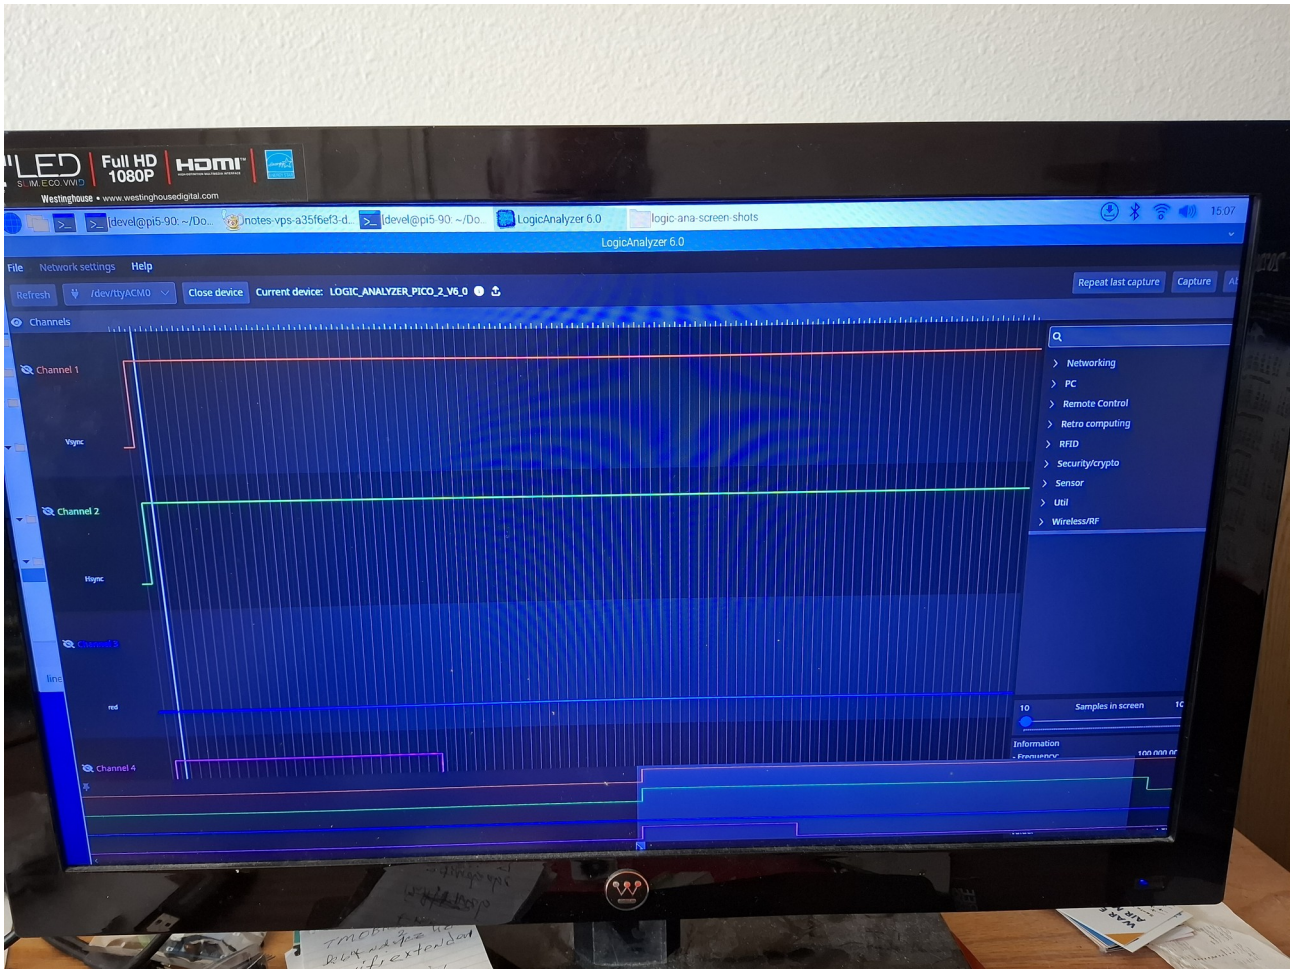
LED
Full HD
1080P
HDMI
Westinghouse • www.westinghousedigital.com
devel@pi5-90: ~/Do...
notes-vps-a35f6ef3-d...
devel@pi5-90: ~/Do...
LogicAnalyzer 6.0
logic-ana-screen-shots
15:07
LogicAnalyzer 6.0
File
Network settings
Help
Refresh
/dev/ttyACM0
Close device
Current device: LOGIC_ANALYZER_PICO_2_V6_0
Repeat last capture
Capture
Channels
Channel 1
Vsync
Channel 2
Hsync
Channel 3
red
Channel 4
Networking
PC
Remote Control
Retro computing
RFID
Security/crypto
Sensor
Util
Wireless/RF
Samples in screen
Information

XX