

*****Default*****

4 pmod-ethernets

pico2-ice PipelineC pmod-ethernet MAC a7:b1:c2:d3:e4:f5

pico-ice PipelineC pmod-ethernet MAC a8:b1:c2:d3:e4:f5

pico-ice PipelineC pmod-ethernet MAC a9:b1:c2:d3:e4:f5


Catboard PipelineC pmod-ethernet MAC a0:b1:c2:d3:e4:f5

gateway.bin and gateway.uf2 created with oss-cad-suite

OVHcloud VPS Ubuntu 24.04

10/31/25

*****Default*****

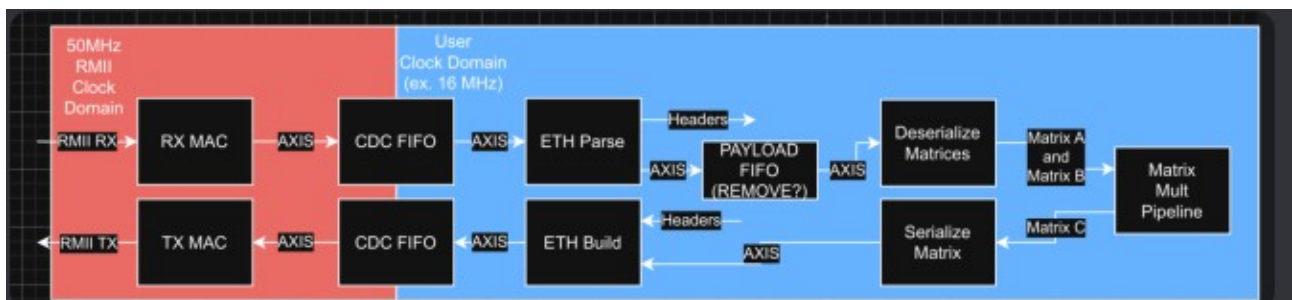

XX

with those and the work() pipeline looks like so



Can come over to [# pipelinec](#) to hear more about this first demo of configuring the inputs work func and outputs to do 2x2 int8 matrix multiplication

RPi3 with Catboard 2 pico-ice and pico2-ice



RPi3 w/Catboard
pmod-ethernet

pico-ice w/
pmod-ethernet

pico2-ice w/
Pmod-ethernet
FTDI2USB

pico-ice w/
pmod-ethernet

a0:b1:c2:d3:e4:f5

The screenshot shows a Linux desktop with a blue background featuring a person in a boat. The desktop has icons for Trash, pico2-ice, and pico-ice. A Wireshark window is open, displaying a packet capture on the 'eth0' interface. The filter is 'eth.addr == a0:b1:c2:d3:e4:f5'. The packet list shows two packets: a packet from 'Raspberr_01:a0:b1:c2:d3:e4:f5' to 'Raspberr_ad:a0:b1:c2:d3:e4:f5' at 13.304191375s, and a packet from 'Raspberr_ad:a0:b1:c2:d3:e4:f5' to 'Raspberr_01:a0:b1:c2:d3:e4:f5' at 13.304191375s. The packet details show the first packet is an Ethernet II frame with a data length of 8 bytes. The packet bytes pane shows the raw data: 'a0 b1 c2 d3 e4 f5 b6 27 eb ad a6 2c ff ff 53 4d'. A terminal window is open in the background, showing the command 'dev@pi3-28: ~/ubuntu-vps-a35f6f3/PipelineC/pmod a0:b1:c2:d3:e4:f5' and its output, which includes statistics for CPU, FPGA, and network performance.

a7:b1:c2:d3:e4:f5

The screenshot shows a Linux desktop with a blue background featuring a person in a boat. The desktop has icons for Trash, pico2-ice, and pico-ice. A Wireshark window is open, displaying a packet capture on the 'eth0' interface. The filter is 'eth.addr == a7:b1:c2:d3:e4:f5'. The packet list shows two packets: a packet from 'Raspberr_01:a0:b1:c2:d3:e4:f5' to 'Raspberr_ad:a0:b1:c2:d3:e4:f5' at 13.304191375s, and a packet from 'Raspberr_ad:a0:b1:c2:d3:e4:f5' to 'Raspberr_01:a0:b1:c2:d3:e4:f5' at 13.304191375s. The packet details show the first packet is an Ethernet II frame with a data length of 46 bytes. The packet bytes pane shows the raw data: 'b8 27 eb ad a6 2c a7 b1 c2 d3 e4 f5 ff ff 53 4d'. A terminal window is open in the background, showing the command 'dev@pi3-28: ~/ubuntu-vps-a35f6f3/PipelineC/back-up-A7/050125' and its output, which includes statistics for CPU, FPGA, and network performance.

a8:b1:c2:d3:e4:f5

