


XX

If the pshell/cmpico2 or pshell/cmpico are used to create the Makefile.


The FTDI 2 USB is located in lower part of the image below.

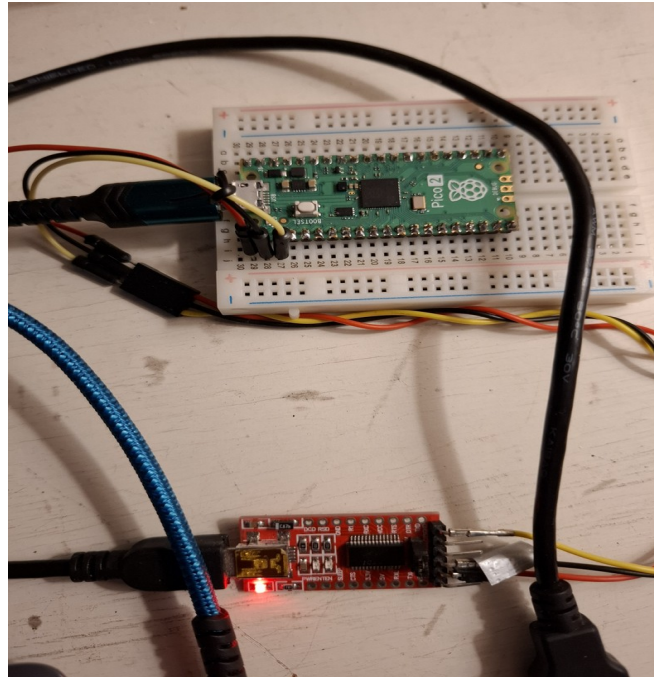

These are the settings of the USB port.

```
devel@pi4-50: ~  
File Edit Tabs Help  
Welcome to minicom 2.8  
OPTI+-----  
Port| A - Serial Device      : /dev/ttyUSB0  
| B - Lockfile Location  : /var/lock  
Pres| C - Callin Program    :  
| D - Callout Program   :  
| E - Bps/Par/Bits      : 115200 8N1  
| F - Hardware Flow Control : No  
| G - Software Flow Control : No  
| H - RS485 Enable       : No  
| I - RS485 Rts On Send  : No  
| J - RS485 Rts After Send : No  
| K - RS485 Rx During Tx : No  
| L - RS485 Terminate Bus : No  
| M - RS485 Delay Rts Before : 0  
| N - RS485 Delay Rts After : 0  
|  
+ Change which setting? |  
+-----+  
CTRL-A Z for help | 115200 8N1 | NOR | Minicom 2.8 | VT102 | Offline | ttyUSB0
```

This is USB after reboot

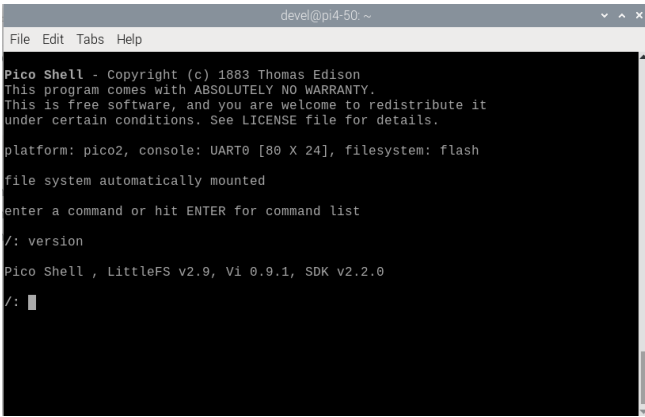

```
devel@pi4-50: ~  
File Edit Tabs Help  
Pico Shell - Copyright (c) 1883 Thomas Edison  
This program comes with ABSOLUTELY NO WARRANTY.  
This is free software, and you are welcome to redistribute it  
under certain conditions. See LICENSE file for details.  
  
platform: pico2, console: UART0 [80 X 24], filesystem: flash  
file system automatically mounted  
enter a command or hit ENTER for command list  
/: version  
Pico Shell , LittleFS v2.9, Vi 0.9.1, SDK v2.2.0  
/: █
```

XX