

# Products Specification



## GR-TG SERIES

High efficiency flood light designed with the exuberant light control resulting in a low consumption of electricity.

## Tropical Weather Designed

In the tropical region which is having a severe weather with heavy rainfall and humidity, this flood light is special designed for longlasting in such environment




# TECHNICAL SPECIFICATION



Model	GR-TG100	GR-TG200
Dimension	230 x 310 130 mm	360 x 420 x 60mm
Weight	2.50 KG	5.40 KG
Operate Temperature	-40 to 50 Degree C	
Water Resistance	IP65	
Installation Method	On pole or Rooftop	
Light Temperature	3000K - 6500k	
Life Time	Minimum 50,000 hours	
CRI	>=85	
SCDM	5 SCDM	
Light Efficiency	> 190 lm/Watt	
Lumen Output	> 19,000 lm	> 38,000 lm
Watt	100 Watt	200 Watt
Operating Voltage	160-270 V, 50-60 Hz	
Power Factor	> 0.96	





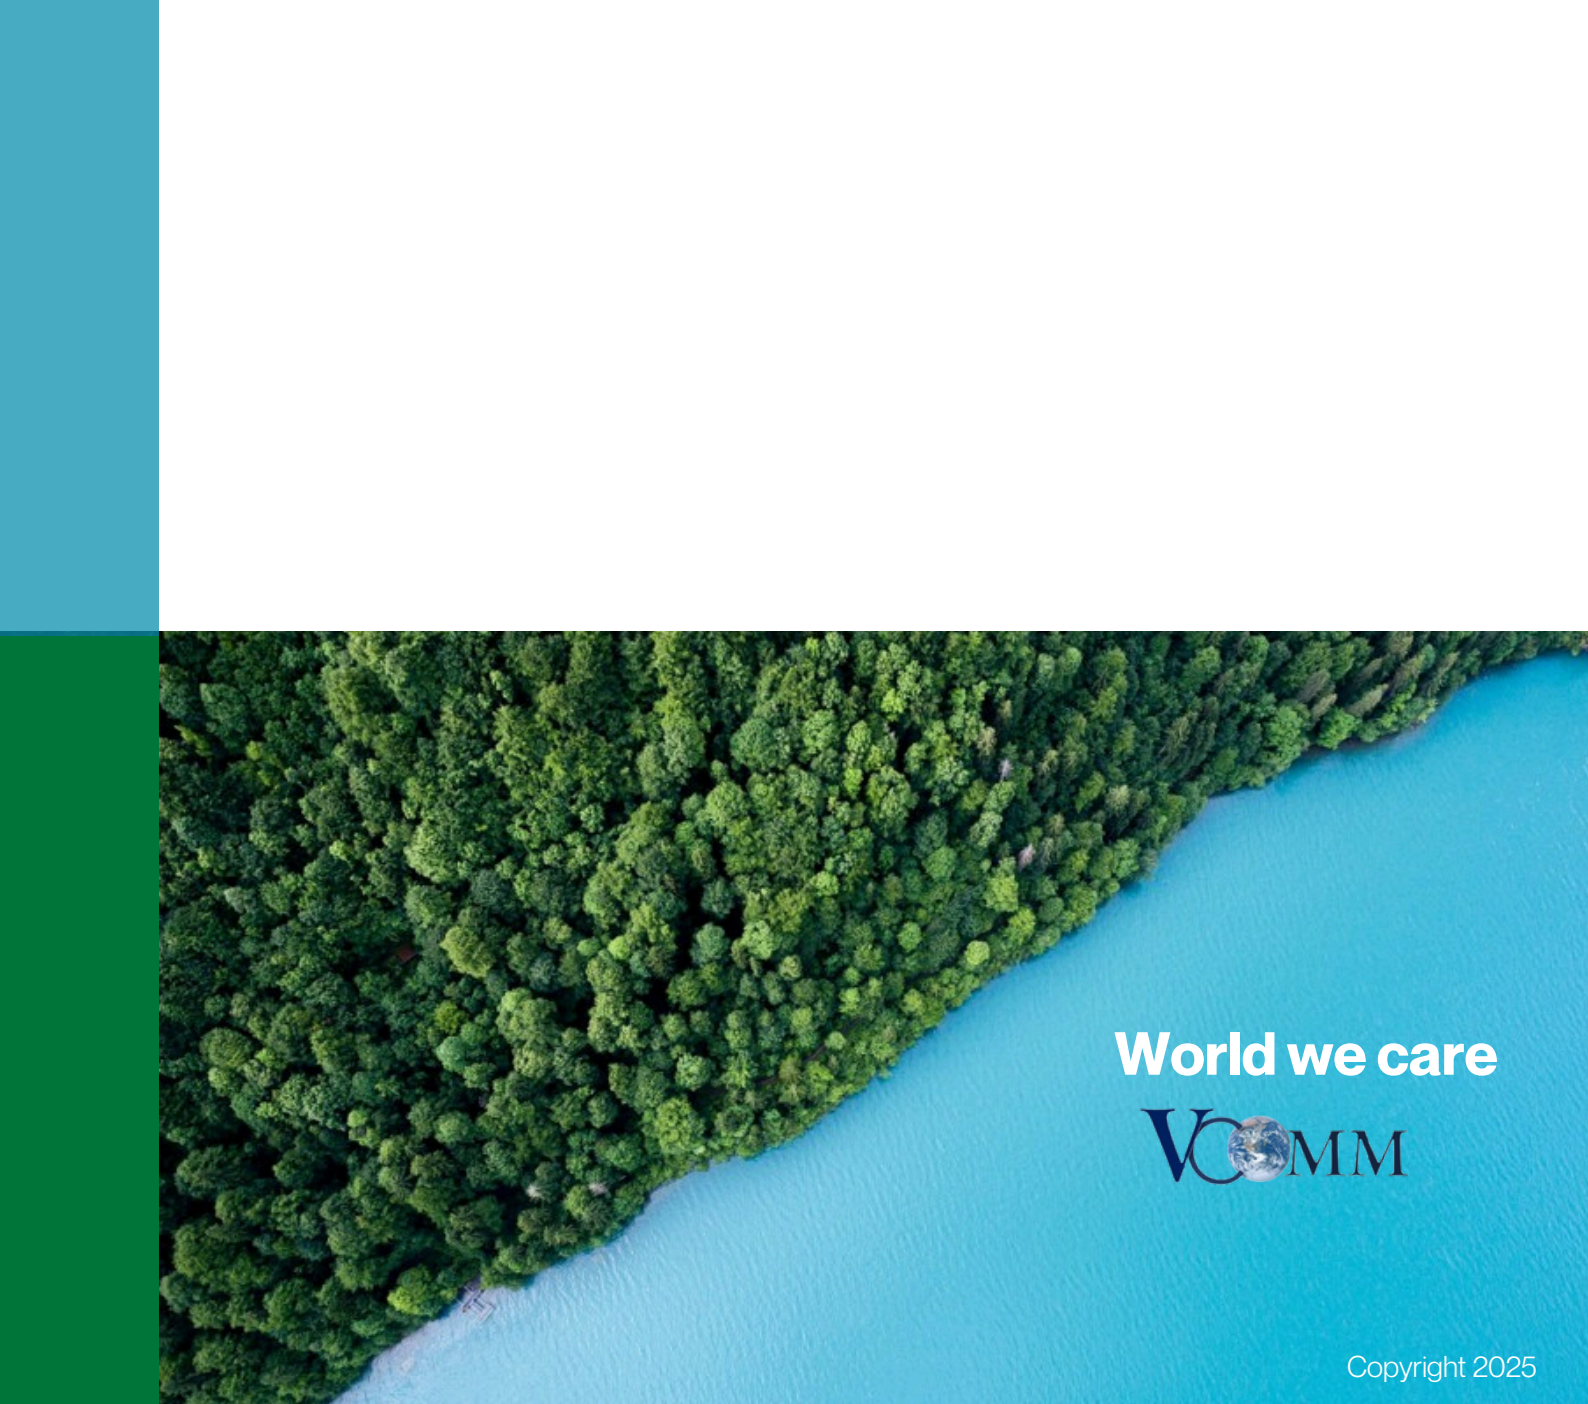

World we care



Copyright 2025