



8-bit serial in/parallel out shift register

Place the U1 and U2 footprints so that one straddles the other. Only one component can be populated at a time.

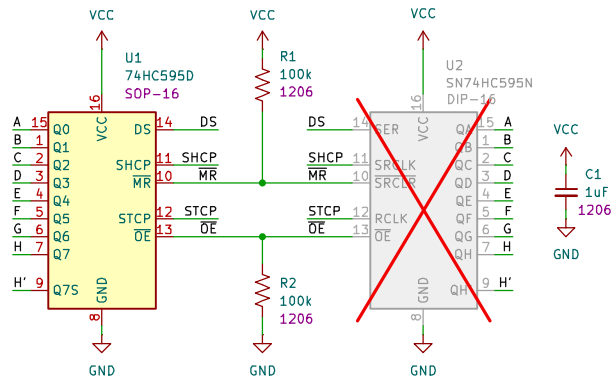

You can choose between U1 (SOP-16) or U2 (DIP-16). Both are the same shift register in different packages. The larger through-hole DIP-16 is easier to solder for beginners, while the smaller SOP-16 offers a challenge for those with more experience.


7-segment display



The display is common cathode, so all segments driven HIGH by U1/U2 are turned ON. Resistors R1-R8 limit the current through each segment.

Header pins

Header pins are not populated during PCB assembly.



Block name

Design notes

Silkscreen & layout notes

Component package

This information is provided "as-is". You bear the risk of using it. Some information relates to pre-released specification which may change without notice. Author makes no warranties, express or implied, with respect to the information provided here.

solderbit Segment Shift Edition
Aron Eggens
Lancaster University
Devices Lab

Sheet: /
File: solderbit-segment-shift-edition.kicad_sch

Title: solderbit-segment-shift-edition

Size: A4
Date: 2026-04-21
KiCad E.D.A. 10.0.1

Rev: v0.1
Id: 1/1