



8-bit serial in/out shift register

Place the U1 and U2 footprints so that one straddles the other. Only one component should be populated at a time.

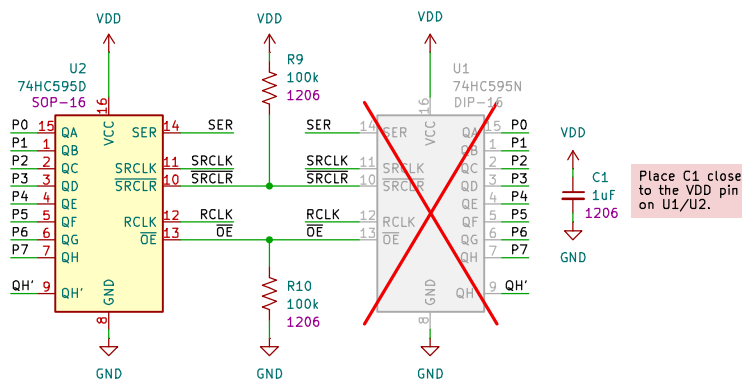

The user can choose between U1 (SO-16) or U2 (DIP-16) – both are the same I/O expander in different packages. The larger through-hole DIP-16 is easier to solder for beginners, while the smaller SO-16 offers a challenge for those with more experience.


7-segment display



The display is common anode, so all segments driven LOW by U1/U2 are turned ON. Segments driven HIGH by U1/U2 are turned OFF. Resistors R1–R8 limit the forward current through each segment.

Header pins

2.54 mm pitch header pins to attach the device to a standard breadboard.



Block name

Design notes

Silkscreen & layout notes

Component package

This information is provided "as-is". You bear the risk of using it. Some information relates to pre-released specification which may change without notice. Author makes no warranties, express or implied, with respect to the information provided here.

solder:bit Segment Shift Edition

Aron Eggens

Lancaster University

Devices Lab

Sheet: /

File: solderbit-segment-shift-edition.kicad_sch

Title: solderbit-segment-shift-edition

Size: A4

Date: 2026-04-02

Rev: v0.1

KiCad E.D.A. 9.0.7

Id: 1/1