Equal logical work; separate host and device scopes

Blocking (B) Lookahead (L)

(a) Request-period totals per lifecycle: identical in all five blocks

Application / read-pipeline counter	Blocking	Lookahead
Logical checkpoint-reader bytes	128,811,263,616	128,811,263,616
Requested host-to-device bytes	128,811,927,312	128,811,927,312
Verified reads / recorded wasted bytes	40,943 / 0	40,943 / 0
Unknown reads / unknown bytes	0 / 0	0 / 0

(b) Logical host reservation

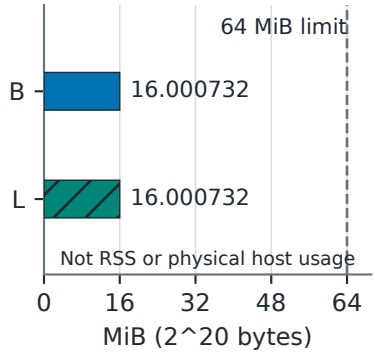

(c) Device-wide sampled maximum

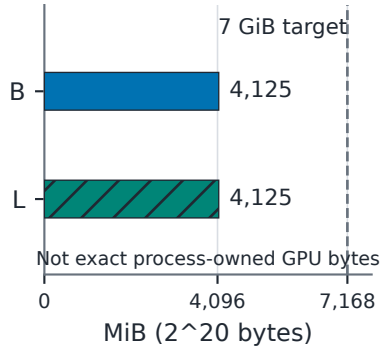

(d) Shared NFS client server-read bytes

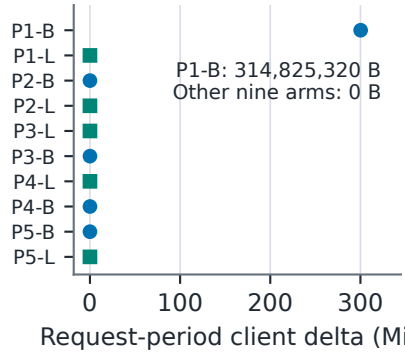

Bars: the same maximum in every arm, not a sum of lifetime peaks. Host logical peak = 16,777,984 B; device maximum = 4,125 MiB. Reader and H2D totals are equal across modes, not to one another. Recorded zero waste is not unknown physical backend traffic. Do not add host PSS to device or logical gauges. Shared NFS/page cache may be warm; startup/shutdown PID-I/O deltas remain unknown.