


- 1) PREVENT SELF-OSCILLATIONS:
since in the event of a short circuit
there is a strong tendency to self-oscillate
it may be necessary to review (downwards)
C18 and/or C22 values
- 2) SCALE TRANSFORMER VOLTAGE:
Increase R1 and R2. Example:
36V ac : R1=150ohm 3W, R42=82ohm 3W
- 3) SCALE CURRENT:
add 1 power transistor and 2 resistors every 2A.
Furthermore, the values of R12 and R23 must be proportionally decreased
as well as appropriately modifying the firmware. L1 will also have to
withstand the desired current. Examples:
5 final transistor (10A) R23=15k and R24=1500
2 final transistor (3A) R23=22k and R24=2700

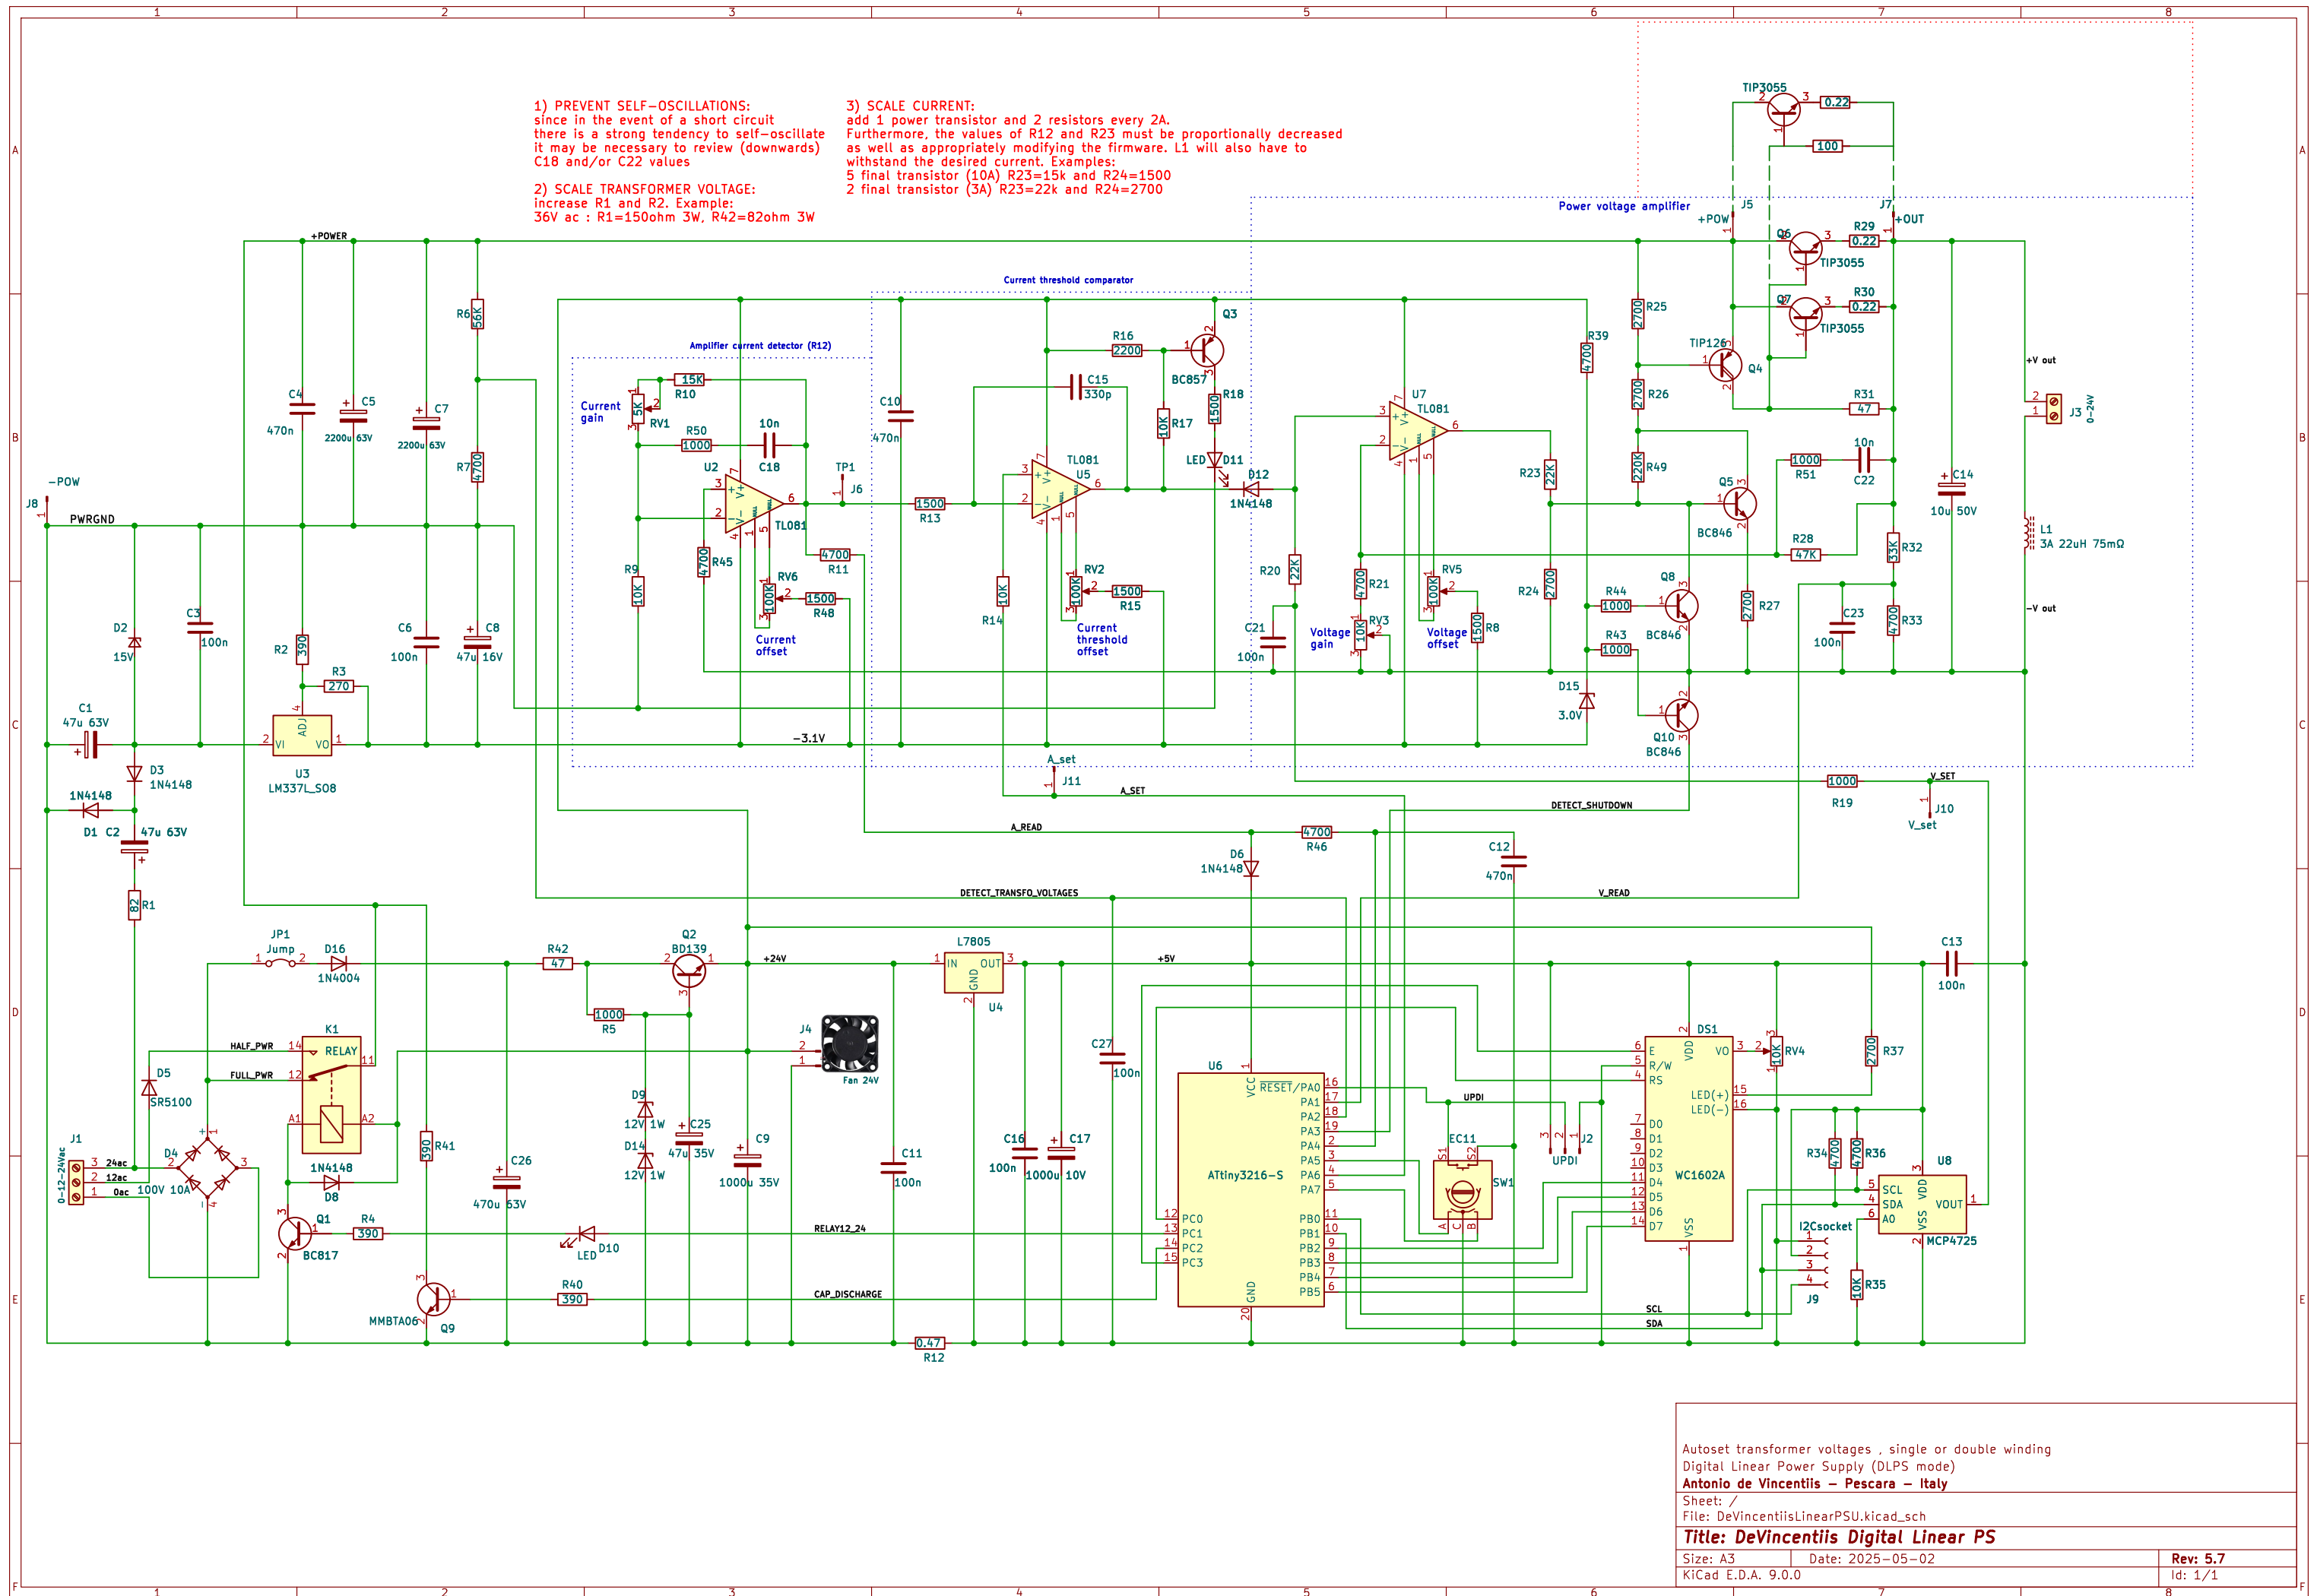

Autoset transformer voltages , single or double winding
Digital Linear Power Supply (DLPS mode)
Antonio de Vincentiis – Pescara – Italy

Sheet: /
File: DeVincentiisLinearPSU.kicad_sch

Title: DeVincentiis Digital Linear PS

Size: A3
KiCad E.D.A. 9.0.0

Date: 2025-05-02

Rev: 5.7
Id: 1/1