

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall Dimensions:**
 - Width: 52.70
 - Height: 90.80
- Internal Dimensions and Spacing:**
 - Distance between top mounting holes: 25.76
 - Distance between bottom mounting holes: 25.76
 - Distance between left mounting holes: 31.64
 - Distance between right mounting holes: 31.64
 - Distance from top edge to top mounting holes: 83.16 ± 0.05 (corners)
 - Distance from bottom edge to bottom mounting holes: 83.16 ± 0.05 (corners)
 - Distance from left edge to left mounting holes: 3.82
 - Distance from right edge to right mounting holes: 3.82
- Mounting Holes:** Four circular mounting holes, one in each corner, with a diameter of 2.0 .
- Central Feature:** A circular feature with a diameter of 2.0 , located in the center of the plate.
- Internal Structure:** The plate contains a series of horizontal lines, likely representing a cooling channel or a structural reinforcement.

✓ MEDALLION (REF — REAR ART BLOCK)

8x M2 THREAD, THRU

Ø1.6 TAP DRILL • TAP FROM BACK FACE

Ø3.0 SPOTFACE, BACK (depth per Detail B)

C3 = hole-pattern pitch ± 0.05 C4 = M2 thread

SECTION A-A → edge profile DETAIL B → corner boss

REAR ART — MACHINED-IN GEOMETRY (REFERENCE; STEP GOVERNS)

REEDED FIN FIELDS x2 (PLAN, dashed zones): 19 RIBS/FIELD, 0.60 WIDE ON 1.399 PITCH; GROOVES Ø0.6 END-MILL ONLY (0.80 WIDE), VALLEY 0.60 BELOW ART FIELD (0.40 WEB); RIB TOPS +0.10 — 0.05 UNDER BEARING PLANE.

MEDALLION (PLAN, circles): Ø25.7 COIN SUNK 0.45 BELOW ART FIELD (Ø0.4 END MILL), COUNTERS/REST 0.25 (Ø0.3 REST PASS); CRESTS (RING TEXT, RIM, HOOP, MONOGRAM, SERIAL) LEFT AT THE FRAME'S BEARING PLANE (-0.15), VERTICAL WALLS, NO DETACHED ISLAND UNDER 0.55. DO NOT EDGE-BREAK CREST EDGES. SERIAL ("No 001") IS PER-UNIT VARIABLE TEXT.


OP ORDER: ALL BACK-FACE FEATURES BEFORE CAVITY HOLLOW (SOLID-STOCK RULE). STRESS-RELIEVED STOCK — STATE CONDITION ON QUOTE.

CRITICAL DIMENSIONS — C1 & C3 TOLERANCED ± 0.05 (MARKED ON VIEWS); ALL OTHER FEATURES PER ISO 2768-1 (MEDIUM)

C1	Cavity depth (boss-top plane → cavity floor)	1.80 ±0.05
C2	PCB-rest plane flatness (lip + 8 bosses)	FLAT 0.05
C3	8× mounting holes (x 45.06; y rows 2.87/28.63/60.27/86.03)	±0.05 (linear)
C4	Mounting holes — tapped, thru, from back	M2 / Ø1.6 drill


NOTES

- | | |
|--|---|
| 1. MATERIAL: TITANIUM Gr5 (TC4) = Ti-6Al-4V GRADE 5. | DWG solar-glow-drh-v3_0-backshell-0p6b-brace
REV v3.0
MATERIAL Ti Gr5 (TC4)
FINISH BEAD-BLAST + LAP (CUSTOMER) |
| 2. FINISH: BEAD-BLAST MATTE, ALL OVER. NO MARKING SERVICE — THE REAR ART (REEDED FIELDS + MEDALLION) IS MACHINED-IN, IN THE STEP (SEE REAR ART BLOCK). BEARING PLANE (FRAME + MEDALLION CRESTS) HAND-LAPPED BY CUSTOMER AFTER BLAST — NO SHOP ACTION. | |
| 3. GENERAL TOLERANCE PER ISO 2768-1 (MEDIUM). C1-C4 TOLERANCED AS LISTED; C1 & C3 = ±0.05. DATUMS: A = LEFT EDGE, B = BOTTOM EDGE, C = PCB-REST PLANE. | |
| 4. BRACE REGISTRATION: THE RESIN H-BRACE REGISTERS TO THIS SHELL BY FITMENT - ITS 4 OUTBOARD RAILS + THE COMPONENT POCKETS + THE BOARD PRESS-FIT. NO LOCATOR PILLARS; THE CAVITY FLOOR IS A FULL 1.00 EVERYWHERE. | |
| 5. EDGE BREAKS - ALL 0.10x45°, FELT NOT SEEN, MODELED. CALLED OUT ON SEC A-A / DETAIL B: RIM = outer rim (top & bottom); MOUTH = recess mouth (around PCB); LIP = inner (cavity-side) lip edge; FRAME = proud back-frame bottom edges; BOSS = boss + spotface bottom edges (Detail B). BREAK ALL OTHER EXPOSED EDGES 0.10x45°. CONCAVE JUNCTION CORNERS (BOSS + SHELL) 0.10x45°. | |
| 6. FLOOR IS A TRUE 1.00, UNIFORM ACROSS THE CAVITY, AT THE ~1.0 TI MIN-WALL GUIDANCE SO IT ALSO CLEARS ALUMINIUM / COPPER / STAINLESS. | |
| 7. NO U7 RELIEF POCKET. U7 IS THE 0.90 mm MB85RC512TY DFN-8, WELL UNDER THE 1.70 CAP-LIMITED CAVITY, SO THE FLOOR IS UNIFORM 1.00. (A POCKET EXISTED FOR A 1.75 SOIC-8 THE v4 BOARD DOES NOT CARRY.) | |
| 8. FRONT SUPPORT LIP IS ASYMMETRIC (SECTION A-A): WEST 2.5 / NORTH 2.0 / SOUTH 2.0 FOR PCB RIGIDITY; EAST 1.0 CLEARING THE JP1/TP1 PADS, THE NFC COIL (A GROUNDED LIP WOULD DETUNE IT), AND C7 (x49.55, THE ONE EAST-EDGE PART LEFT AFTER V4 REMOVED THE Q1/U4/R7/R9 CLAMP CLUSTER + D9/D10/D11); WIDENING TO 2.5 ONLY AT THE SOUTH END (y0-10, CLEAR C7). | |
| 9. NO INTERNAL RIBS OR SUPPORT POSTS: THE RESIN BRACE (SEPARATE PART) CARRIES CENTER SUPPORT. A PCB LAYOUT CHANGE = A BRACE REPRINT, NOT A SHELL RE-MACHINE. | |
| 10. PCB RECESS = 0.60 DEEP (RECEIVES THE 0.60 mm BOARD; SLIP FIT, NOT A PRESS FIT). 3D STEP GOVERNS ALL GEOMETRY; STL NOT FOR CNC. | |
| 11. PART = BACK-SHELL ONLY. PCB, RESIN BRACE, AND 8x M2x3 BRASS SLOTTED-CHEESE SCREWS (HEAD Ø3.8) SUPPLIED SEPARATELY. | |
| UNITS: mm | SCALE: AS NOTED |
| BBOX 52.70 x 90.80 x 3.55 3rd-angle | SHEET 1/1 |

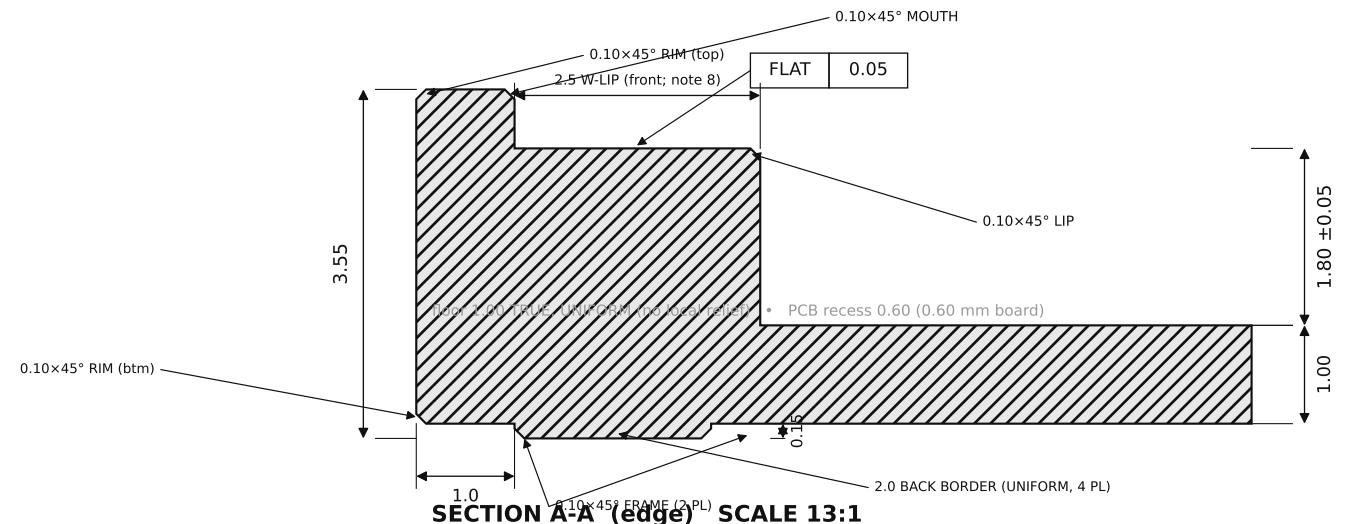

SECTION A-A (edge) SCALE 13:1

C1 = cavity depth C2 = PCB-rest-plane flatness (back face down; PCB drops in from top)
PCB + M2x3 BRASS SCREW — REF, NOT THIS PART

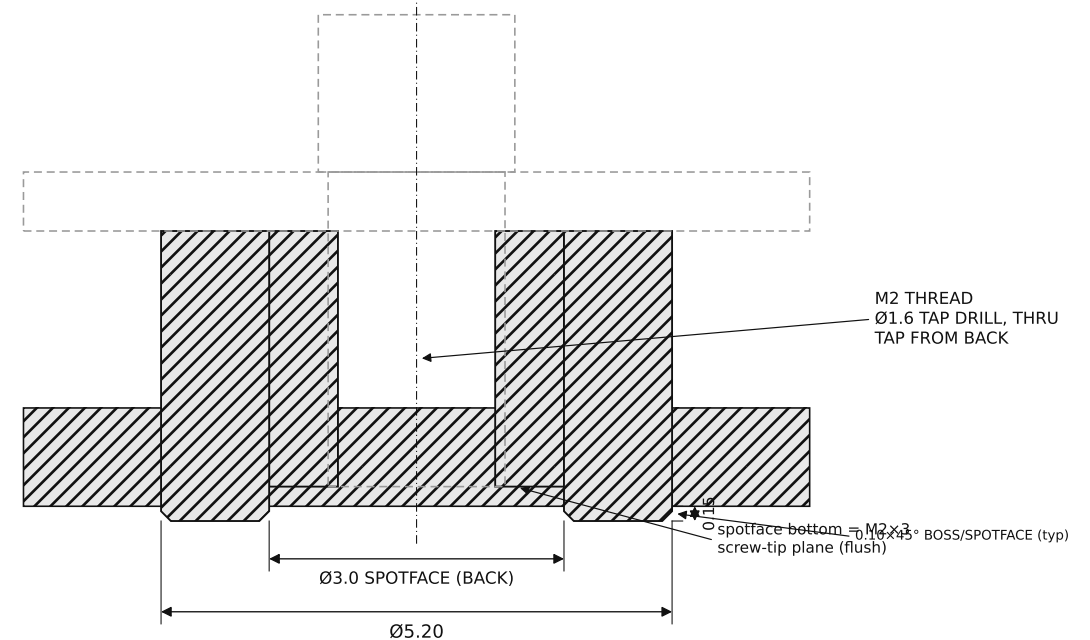

DETAIL B (corner boss) 13:1

GENERAL TOLERANCES (UNLESS OTHERWISE NOTED, mm)	
LINEAR & HOLE-POSITION DIMS	ISO 2768-m
CAVITY DEPTH C1 (SECTION A-A)	1.80 ±0.05
HOLE-PATTERN PITCH C3 (8 HOLES)	x 45.06 / y 25.76-31.64-25.76 ±0.05
PCB-REST FLATNESS C2	FLAT 0.05

SOLAR-GLOW DRH v3.0 — Ti BACK-SHELL (0.6mm-BOARD DUMB BOX)	
BLAST — NO SHOP ACTION. DWG solar-glow-drh-v3_0-backshell-0p6b-brace REV v3.0	
= boss + spotface bottom edges (Detail B). BREAK ALL OTHER EXPOSED EDGES 0.10x45°. CONCAVE JUNCTION CORN MATERIAL Ti Gr5 (TC4) FINISH BEAD-BLAST + LAP (CUSTOMER)	
UNITS: mm	SCALE: AS NOTED
TER V4 REMOVED THE Q1/U4/R7/R9 CLAMP CLUSTER + D9/D10/D11; WIDENING TO 2.5 ONLY AT THE SOUTH END (y0-1 BBOX 52.70 x 90.80 x 3.55 3rd-angle	SHEET 1/1