


BACK FACE (outer) SCALE 1.5:1

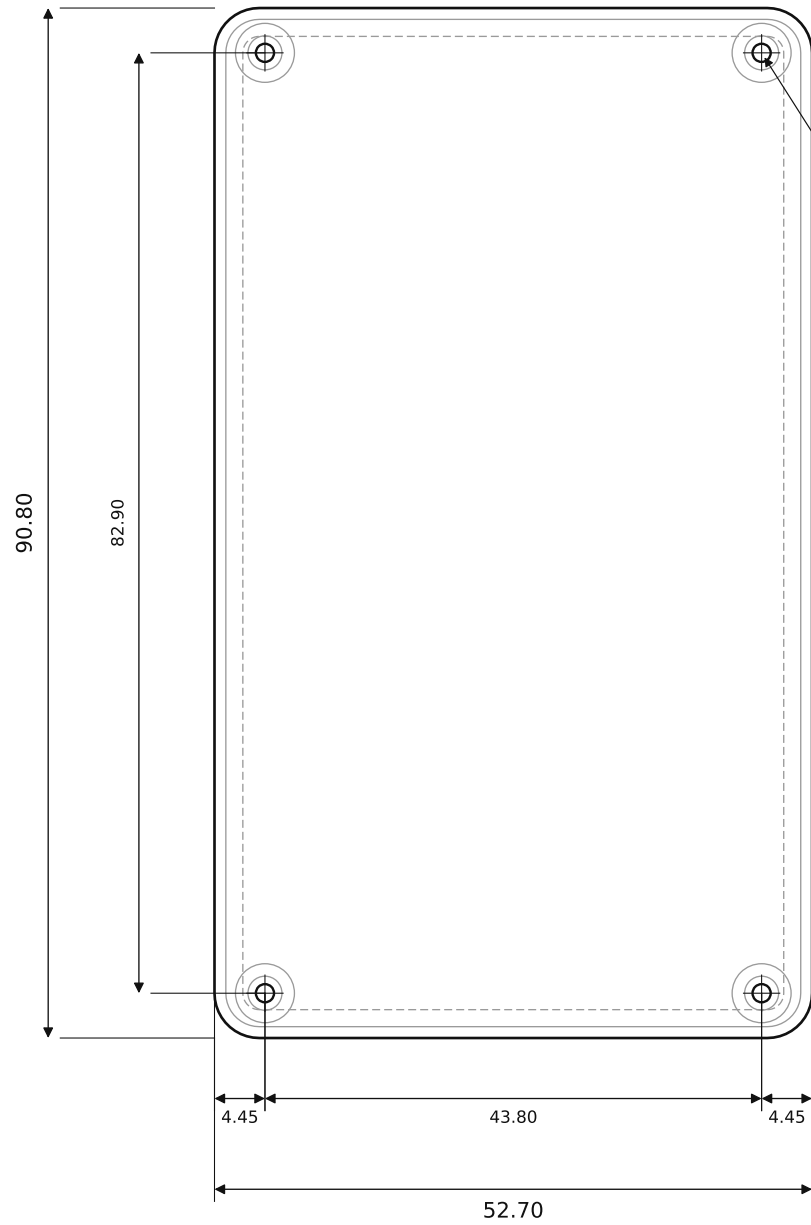

POS	Ø0.10 (M)	A	B
-----	-----------	---	---


4× M2 THREAD, THRU

Ø1.6 TAP DRILL • TAP FROM BACK FACE

Ø3.0 SPOTFACE, BACK (depth per Detail B)

C3 = hole-pattern true position C4 = M2 thread


SECTION A-A → edge profile DETAIL B → corner boss

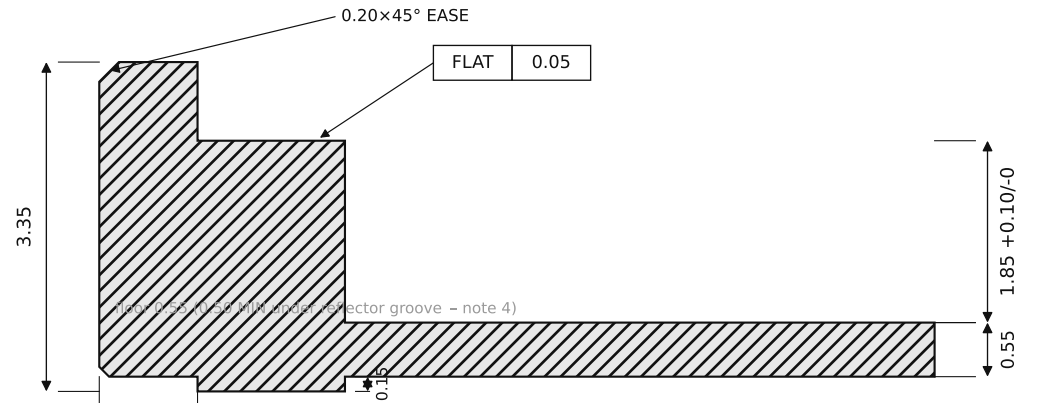

SECTION A-A (edge) SCALE 13:1

C1 = cavity depth C2 = PCB-rest-plane flatness (back face down; PCB drops in from top)

PCB + M2×3 BRASS SCREW — REF, NOT THIS PART

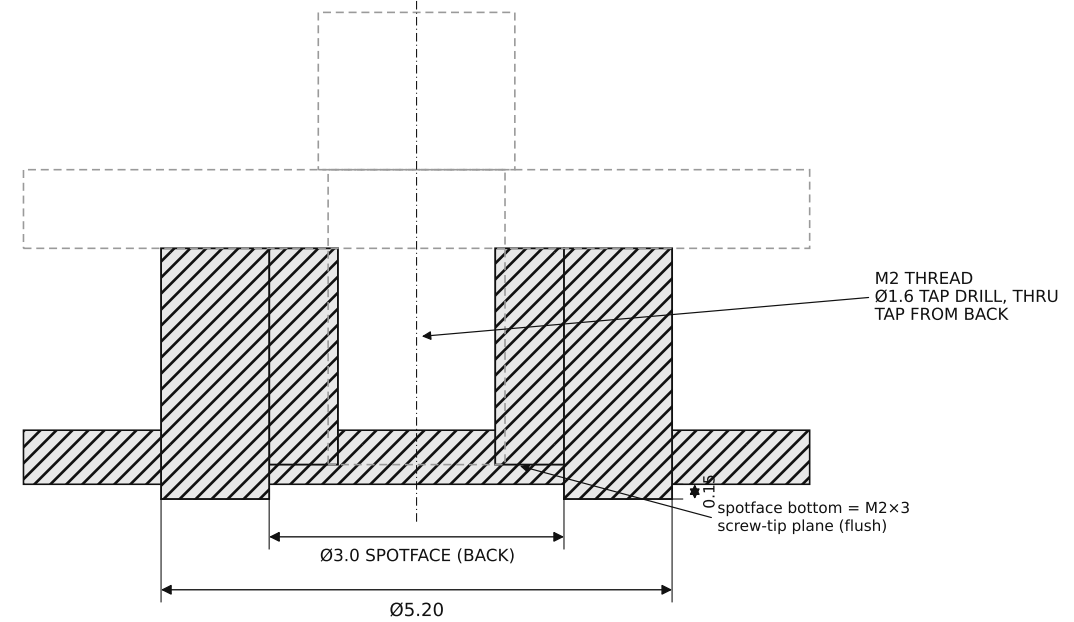

DETAIL B (corner boss, section) SCALE 13:1

CRITICAL DIMENSIONS (control + inspect; all other features ISO 2768-1)

C1	Cavity depth (boss-top plane → cavity floor)	1.85 +0.10 / -0
C2	PCB-rest plane flatness (lip + 4 bosses + 2 ribs)	FLAT 0.05
C3	4× mounting-hole pattern, true position	Ø0.10 (M) to A,B
C4	Mounting holes — tapped, thru, from back	M2 / Ø1.6 drill

NOTES

- MATERIAL: TITANIUM Gr5 (TC4) = Ti-6Al-4V GRADE 5.
- FINISH: AS-MACHINED OR BEAD-BLAST MATTE (CONFIRM). REAR ART LASER-MARKED IN RECESSED FIELD.
- GENERAL TOLERANCE PER ISO 2768-1. ITEMS C1-C4 ARE CRITICAL. DATUMS: A = LEFT EDGE, B = BOTTOM EDGE, C = PCB-REST PLANE.
- REFLECTOR GROOVE 0.25 WIDE x 0.05 DEEP ON CAVITY FLOOR AT MONOGRAM-WINDOW OUTLINE (20.9 x 6.2, CTR OF WINDOW).
MACHINE AS MODELED (FINE-BIT LIGHT ENGRAVE) OR LASER-MARK SAME OUTLINE. NON-STRUCTURAL.
- BREAK ALL SHARP EDGES ~0.1 (Ti). OUTER TOP/BOTTOM RIM EASED 0.20x45° (MODELED).
- THIN-WALL ADVISORY: FLOOR 0.55, REFLECTOR GROOVE LEAVES 0.50 MIN (= ~0.5 BARE-MIN METAL WALL), BELOW THE ~0.8/1.0 Ti MIN-WALL GUIDANCE. IF YOU CANNOT HOLD 0.55, ADVISE THE MIN Ti FLOOR YOU WILL HOLD; PART RE-ISSUED TO THAT VALUE.
- 3D STEP MODEL GOVERNS ALL GEOMETRY. STL IS NOT FOR CNC.
- PART = BACK-SHELL ONLY. PCB AND 4× M2×3 BRASS SLOTTED-CHEESE SCREWS (HEAD Ø3.8) SUPPLIED SEPARATELY.

SOLAR-GLOW DRH v2.1 — TITANIUM BACK-SHELL

DWG solar-glow-drh-v2_1-backshell		REV v2.1
MATERIAL Ti Gr5 (TC4)		FINISH see note 2
UNITS mm	SCALE AS NOTED	
BBOX 52.70 x 90.80 x 3.35 3rd-angle	SHEET 1/1	