


POGO TEST PLATE — top view, board coordinates (green: panel / card; red: probe bosses)    Z stack / build notes

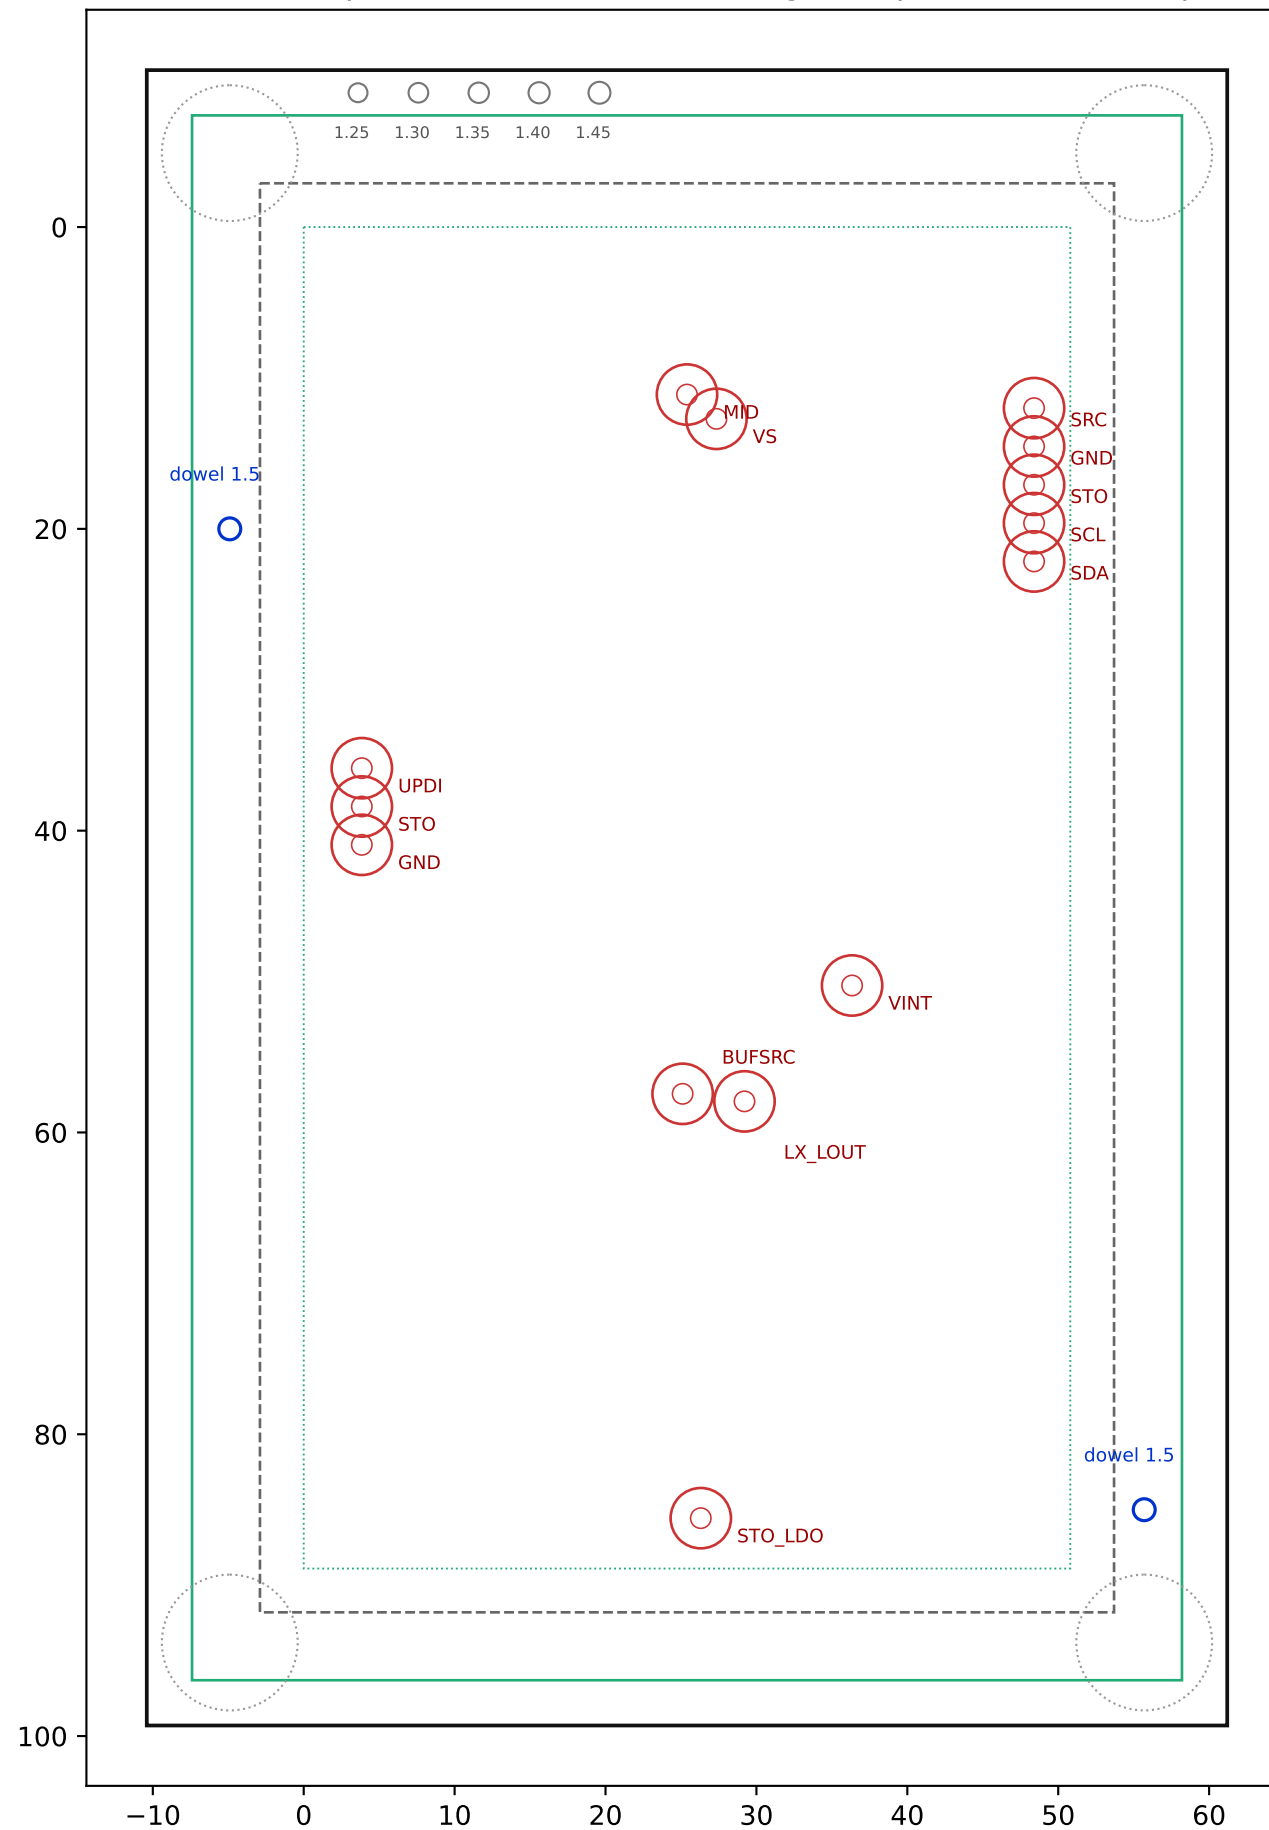

## Z stack / build notes

```

plate top (panel rest)          10.00
boss top (collar seat)         5.70
cavity floor                    4.00
plate bottom                    0.00
bench (legs)                   -17.80

probe compression               1.20
EXPOSED_FREE                   5.50  << MEASURE on a real P75+R75 pair
receptacle bore                 1.35  << set from the fit coupon (1.25-1.45)
dowels                          2x dia 1.5 through TH1/TH2 (-4.9,20) / (55.7,85)
boss-top to parts               2.45 clear (supercaps drop 1.85)

hardware: P75-E2 probes (stroke 2.50 full),
R75-3W wire-wrap receptacles (OD 1.32,
collar 5.0, ~26.5 long). Set SW2 before
seating the panel.

hookup (tails, below the plate):
  UPDI prog    SNAP/PICKit: UPDI+GND at the
                J1 column, VTG ref -> VS
  I2C tap      SCL / SDA / GND (JP1 column;
                4.7k pull-ups to VS on-board)
  power in     ST0 (J1 or JP1), return GND
                (TC1 from the top stays the alternative)

```