
PLAN — FROM THE BACK (OPEN FRAME, NO BACK FACE) SCALE 1.5:1

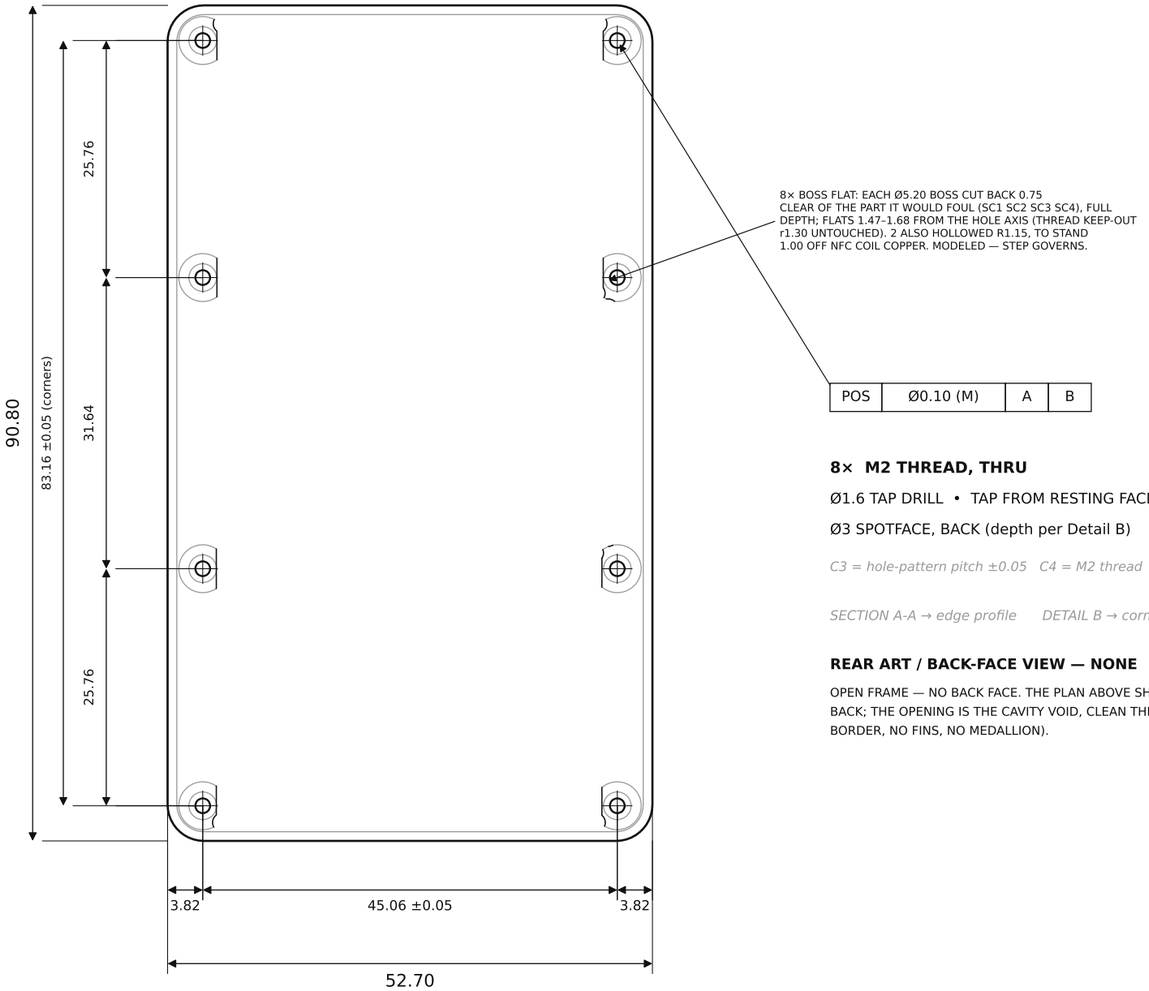

8× BOSS FLAT: EACH Ø5.20 BOSS CUT BACK 0.75 CLEAR OF THE PART IT WOULD FOUL (SC1 SC2 SC3 SC4), FULL DEPTH; FLATS 1.47–1.68 FROM THE HOLE AXIS (THREAD KEEP-OUT r1.30 UNTOUCHED). 2 ALSO HOLLOWED R1.15, TO STAND 1.00 OFF NFC COIL COPPER. MODELED — STEP GOVERNS.

POS	Ø0.10 (M)	A	B

8× M2 THREAD, THRU

Ø1.6 TAP DRILL • TAP FROM RESTING FACE (BACK)


Ø3 SPOTFACE, BACK (depth per Detail B)

C3 = hole-pattern pitch ±0.05   C4 = M2 thread

SECTION A-A → edge profile   DETAIL B → corner boss

REAR ART / BACK-FACE VIEW — NONE

OPEN FRAME — NO BACK FACE. THE PLAN ABOVE SHOWS THE FRAME FROM THE BACK; THE OPENING IS THE CAVITY VOID, CLEAN THROUGH (NO FLOOR, NO BORDER, NO FINS, NO MEDALLION).

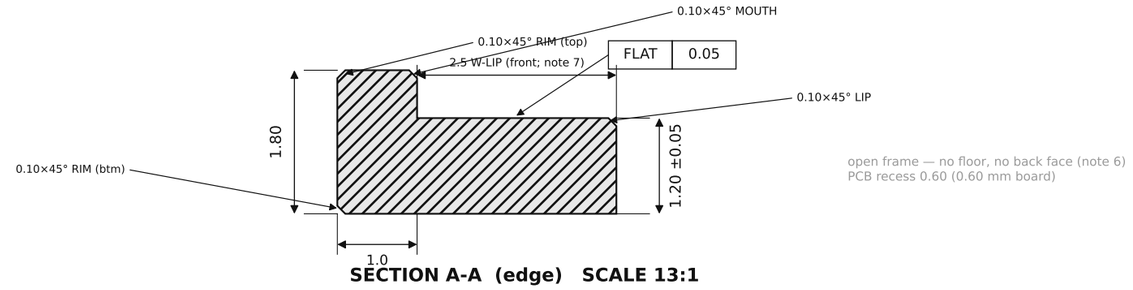


open frame — no floor, no back face (note 6)
PCB recess 0.60 (0.60 mm board)

SECTION A-A (edge) SCALE 13:1

C1 = frame depth   C2 = PCB-rest-plane flatness   (open frame; PCB drops in from top)

PCB + M2×1.6 BRASS SCREW — REF, NOT THIS PART

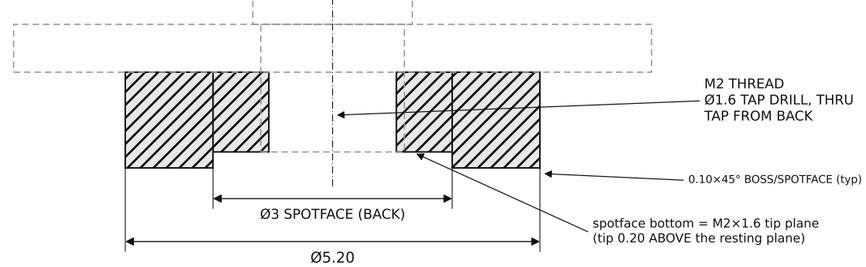

DETAIL B (corner boss) 13:1

CRITICAL DIMENSIONS — C1 & C3 TOLERANCED ±0.05 (MARKED ON VIEWS); ALL OTHER FEATURES PER ISO 2768-1 (MEDIUM)

C1	Frame depth (PCB-rest plane → resting plane; OPEN FRAME)	1.20 ±0.05
C2	PCB-rest plane flatness (lip + 8 bosses)	FLAT 0.05
C3	8× mounting holes (x 45.06; y rows 2.87/28.63/60.27/86.03)	±0.05 (linear)
C4	Mounting holes — tapped, thru, from back	M2 / Ø1.6 drill

NOTES

1. MATERIAL: 316L STAINLESS (AUSTENITIC, MU_R~1.02 -- NOT CARBON/MARTENSITIC STEEL).
2. FINISH: BEAD-BLAST MATTE, ALL OVER. NO MARKING SERVICE — OPEN FRAME: NO BACK FACE, NO REAR ART.
3. GENERAL TOLERANCE PER ISO 2768-1 (MEDIUM). C1-C4 TOLERANCED AS LISTED; C1 & C3 = ±0.05. DATUMS: A = LEFT EDGE, B = BOTTOM EDGE, C = PCB-REST PLANE.
4. NO BRACE: AN OPEN FRAME HAS NO FLOOR TO RETAIN ONE (fit_rules.VARIANTS: brace_name=None). THE PCB REGISTERS IN THE 0.60 RECESS AND ON THE 8 BOSSES.
5. EDGE BREAKS - ALL 0.10x45°, FELT NOT SEEN. MODELED, CALLED OUT ON SEC A-A / DETAIL B: RIM = outer rim (top & bottom); MOUTH = recess mouth (around PCB); BOSS = boss + spotface bottom edges (Detail B). LIP = inner (cavity-side) lip edge: BREAK EVERY LIP EDGE ON THE PART, WHETHER OR NOT THE MODEL SHOWS IT. BREAK ALL OTHER EXPOSED EDGES 0.10x45°. CONCAVE JUNCTION CORNERS LEFT SHARP IN THE MODEL: FINISH WITH A Ø2.0 mm TOOL = R1.0 AS-MILLED; ALL CLEARANCES ALLOW FOR IT (BOSS-CORNER Ø2.0 BORES MODELED). SMALLER IS FINE, LARGER IS NOT. DEBURR 316L WITH SHARP TOOLS, SINGLE PASSES - AUSTENITIC STAINLESS WORK-HARDENS UNDER A RUBBING DEBURR.
6. NO FLOOR - OPEN FRAME. THE BACK OF EVERY B-SIDE COMPONENT FACES THE TABLE; THE FRAME'S RESTING PLANE (BOTTOM FACE) CARRIES THE ASSEMBLY. DEPTH 1.20 = TALLEST B-SIDE PART 1.00 + 2×0.10 RESTING CLEARANCE (fit_rules.VARIANTS: resting-clearance-limited).
7. FRONT SUPPORT LIP IS CUT PER BAND TO CLEAR B-SIDE PARTS (SECTION A-A: THE WEST LIP AT FULL WIDTH). WIDTHS FROM THE BOARD EDGE, POSITIONS IN BOARD x/y, LIMITER IN BRACKETS: WEST 2.50; 2.32 y44.5–47.5 (R16), 2.25 y47.5–50.5 (C24). EAST 1.25 FULL LENGTH (NFC COIL, JP1, TP1). SOUTH 2.00; NONE x3.0–23.5 (SC1), x27.0–47.5 (SC2). NORTH 2.00; NONE x3.5–23.5 (SC3), x27.5–47.5 (SC4). A BAND STOPS 0.30 SHORT OF ITS PART, AND 1.00 SHORT OF NFC COIL COPPER (GROUNDED METAL OVER THE COIL WOULD DETUNE IT). STEPS BLEND AT R1.00. NO EXTERIOR BACK BORDER — THE OPEN FRAME HAS NO BACK FACE.
8. NO INTERNAL RIBS, SUPPORT POSTS, OR BRACE: OPEN FRAME. THE BOARD SPANS FREE BETWEEN THE LIP AND THE 8 BOSSES — HANDLE THE ASSEMBLY ACCORDINGLY.
9. PCB RECESS = 0.60 DEEP, RECEIVES THE 0.60 mm BOARD (RECESS 50.70 x 88.80 FOR A 50.80 x 88.90 BOARD: 0.05 INTERFERENCE PER FLAT AS MODELLED - A PRESS FIT BY DESIGN). 3D STEP GOVERNS ALL GEOMETRY; STL NOT FOR CNC.
10. PART = OPEN FRAME ONLY. PCB, AND 8× M2×1.6 BRASS SLOTTED-CHEESE SCREWS (HEAD Ø3.8) SUPPLIED SEPARATELY.

GENERAL TOLERANCES (UNLESS OTHERWISE NOTED, mm)

LINEAR & HOLE-POSITION DIMS	**ISO 2768-m**
FRAME DEPTH C1 (SECTION A-A)	**1.20 ±0.05**
HOLE-PATTERN PITCH C3 (8 HOLES)	**x 45.06 / y 25.76-31.64-25.76 ±0.05**
PCB-REST FLATNESS C2	**FLAT 0.05**

SOLAR-GLOW DRH — AIR OPEN FRAME (316L, NO BACK FACE)

DWG solar-glow-drh-frame-air-316L	REV air
MATERIAL 316L stainless	FINISH BEAD-BLAST MATTE
UNITS mm	SCALE AS NOTED
BBOX 52.70 x 90.80 x 1.80 3rd-angle	SHEET 1/1