


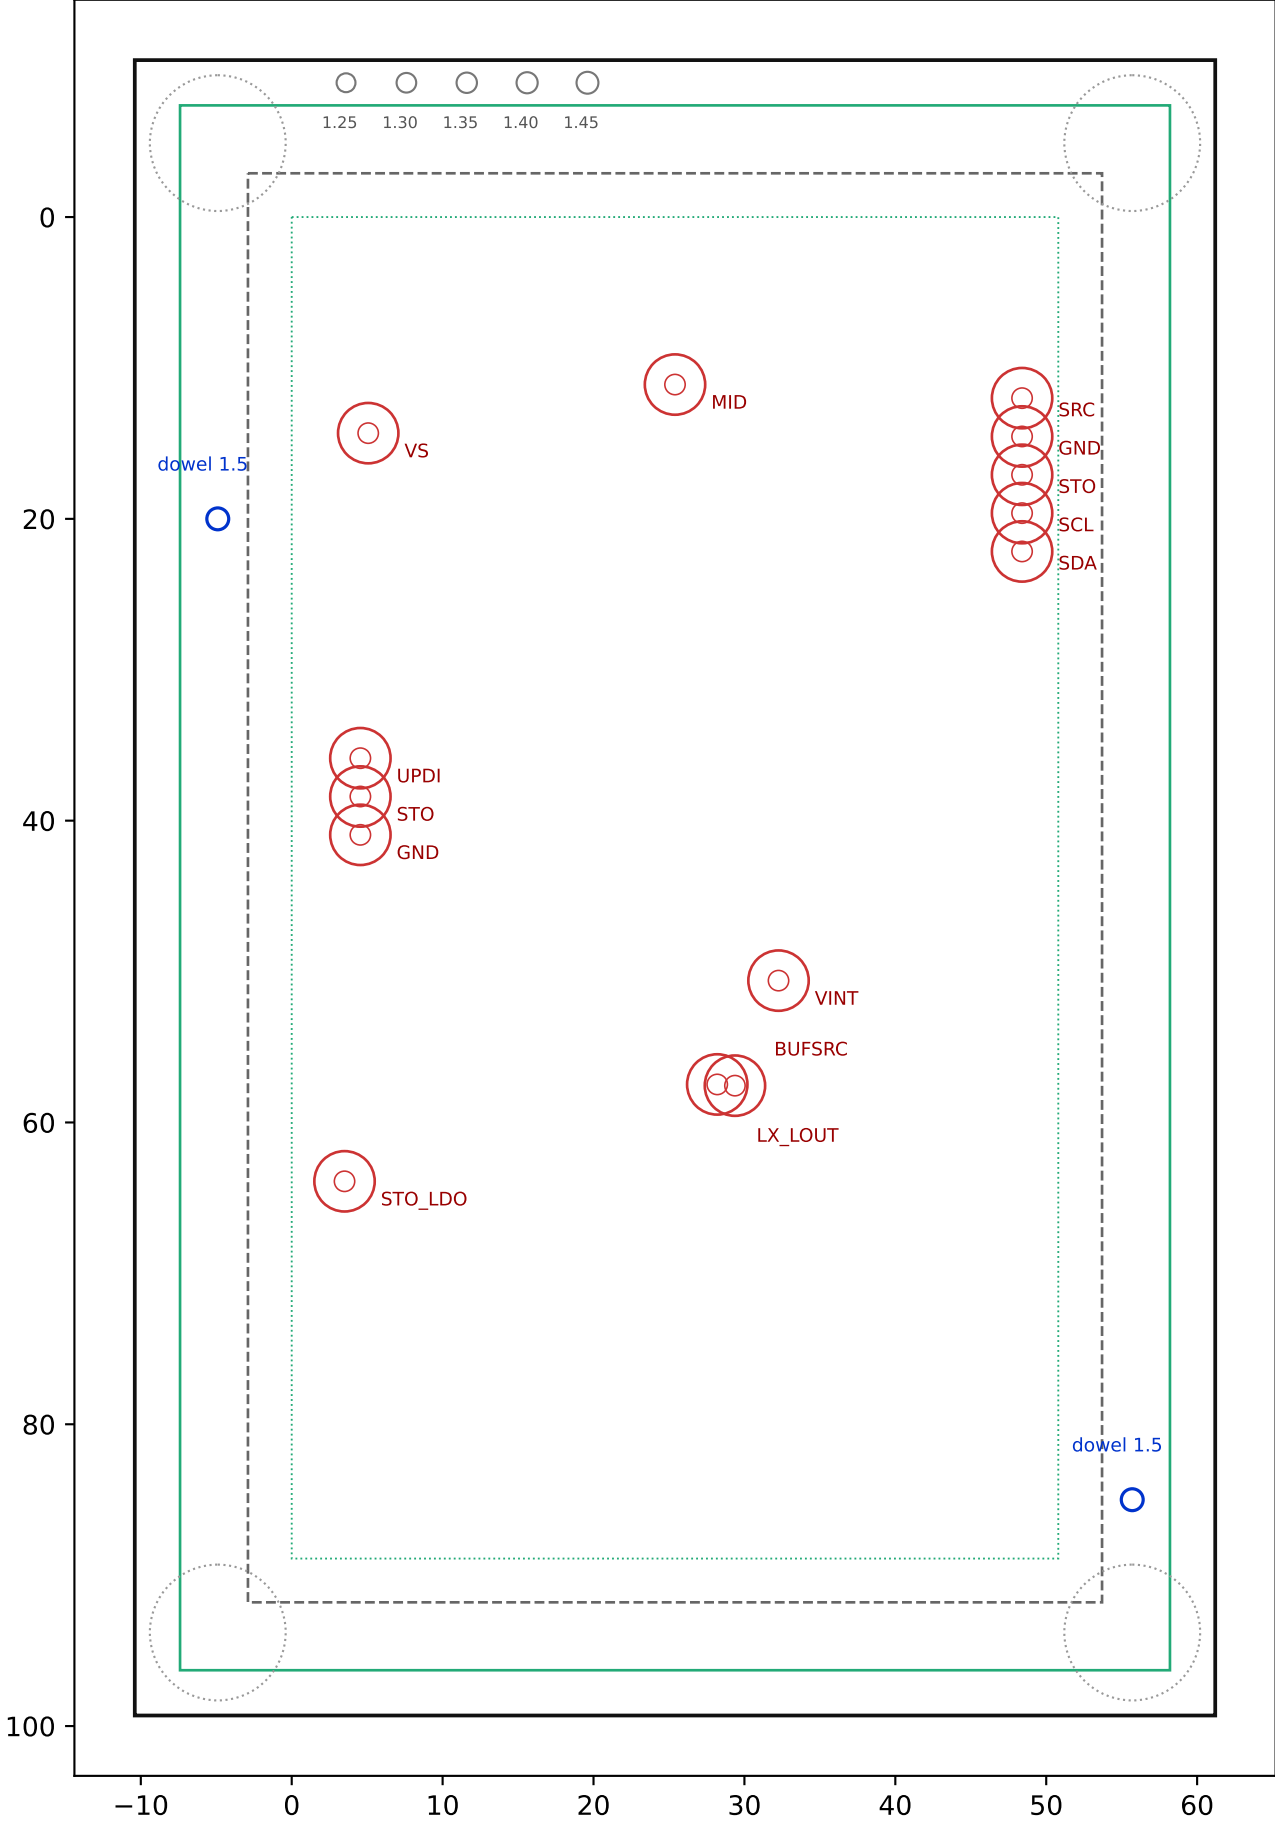

|                        |        |
|------------------------|--------|
| plate top (panel rest) | 10.00  |
| boss top (collar seat) | 5.70   |
| cavity floor           | 4.00   |
| plate bottom           | 0.00   |
| bench (legs)           | -17.80 |

probe compression 1.20  
EXPOSED\_FREE 5.50 << MEASURE on a real P75+R75 pair  
receptacle bore 1.35 << set from the fit coupon (1.25-1.45)  
dowels 2x dia 1.5 through TH1/TH2 (-4.9,20) / (55.7,85)  
boss-top to parts 2.45 clear (supercaps drop 1.85)

hardware: P75-E2 probes (stroke 2.50 full),  
R75-3W wire-wrap receptacles (OD 1.32,  
collar 5.0, ~26.5 long). Set SW2 before  
seating the panel.

hookup (tails, below the plate):  
UPDI prog SNAP/PICKit: UPDI+GND at the  
J1 column, VTG ref -> VS  
I2C tap SCL / SDA / GND (JP1 column;  
4.7k pull-ups to VS on-board)  
power in STO (J1 or JP1), return GND  
(TC1 from the top stays the alternative)