
PLAN — FROM THE BACK (OPEN FRAME, NO BACK FACE) SCALE 1.5:1

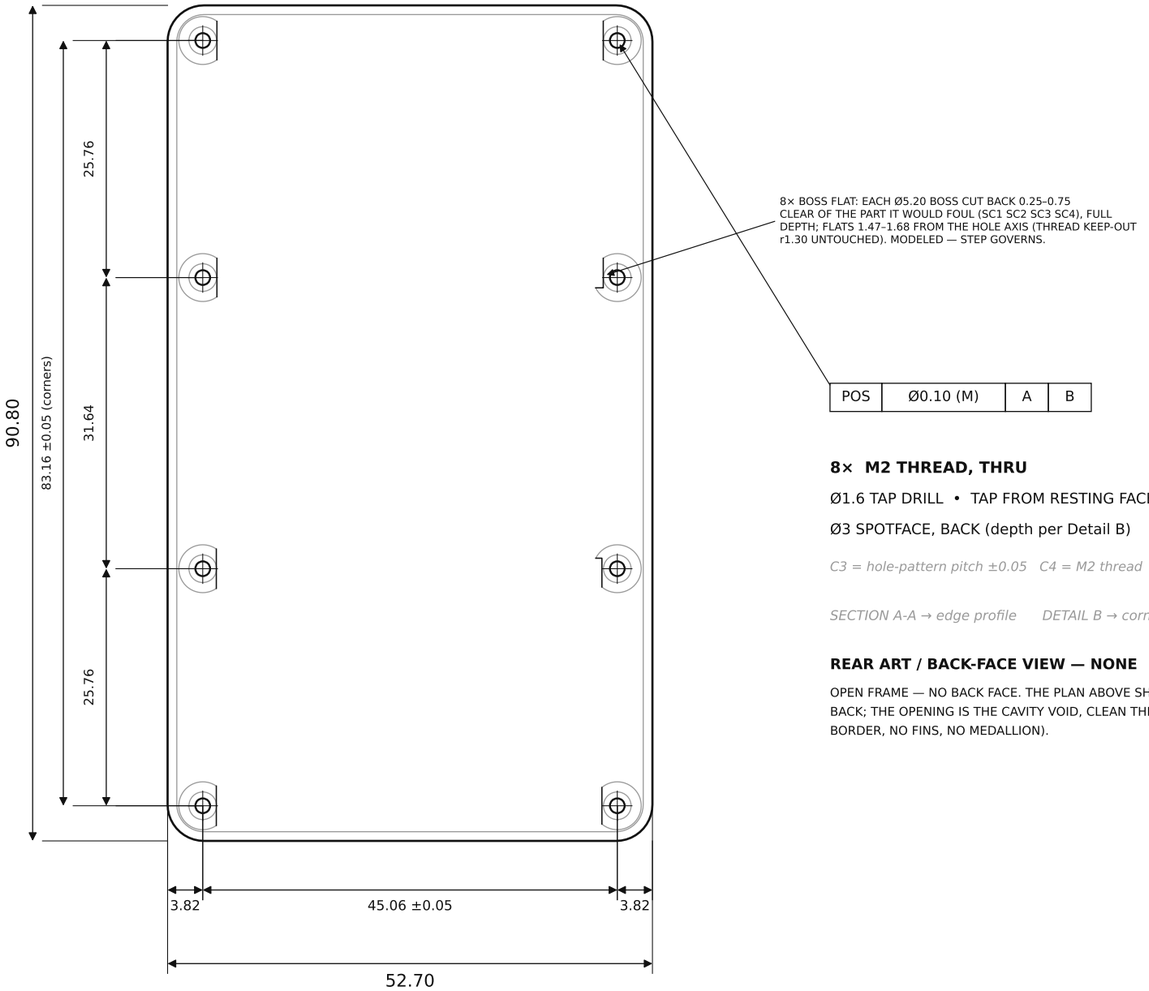

8× M2 THREAD, THRU

Ø1.6 TAP DRILL • TAP FROM RESTING FACE (BACK)


Ø3 SPOTFACE, BACK (depth per Detail B)

C3 = hole-pattern pitch ±0.05   C4 = M2 thread

SECTION A-A → edge profile   DETAIL B → corner boss

REAR ART / BACK-FACE VIEW — NONE

OPEN FRAME — NO BACK FACE. THE PLAN ABOVE SHOWS THE FRAME FROM THE BACK; THE OPENING IS THE CAVITY VOID, CLEAN THROUGH (NO FLOOR, NO BORDER, NO FINS, NO MEDALLION).

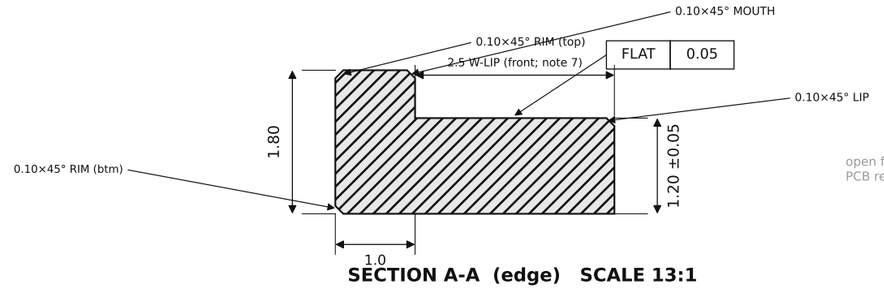


open frame — no floor, no back face (note 6)
PCB recess 0.60 (0.60 mm board)

SECTION A-A (edge) SCALE 13:1

C1 = frame depth   C2 = PCB-rest-plane flatness   (open frame; PCB drops in from top)

PCB + M2×1.6 BRASS SCREW — REF, NOT THIS PART

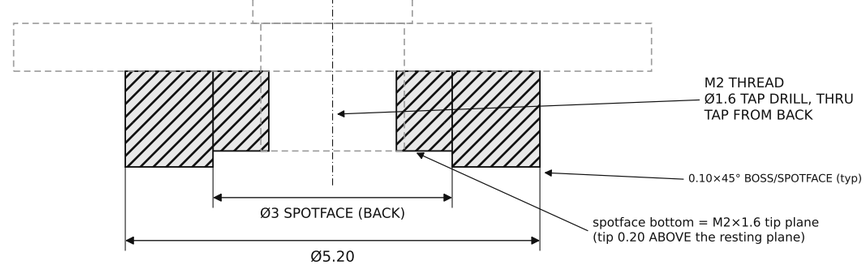

DETAIL B (corner boss) 13:1

CRITICAL DIMENSIONS — C1 & C3 TOLERANCED ±0.05 (MARKED ON VIEWS); ALL OTHER FEATURES PER ISO 2768-1 (MEDIUM)

C1	Frame depth (PCB-rest plane → resting plane; OPEN FRAME)	1.20 ±0.05
C2	PCB-rest plane flatness (lip + 8 bosses)	FLAT 0.05
C3	8× mounting holes (x 45.06; y rows 2.87/28.63/60.27/86.03)	±0.05 (linear)
C4	Mounting holes — tapped, thru, from back	M2 / Ø1.6 drill

NOTES

1. MATERIAL: 316L STAINLESS (AUSTENITIC, MU_R~1.02 -- NOT CARBON/MARTENSITIC STEEL).
2. FINISH: BEAD-BLAST MATTE, ALL OVER. NO MARKING SERVICE — OPEN FRAME: NO BACK FACE, NO REAR ART.
3. GENERAL TOLERANCE PER ISO 2768-1 (MEDIUM). C1-C4 TOLERANCED AS LISTED; C1 & C3 = ±0.05. DATUMS: A = LEFT EDGE, B = BOTTOM EDGE, C = PCB-REST PLANE.
4. NO BRACE: AN OPEN FRAME HAS NO FLOOR TO RETAIN ONE (fit_rules.VARIANTS: brace_name=None). THE PCB REGISTERS IN THE 0.60 RECESS AND ON THE 8 BOSSES.
5. EDGE BREAKS - ALL 0.10x45°, FELT NOT SEEN. MODELED, CALLED OUT ON SEC A-A / DETAIL B: RIM = outer rim (top & bottom); MOUTH = recess mouth (around PCB); BOSS = boss + spotface bottom edges (Detail B). LIP = inner (cavity-side) lip edge: BREAK EVERY LIP EDGE ON THE PART, WHETHER OR NOT THE MODEL SHOWS IT. BREAK ALL OTHER EXPOSED EDGES 0.10x45°. CONCAVE JUNCTION CORNERS LEFT SHARP IN THE MODEL: FINISH WITH A Ø2.0 mm TOOL = R1.0 AS-MILLED. DEBURR 316L WITH SHARP TOOLS, SINGLE PASSES - AUSTENITIC STAINLESS WORK-HARDENS UNDER A RUBBING DEBURR.
6. NO FLOOR - OPEN FRAME. THE BACK OF EVERY B-SIDE COMPONENT FACES THE TABLE; THE FRAME'S RESTING PLANE (BOTTOM FACE) CARRIES THE ASSEMBLY. DEPTH 1.20 = TALLEST B-SIDE PART 1.00 + 2×0.10 RESTING CLEARANCE (fit_rules.VARIANTS: resting-clearance-limited).
7. FRONT SUPPORT LIP IS CUT PER BAND TO CLEAR B-SIDE PARTS (SECTION A-A: THE WEST LIP AT FULL WIDTH). WIDTHS FROM THE BOARD EDGE, POSITIONS IN BOARD x/y, LIMITER IN BRACKETS: WEST 2.50; 2.32 y45.5–48.5 (R16), 2.25 y48.5–49.5 (C24). EAST 1.25 FULL LENGTH (NFC COIL, JP1, TP1). SOUTH 2.00; NONE x4.3–22.9 (SC1), x27.8–46.3 (SC2). NORTH 2.00; NONE x4.4–22.9 (SC3), x27.9–46.4 (SC4). A BAND STOPS 0.30 SHORT OF ITS PART, OR 1.30 WHERE THE Ø2.0 TOOL COULD NOT CLEAR IT, AND 1.00 SHORT OF NFC COIL COPPER (GROUNDED METAL OVER THE COIL WOULD DETUNE IT). STEPS BLEND AT R1.00. NO EXTERIOR BACK BORDER — THE OPEN FRAME HAS NO BACK FACE.
8. NO INTERNAL RIBS, SUPPORT POSTS, OR BRACE: OPEN FRAME. THE BOARD SPANS FREE BETWEEN THE LIP AND THE 8 BOSSES — HANDLE THE ASSEMBLY ACCORDINGLY.
9. PCB RECESS = 0.60 DEEP, RECEIVES THE 0.60 mm BOARD (RECESS 50.70 x 88.80 FOR A 50.80 x 88.90 BOARD: 0.05 INTERFERENCE PER FLAT AS MODELLED). 3D STEP GOVERNS ALL GEOMETRY; STL NOT FOR CNC.
10. PART = OPEN FRAME ONLY. PCB, AND 8× M2×1.6 BRASS SLOTTED-CHEESE SCREWS (HEAD Ø3.8) SUPPLIED SEPARATELY.

GENERAL TOLERANCES (UNLESS OTHERWISE NOTED, mm)

LINEAR & HOLE-POSITION DIMS	**ISO 2768-m**
FRAME DEPTH C1 (SECTION A-A)	**1.20 ±0.05**
HOLE-PATTERN PITCH C3 (8 HOLES)	**x 45.06 / y 25.76-31.64-25.76 ±0.05**
PCB-REST FLATNESS C2	**FLAT 0.05**

SOLAR-GLOW DRH — AIR OPEN FRAME (316L, NO BACK FACE)

DWG solar-glow-drh-frame-air-316L	REV air
MATERIAL 316L stainless	FINISH BEAD-BLAST MATTE
UNITS mm	SCALE AS NOTED
BBOX 52.70 x 90.80 x 1.80 3rd-angle	SHEET 1/1