


POGO TEST PLATE — top view, board coordinates (green: panel / card; red: probe bosses)

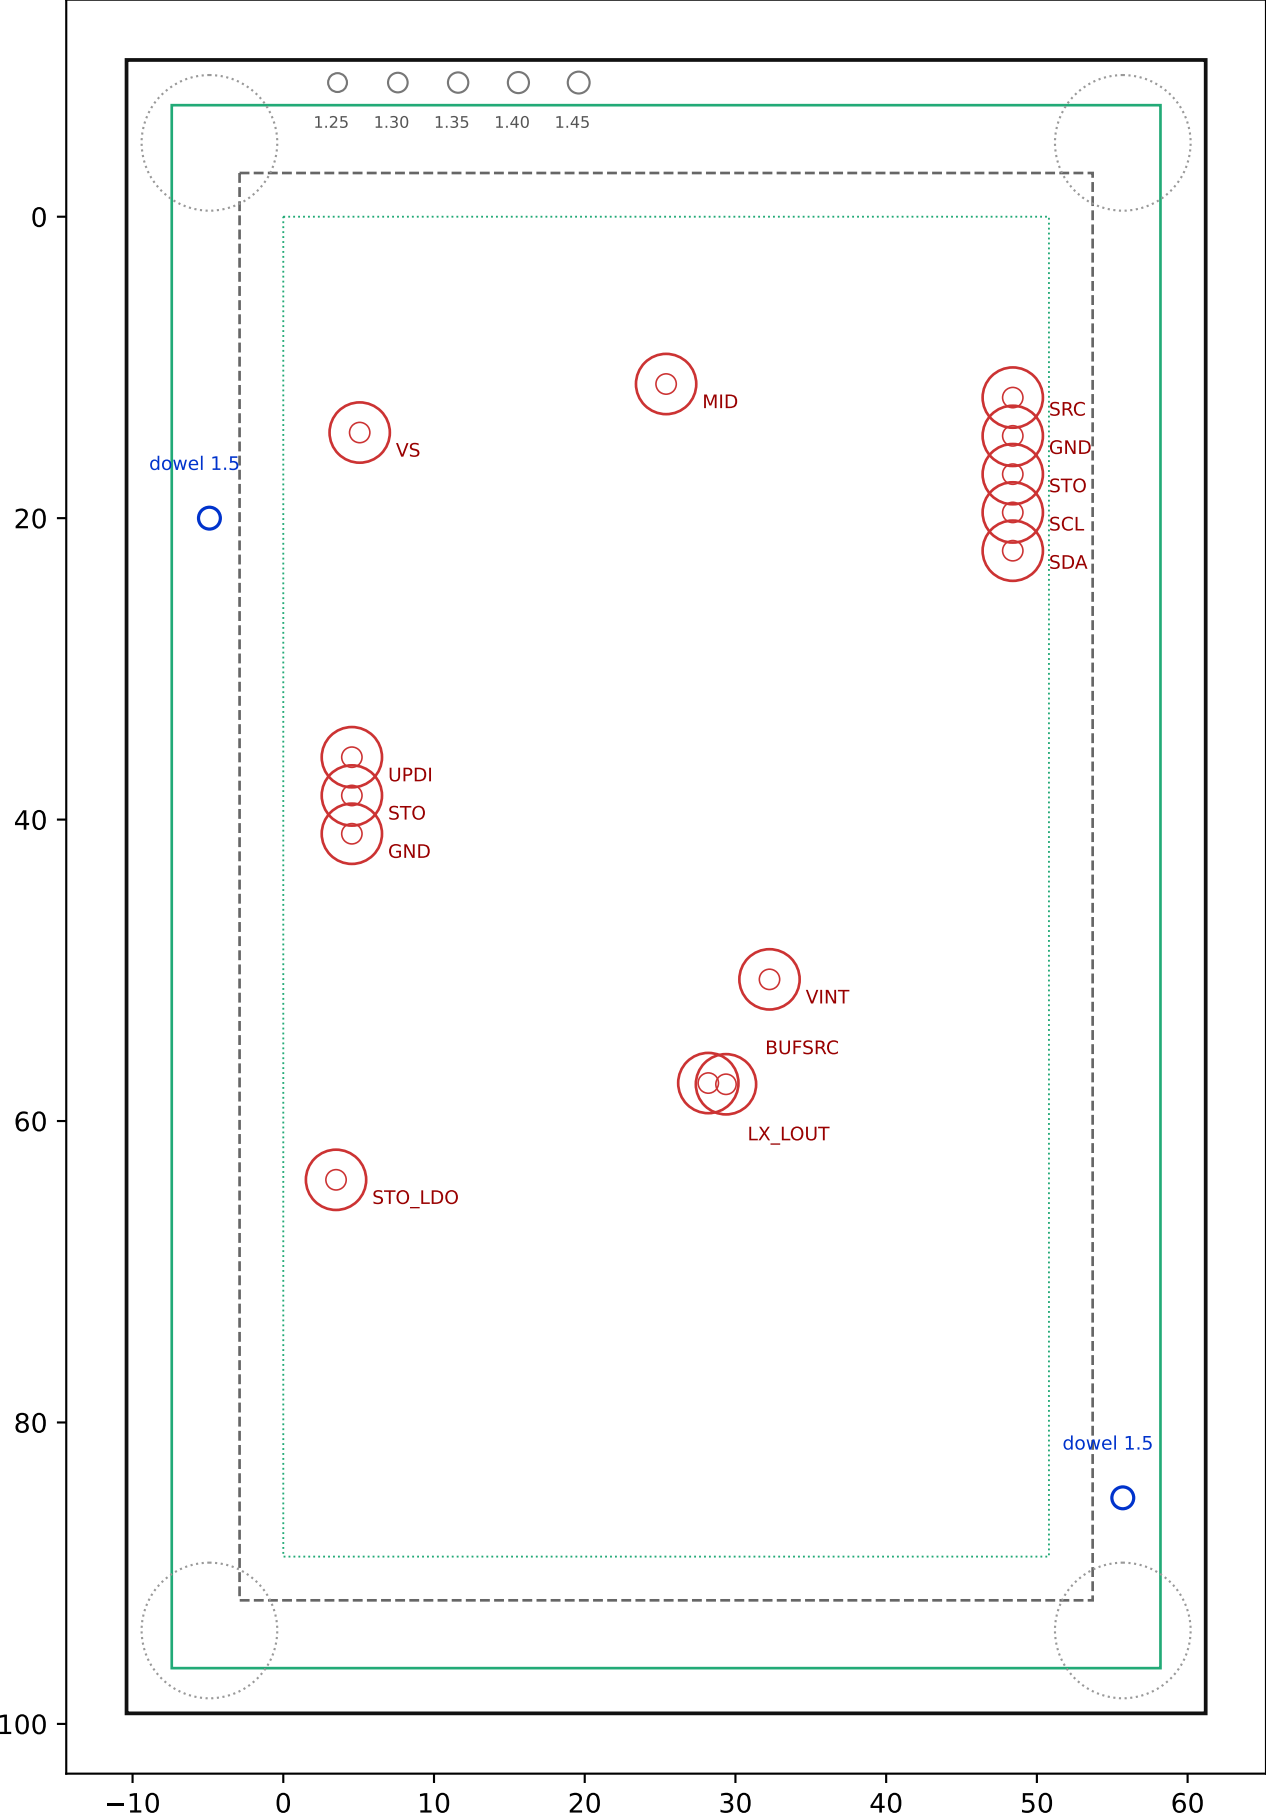

Z stack / build notes

plate top (panel rest) 10.00
boss top (collar seat) 5.70
cavity floor 4.00
plate bottom 0.00
bench (legs) -17.80

probe compression 1.20
EXPOSED FREE 5.50 << MEASURE on a real P75+R75 pair
receptacle bore 1.35 << set from the fit coupon (1.25-1.45)
dowels 2x dia 1.5 through TH1/TH2 (-4.9,20) / (55.7,85)
boss-top to parts 2.45 clear (supercaps drop 1.85)

hardware: P75-E2 probes (stroke 2.50 full),
R75-3W wire-wrap receptacles (OD 1.32,
collar 5.0, ~26.5 long). Set SW2 before
seating the panel.

hookup (tails, below the plate):
UPDI prog SNAP/PICKit: UPDI+GND at the
J1 column, VTG ref -> VS
I2C tap SCL / SDA / GND (JP1 column;
4.7k pull-ups to VS on-board)
power in ST0 (J1 or JP1), return GND
(TC1 from the top stays the alternative)