


POGO TEST PLATE — top view, board coordinates (green: panel / card; red: probe bosses) Z stack / build notes

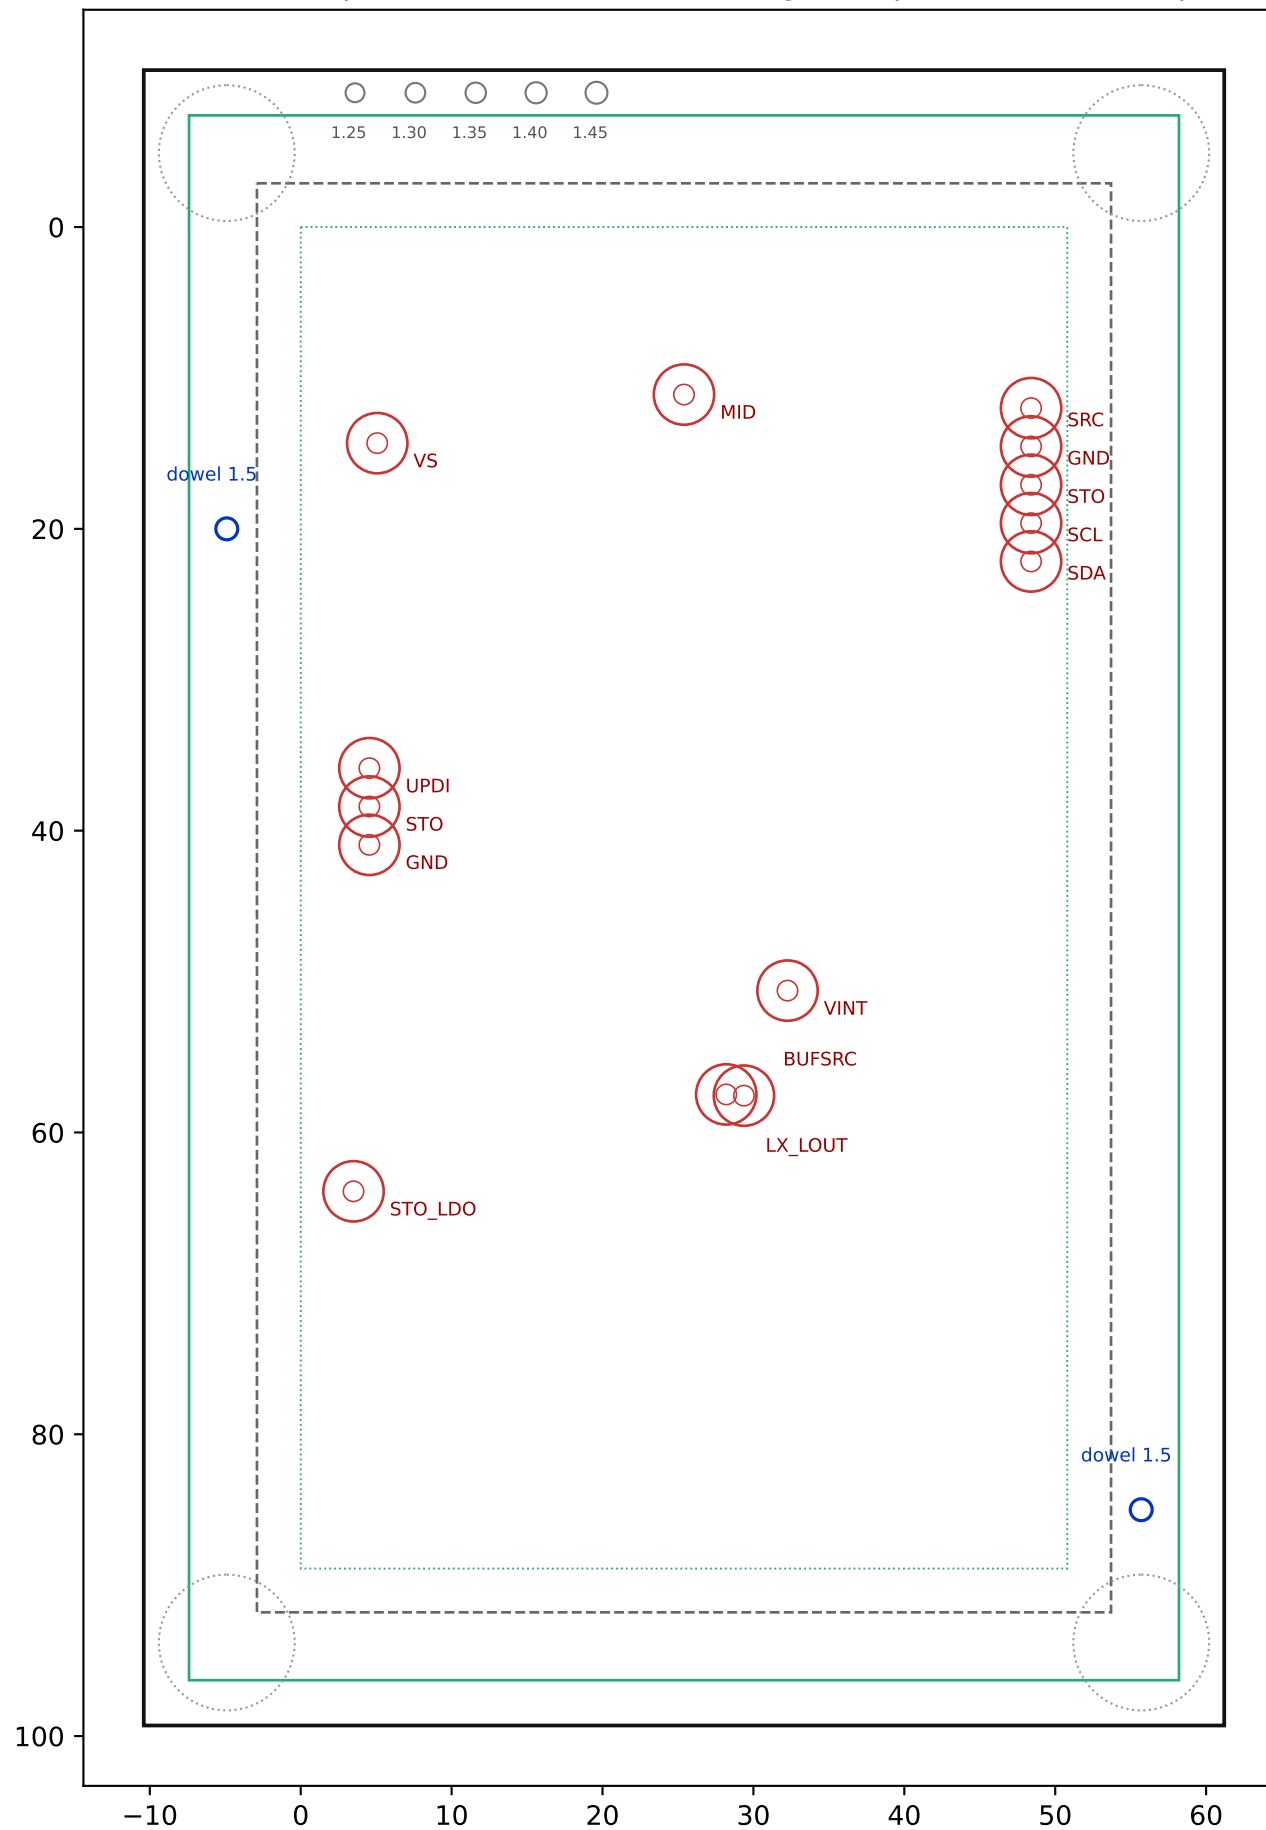

Z stack / build notes

plate top (panel rest)	10.00	
boss top (collar seat)	5.70	
cavity floor	4.00	
plate bottom	0.00	
bench (legs)	-17.80	
probe compression	1.20	
EXPOSED_FREE	5.50	<< MEASURE on a real P75+R75 pair
receptacle bore	1.35	<< set from the fit coupon (1.25-1.45)
dowels	2x dia 1.5	through TH1/TH2 (-4.9,20) / (55.7,85)
boss-top to parts	2.45	clear (supercaps drop 1.85)

hardware: P75-E2 probes (stroke 2.50 full),
R75-3W wire-wrap receptacles (OD 1.32,
collar 5.0, ~26.5 long). Set SW2 before
seating the panel.

```
hookup (tails, below the plate):
  UPDI prog      SNAP/PICkit: UPDI+GND at the
                  J1 column, VTG ref -> VS
  I2C tap        SCL / SDA / GND (JP1 column;
                  4.7k pull-ups to VS on-board)
  power in       ST0 (J1 or JP1), return GND
                  (TC1 from the top stays the alternative)
```