
Molded Case Circuit Breakers


What's **new** in molded case circuit breakers:


Siemens BL and NGB circuit breaker families are now eligible to be marked "NAVAL" for use on non-combat vessels. These breakers meet the requirements of UL 489 Supplement SB. Consult your local sales office for availability.

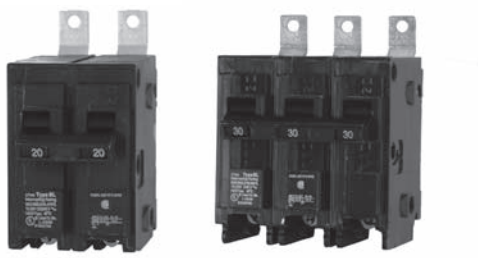

BL **NGB**


Now available from stock Siemens offers **distribution lugs for the NGG circuit breaker** family for use in UL 508A control panels. These lugs will accept up to (6) copper wires from #14 to #4 gauge or aluminum wires from #6 to #4 gauge.

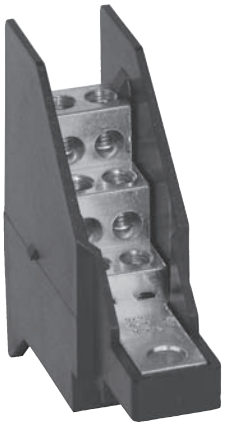

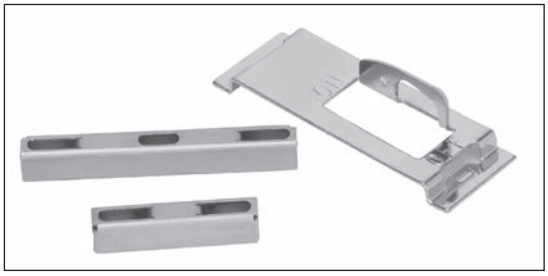

BQD and NGB handle ties are now released for use where single pole breakers are using shared neutrals and must be locked out simultaneously.

Siemens now offers a line of **VL circuit breakers** which are rated for use at **600VDC** with interrupting ratings between 42KAIC and 65KAIC.





Circuit Breaker and Surge Protective Device (SPD)

By installing a Siemens Circuit Breaker and Surge Protective Device (SPD) in the load center of the residence, surge protection is provided for all branch circuits (1).

- UL and CSA, Meets UL 1449 3rd Edition
- Easy to install and perfect for retrofit
- Offer in 15 or 20 amps
- LEDs provide protection status

(1) See warranty for detailed coverage information. www.usa.siemens.com/surge

Ordering

In the FD through RD frames, you may order molded case circuit breakers three basic ways:

- As separately ordered frames, trip units and lugs
- As frame, trip unit and lugs ordered as one catalog number and shipped unassembled or assembled
- As Frame and Trip Unit shipped assembled and with the trip unit made non-removable, in compliance with UL 489 requirements that to be reverse fed the circuit breaker must not have an interchangeable trip unit.

These two options are described in the following:

Components Ordered Separately

To get the components for a 3-pole, 400 Amp standard interrupting circuit breaker, you would order the frame (JD63F400), the trip unit (JD63T400) and six lugs (TA2J6500). This option is normally useful only if you stock and use large volumes of product and wish to reduce your inventory cost. You may stock, for example, a smaller number of frames (JD63F400) and a variety of trip units (JD63T300, JD63T350, etc.) and assemble breakers as you need them.


Frame, Trip Unit and Lugs Ordered Together

If you order the catalog number JD63B400, you will receive a frame, a trip unit and 6 lugs in separate packages. By suffixing this number with "L" (e.g. JD63B400L), you will receive frame, trip unit and lugs assembled in one container. Pursuant to UL 489, a product ordered thus will have the markings "LINE" and "LOAD", and may not be "reverse fed" (with power flowing from the "OFF" end of the breaker toward the "ON" end).

Non-Interchangeable Trip Breakers

If you place an "X" after the frame size designator (e.g. JXD63B400), you will receive a frame and trip unit assembled, with the trip unit made non-removable. If you suffix an "L" to this catalog number (e.g. JXD63B400L), you will receive the breaker, non-removable trip unit and lugs assembled. Unless you anticipate a specific need to change the breaker's ampere rating in the future, this is the preferred ordering method, as the products are assembled to Siemens' specifications in our factories. These breakers are suitable for use reverse fed according to UL 489, since the trip unit is not removable.

The smaller frames (QJ, ED and below) do not have removable trip units, and consequently are shipped only as assembled products. To add lugs, see the ordering instructions on each product's catalog page.

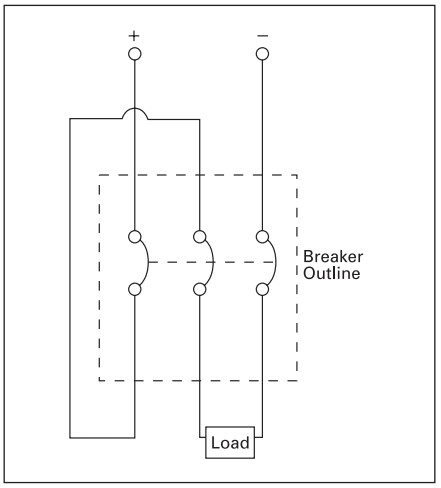

500V DC Wiring Configuration

Connecting Breakers for DC Application

Most Siemens thermal magnetic trip MCCBs are applicable on direct current (dc) systems. Generally, for 250 V dc systems a two pole breaker is used, with one pole on each leg of the supply circuit. For three pole breakers applied on 500 V undergrounded DC systems, it is important to connect the power supply "zig-zag" through the breaker as shown in the figure below. This assures that the Voltage between phases on the breaker terminals is uniformly distributed.

Molded Case Circuit Breakers

Federal Specification Classification

Reference

W-C-375C/GEN

Class	Interrupting Rating: Symmetrical Amperes[1]	Interrupting Rating: Volts AC 60HZ	Poles	Range of Current Trip[3]	Breaker Type (All Circuit Breakers Meet or Exceed the Indicated Class Level)
10a[2]	5,000	120/240	1 or 2	15–100	QP, BQ, QT, BL
10b	5,000	240	2 or 3	15–100	QP, BQ, BQD, CQD, BL
11a	7,500	120	1	15–100	QP, BQ, BQD, CQD, BL
11b	7,500	240	2 or 3	15–100	QP, BQ, BQD, CQD, BL
12a[2]	10,000	120/240	1 or 2	15–100	QP, BQ, QT, ED2, BL
12b	10,000	240	2 or 3	15–225	QP, BQ, QJ2, ED2, BQD, CQD, BL
12c	10,000	277	1	15–100	BQD, CQD, NGG, NGB, NEG, NEB
13a	14,000	277	1	15–100	ED4, BQD, CQD, NGG, NGB, NEG, NEB
13b	14,000	277/480	1, 2, or 3	15–100	ED4, BQD, CQD
14a	22,000	120/240	1 or 2	15–100	QPH, BQH, BLH
14b	22,000	240	2 or 3	70–400	QJH2, QJ2-H, BQH, BQD, CQD, BLH
15a	65,000	120/240	1 or 2	15–100	HQP, HBQ, ED4, HED4, NGG, NGB, NEG, NEB
15b	65,000	240	2 or 3	15–225	ED6, ED4, FXD6, FD6, HED4, BQD, CQD, HQJ2H, NGG, NGB, NEG, NEB
16a	100,000	480	2 or 3	15–225	CFD6, CED6
16b	100,000	600	2 or 3	15–600	CED6, CFD6, CJD6, SCJD6, CLD6, SCLD6
17a	200,000	600	2 or 3	70–2000	—
18a	18,000 14,000 14,000	240 480 600	2 or 3	15–125	ED6, HED6, HHED6
19a	22,000 18,000 14,000	240 480 600	2 or 3	70–225	FXD6, FD6, CFD6, HFD6
20a	25,000 22,000 22,000	240 480 600	2 or 3	70–225	FXD6-A, FD6-A, CFD6, HFD6
21a	42,000 30,000 22,000	240 480 600	2 or 3	70–800	HFD6, CFD6, JXD6(A), JD6(A), SJD6(A), HJD(A), HJXD6(A), HHJD6, SHJD6(A), CJD6, SCJD6, LXD6(A), LD6(A), SLD6(A), HLD6(A), HLXD6(A), HHLD6, SLD6(A), SHLD6(A), CLD6, SCLD6, LMD6, LMXD6, HLMD6, HLMXD6, MD6, MXD6, SMD6, HMD6, HMXD6, SHMD6, CMD6, SCMD6
22a	65,000 25,000 18,000	240 480 600	2 or 3	15–125	CED6, ED6, HED6, HHED6, FXD6-A, FD6-A
23a	65,000 35,000 25,000	240 480 600	2 or 3	70–1200	HHED6, FXD6-A, FD6-A, HFD6, HHFD6, CFD6, JD6(A), JXD6(A), SJD6(A), HJD6(A), HJXD6(A), SHJD6(A), HHJD6, HHJXD6, CJD6, SCJD6, LXD6(A), LD6(A), SLD6(A), HLD6(A), HLXD6(A), SHLD6(A), HHLD6, HHLXD6, CLD6, SCLD6, LMD6, LMXD6, HLMD6, HLMXD6, MD6, MXD6, SMD6, HMD6, HMXD6, SHMD6, CMD6, SCMD6, ND6, NXD6, SND6, HND6, HNXD6, SHND6, CND6, SCND6
24a	65,000 50,000 42,000	240 480 600	2 or 3	1200–2000	PD6, PXD6, HPD6, HPXD6, CPD6 RD6, RXD6, HRD6, HRXD6, SPD6, SHPD6
25a	125,000 80,000 60,000	240 480 600	2 or 3	600–4000	HHLD6, CLD6, CMD6, CND6 SCLD6, SCMD6, SCND6, CPD6

Applicable Standards

UL489 — Molded Case Circuit Breakers and Circuit Breaker Enclosures.

UL486A — Wire Connectors and Solderless Lugs for use with copper wire

UL486B — Wire Connectors and Solderless Lugs for use with aluminum wire

UL943 — Ground Fault Interrupters (for personnel protectors)

UL1087 — Molded Case Switches

UL50 — Cabinets and Boxes

UL869 — Service Equipment

NEMA AB-1 — Molded Case Circuit Breakers and Molded Case Switches

CSA–C22.2 No. 5, C22.2 No. 14

Note:

(A) Molded case circuit breakers are designed and tested in accordance to applicable portions of UL489 and meet application requirements of the National Electric Code. Unless marked otherwise, circuit breakers are 80% duty rated.

(B) Molded case circuit breakers are to be connected with 60 or 75°C wire for circuit breakers having a rated ampacity of 100 amperes or less. Circuit breakers having a rated ampacity greater than 100 amperes shall only be cabled with 75°C cable unless otherwise indicated on the circuit breaker label. Exceptions to this rule are outlined in the article 110-14 C(1)(2) of the 2005 National Electric Code.

[1] Interrupting ratings are not limited to the values or groups of values listed. However, the values listed are minimum values for the class specified.

[2] Single-unit or duplex construction must be specified.

[3] Use minimum frame size for ampere rating.


Molded Case Circuit Breakers


Reference Guide


Thermal-Magnetic Trip Breakers

						Plug-In Breakers						Panelboard Breakers						
						QT	QP, QPP②	QPH, QPPH②	HQP, HQPP②	HQPPH②	QPJ⑨	BL	BLH	HBL	BQD, BQD6	NGB	NEB	HEB
Page						7-21	7-22, 7-24	7-22, 7-24	7-20, 7-24	7-20, 7-24	7-24	7-29	7-29	7-29	7-32	7-33	7-35	7-35
Ratings	AC	Poles				1, 2	1, 2, 3	1, 2, 3	1, 2, 3⑦	2	2, 3	1,2,3	1,2,3	1,2,3	1,2,3	1,2,3	1,2,3	1,2,3
		Amperes				15-50	10-125③④	10-125③④	10-125③⑦	100-225	150-200	10-125	15-125	15-100	15-100	15-125	15-125	15-125
		Volts (50/60 Hz)			1 Pole	120/240	120/240	120/240	120/240	120/240	120/240	120/240	120/240	120/240	277	347	347	347
					2 Pole							120/240	120/240	120/240	480/277	600/347	600/347	600/347
					3 Pole	—	240	240	240	240	240	240	240	240	480/277	600/347	600/347	600/347
		Interrupt Ratings	UL		120V	10,000	10,000	22,000	65,000	—	—	10000	22000	65000	65000	—	—	—
					240V	10,000	10,000	22,000	65,000	100,000	10,000	10000	22000	65000	65000	100000	85000	100000
					277V	—	—	—	—	—	—	—	—	—	14000	—	—	—
					347V	—	—	—	—	—	—	—	—	—	10000	—	—	—
					480/277V	—	—	—	—	—	—	—	—	—	14000	25000	—	—
					480V	—	—	—	—	—	—	—	—	—	—	—	35000	65000
					600/347V	—	—	—	—	—	—	—	—	—	10000	14000	—	—
					600V	—	—	—	—	—	—	—	—	—	—	—	22000	25000
			IEC 947-2 50/60 Hz	220/240V	I_{CU}	—	—	—	—	—	—	—	—	—	—	65000	85000	100000
					I_{CS}	—	—	—	—	—	—	—	—	—	—	32000	42000	50000
				380/415V	I_{CU}	—	—	—	—	—	—	—	—	—	—	25000	40000	70000
					I_{CS}	—	—	—	—	—	—	—	—	—	—	12000	20000	35000
				500V	I_{CU}	—	—	—	—	—	—	—	—	—	—	—	—	—
					I_{CS}	—	—	—	—	—	—	—	—	—	—	—	—	—
	DC	125/250 V DC Interrupting Rating			2-Pole	—	—	—	—	—	—	—	—	—	14000	14000	35000	42000
					3-Pole	—	—	—	—	—	—	—	—	—	—	—	35000	42000
Dimensions in Inches	Height				10-50A	—	2.87	2.87	—	—	—	3.56	3.56	3.75	4.50	5.00	5.50	5.50
					10-60A	3.12	—	—	—	—	—	—	—	—	—	—	—	—
					55-125A	—	3.12	3.12	3.12	3.12	3⑨	3.75	3.75	3.75	4.50	5.00	5.50	5.50
	Width				1-Pole	1.00	1.00	1.00	1.00	—	—	1.00	1.00	1.00	1.00	1.00	1.00	1.00
					2-Pole	2.00①	2.00②	2.00②	2.00	4.00②	⑨	2.00	2.00	2.00	2.00	2.00	2.00	2.00
					3-Pole	2.00①	3.00	3.00	3.00	—	3.00⑨	3.00	3.00	3.00	3.00	3.00	3.00	3.00
	Depth					2.06	2.37	2.37	2.37	2.37	2.34	2.37	2.37	2.37	2.69	2.71	3.00	3.00
Overcurrent Devices	Thermal and Fixed magnetic Trip					√	√	√	√	√	√	√	√	√	√	√	√	√
	Thermal and Adjustable Magnetic trip					—	—	—	—	—	—	—	—	—	—	—	—	—
	Adjustable Magnetic trip only					—	—	—	—	—	—	—	—	—	—	—	—	—
	Motor Circuit Protector					—	—	—	—	—	—	—	—	—	—	—	—	—
	Molded Case Switch					—	√⑥	—	—	—	—	—	—	—	—	—	√	√
Accessories & Modifications	Undervoltage Trip					—	—	—	—	—	—	—	—	—	√	—	√	√
	Shunt Trip					—	√⑥	√⑥	√⑧	√⑧	—	√	√	√	√	√	√	√
	Auxilary Switch					—	—	—	—	√⑧	—	√	√	√	√	√	√	√
	Alarm Switch					—	—	—	—	—	—	—	—	—	√	√	√	√
	Mechanical Interlock					—	—	—	—	—	—	—	—	—	—	—	√	√
	Fungus Proofing (ref. page 7-91)					—	—	—	—	—	—	√	√	√	√	√	√	√
Individual Enclosures	Type 1 - Indoor Surface					√	√	√	√	√	—							
	Type 1 - Indoor, Flush					—	√	√	√	√	—							
	Type 3R - Outdoor-Rainproof					—	√	√	√	√	—							


QP

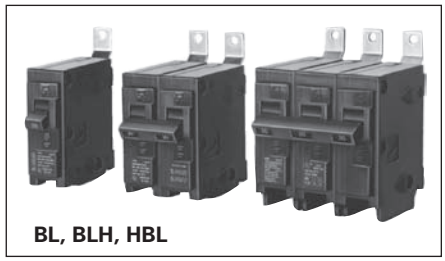
BL, BLH, HBL


BQD, BQD6


NGB


NEB/HEB

For inches / millimeters conversion, see Application Data section.
For Plug-in Breakers, see Load Centers & Circuit Breakers section.

①BQD6 CSA certified 10,000A @ 600Y/347V 15–70A only.
②Types QPP, QPPH, HQPP and HQPPH are special 2-pole configurations for metering equipment. Amperage range = 125–225A, width = 4 in.
③Single pole breakers available in ratings 10–70A only.
④125A, 2-pole 120/240V AC only.
⑥Not applicable to types QPP and QPPH.
⑦Single pole circuit breakers available in ratings 15-70A only, 125A available as a 2-pole only.
⑧Not applicable to type HQPP and HQPPH.
⑨Fits only Siemens EQIII load centers. Breaker is 2 or 3 poles wide.

Molded Case Circuit Breakers

Panelboard Mounting with INSTA-WIRE

1-Pole Bolt-On (120V AC)⑤

Continuous Current Rating @ 40° C	Type BL① 10,000A IR Catalog Number	Type BLH① 22,000A IR Catalog Number	Type HBL 65,000A IR Catalog Number
10⑨	B110	—	—
15	B115④	B115H④	B115HH④
20	B120④	B120H④	B120HH④
25	B125	B125H	B125HH■
30	B130	B130H	B130HH
35	B135	B135H■	B135HH■
40	B140	B140H	B140HH
45	B145■	B145H■	B145HH■
50	B150	B150H	B150HH■
60	B160	B160H■	B160HH■
70	B170	B170H■	B170HH■

2-Pole Bolt-On (Common-Trip 120/240V AC)⑥


10	B210	—	—
15	B215	B215H	B215HH
20	B220	B220H	B220HH
25	B225	B225H■	B225HH■
30	B230	B230H	B230HH
35	B235	B235H■	B235HH■
40	B240	B240H	B240HH
45	B245	B245H■	B245HH■
50	B250	B250H	B250HH
60	B260	B260H	B260HH
70	B270	B270H■	B270HH■
80	B280	B280H■	B280HH■
90	B290	B290H■	B290HH■
100	B2100	B2100H	B2100HH
110	B2110■	B2110H■	B2110HH■
125	B2125	B2125H	B2125HH■


2-Pole Bolt-On (Common-Trip 240V AC)③⑥⑩

15	B215R	—	—
20	B220R	—	—
30	B230R	—	—
40	B240R■	—	—
50	B250R	—	—
60	B260R	—	—
70	B270R■	—	—
80	B280R■	—	—
90	B290R■	—	—
100	B2100R■	—	—

3-Pole Bolt-On (Common-Trip 240V AC)⑦

15	B315	B315H	B315HH
20	B320	B320H	B320HH
25	B325	B325H	B325HH■
30	B330	B330H	B330HH
35	B335	B335H■	B335HH■
40	B340	B340H	B340HH
45	B345	B345H■	B345HH■
50	B350	B350H	B350HH
60	B360	B360H	B360HH
70	B370	B370H	B370HH
80	B380	B380H■	B380HH
90	B390	B390H■	B390HH
100	B3100	B3100H	B3100HH

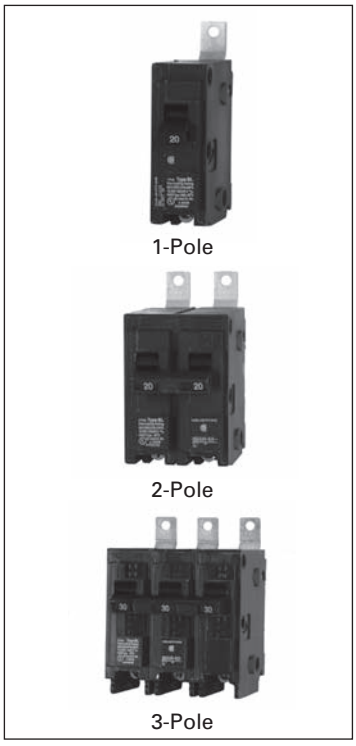

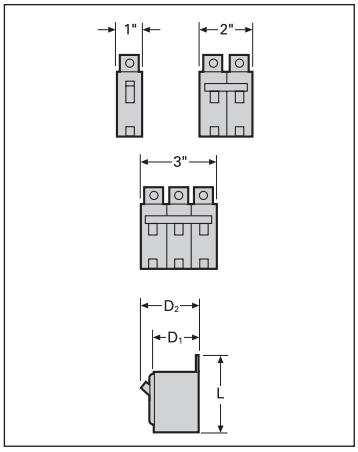

Breaker Type	Amperes	Dimensions L	D1	D2
BL, BLH	15–50	3 9/16	2 3/8	3
BL, BLH	55–125	3 3/4	2 3/8	3
HBL	15–125	3 3/4	2 3/8	3

BL/BLH/HBL Internal Accessories

Description	Catalog Number	Field/Factory Installed
120V Shunt Trip	add suffix...00S01■	Factory
24V Shunt Trip	add suffix...00S07■	Factory
120V Auxiliary Switch	add suffix...01■②	Factory

Modifications

Description	Catalog Number
400Hz Calibration	add suffix...Y⑧
Marine 50˚C Ambient Calibration	add suffix...M
Fungus Proofing	add suffix...F

For external accessories, please refer to page 7-93

■ Built to order. Allow 2-3 weeks for delivery

① UL Listed for use with 60/75° wire through 40 amps, UL listed for use with 75° wire only for 50 amps and above, HACR rated. 120V AC Fluorescent Lighting.

②1A and 1B contacts.

③UL Listed for use on 3-phase grounded "B" systems — 10,000 for this application.

④UL Listed for frequent switching applications (SWD).

⑤Shipped 12 per sleeve.

⑥Shipped 6 per sleeve.

⑦Shipped 4 per sleeve.

⑧UL Listed 5KA IR.

⑨10 Amp breaker does not have INSTA-WIRE.

⑩For 3 Phase Applications.

Lug information

Mechanical Lug

Selection

For Use With Type(s)	Circuit Breaker Ampere Rating	Cables Per Lug	Lug Wire Range	Catalog Number
BQ, BQH, BQHF BQE, BQF, BL, BLH, HBL, HBQ Switching Neutrals BG, BLG	**Line Side**			
	15–40	1 1	#14–#6 AWG Cu #12–#6 AWG Al	**TC1Q1**①②
	45–125	1 1	#8–#1 AWG Cu #6–#1/0 AWG Al	**TA1Q1**②
	Load Side			
	15–20	1 1	#14–#10 AWG Cu #12–#10 AWG Al	Lugs are integral to Circuit Breaker
	25–35	1 1	#14–#6 AWG Cu #12–#6 AWG Al	
	40–50	1 1	#8–#6 AWG Cu #8–#4 AWG Al	
	55–70	1 1	#8–#4 AWG Cu #8–#2 AWG Al	
	80–100	1 1	#4–#1/0 AWG Cu #2–#1/0 AWG Al	
	110–125	1 1	#2–#1/0 AWG Cu #1/0–#2/0 AWG Al	
BQD, CQD BQD6, CQD6	**Line Side (CQD, CQD6) & Load Side**			
	15–40	1	#14–#6 AWG Cu #12–#6 AWG Al	Integral
	45–100	1	#8–#1 AWG Cu #6–#1/0 AWG Al	Integral
NGG, HGG, LGG	15–30	1	#14–#6 AWG Cu #12–#6 AWG Al	**TC1Q1**
	15–30	1	#14–#6 AWG Cu #12–#6 AWG Al	**3TC1Q1** (pkg. of 3)
	35–125	1	#8–#1/0 AWG Cu #8–#2/0 AWG Al	**3TC1GG20** (pkg. of 3)
	15–125	—	NUT KEEPER PLATE	**TNKG3**③ (pkg. of 3)
NEG, HEG	15-125	1	#14-3/0 AWG Cu	**3TW1EG30** (pkg. of 3)
	15-125	1	#14-1/0 AWG Cu/Al	**3TA1EG10** (pkg. of 3)
	15-125	1	#6-3/0 AWG Cu/Al	**3TA1EG30** (pkg. of 3)
	15-125	—	Nut Keeper Kit (3-pole)	**TNKE3** (pkg. of 3)
	15-125	—	Nut Keeper Kit (4-pole)	**TNKE4** (pkg. of 4)

Connector wire ranges and cavities are established in conjunction with Table 6.1.4.2.1 of UL 489 standards.

Note:

(A) Molded case circuit breakers having a rated ampacity of 125 amperes or less are to be connected with 60 or 75°C wire. Circuit breakers having a rated ampacity greater than 125 amperes shall only be cabled with 75°C cable unless otherwise indicated on the circuit breaker label. Exceptions to this rule are outlined in article 110-14 C(1)(2) of the 2005 National Electrical Code.

(B) Connector wire ranges and cavities are established in conjunction with Table 6.1.4.2.1 of UL 489 standards.

① Lug is steel.
② Sold in package of six.
③ One nut keeper plate is required with each lug on the NGG breaker.

Panelboards

General Specifications

General

Bussing Sequence

Interiors are designed to accommodate top or bottom feed. Regardless of which is specified, the uppermost pole is always on "A" phase; the second pole down is always on "B" phase, and the third pole down is always on "C" phase (assuming 3Ø panel).

As standard, branch breakers shall be mounted at the top of the panel with "spaces" at the bottom, regardless of the direction panel is fed.

All breakers have bolted connections except plug-in type. The panel design provides bracing up to 200,000A IR UL short circuit rating. Case-hardened, high performance, thread rolling screws are used on branch bus.




Circuit Breaker Lighting Panel Type P1



Circuit Breaker Lighting or Distribution Panel Types P2/P3



Circuit Breaker Distribution Panel Type P4/P5

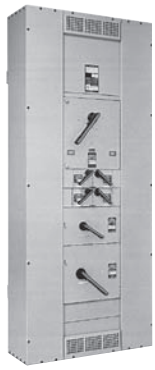

Fusible Switch Distribution Panel Type P4/P5

Panelboard Ratings

Description	P1	P2	P3	P4	P5
Max. Voltage	480Y/277V AC Max. 250V DC Max	600V AC Max. 500V DC Max.	600V AC Max. 500V DC Max.	600V AC Max. 500V DC Max.	600V AC Max. 500V DC Max.
System	1-Phase, 2-wire 1-Phase, 3-wire 3-Phase, 3-wire 3-Phase, 4-wire	1-Phase, 2-wire 1-Phase, 3-wire 3-Phase, 3-wire 3-Phase, 4-wire	1-Phase, 2-wire 1-Phase, 3-wire 3-Phase, 4-wire 3-Phase, 3-wire	1-Phase, 3-wire 3-Phase, 4-wire 3-Phase, 3-wire	1-Phase, 3-wire 3-Phase, 4-wire 3-Phase, 3-wire
Mains					
Main Lugs Main Breaker Main Switch	125A-400A 100A-400A —	125A-600A 100A-600A —	250A-800A 225A-600A —	400A-1200A 400A-800A —	800A-1200A 800A-1200A 200A-1200A
Circuits	18, 30, 42	18, 30, 42, 54, 66 78, 90 ①	—	—	—
Branch Ratings	15-125A ②	15-400A	15-400A	15-800A MCCB 30-200A Fusible	15-1200A MCCB 30-1200 Fusible
Branch Disconnect Devices	BL, BLH, HBL, BQD, BQD6, BLE, BLEH, BLF, BLHF, BAF, BAFH, BGL, NGB ⑦	BL, BLH, HBL, BQD, BQD6, QJ2, HQJ2, QJ2H, HQJ2H⑤, ED2, ED4, HED4, ED6, HHED6, BLE, BLEH, BLF, BLHF, BAF, BAFH, BGL, NGB	BL, BLH, HBL, BQD, BQD6, QJ2, HQJ2, QJ2H, HQJ2H⑥, ED2, ED4, HED4, ED6, BLHF, BAF, BAFH, BGL, NGB, NEB, HEB	All 15-1200A MCCBs, VL MG at 800A and 30-200A VB switches	All 15-1200A MCCBs, 30-600A VB switches and 400-1200A HCP switches
Subfeed Circuit Breakers ②③	ED2, ED4, ED6, HED4, HED6, QJ2, QJH2, QJ2-H, FD6, HFD6, FXD6, HFXD6	JD6, HJD6, JXD6, HJXD6, FD6, HFD6, FXD6, HFXD6	JD6, HJD6, JXD6, FD6, HFD6, FXD6, HFXD6	—	—
Enclosure Heights Inches – (mm)	32, 38, 44 @250 A (813, 965, 1118) 56, 62, 68 @400 A (1422, 1575, 1727)	26, 32, 38, 44, 50, 56, 62, 68, 74 (660-1880)	56, 62, 68, 74, 80 (1422-2032)	60, 75, 90 (1524, 1905, 2286)	60, 75, 90 (1524, 1905, 2286)
Standard Trims	Fas-Latch – 1 Piece Surface or Flush	Fas-Latch – 1 Piece Surface or Flush	Fas-Latch – 1 Piece Surface or Flush	Four Piece④ Surface or Flush	Four Piece④ Surface or Flush

① Functional pricing is based on circuits shown. However, the panel can be figured with less circuits.
② P1 can have 1 subfeed breaker. P2 and P3 can have up to (2) FD subfeed breakers.
③ JD and FD breakers are mounted vertical. Limitations apply.
④ Trim ring provided for flush applications.
⑤ A maximum of (4) QJ breakers may be mounted in a P2 Panel and are single mounted.
⑥ A maximum of (6) QJ breakers may be mounted in a P3 panel and are twin mounted.
⑦ P1 panels with NGB breakers are limited to NGB branch devices only. BL and BQD frames may not be mixed in this panel type.